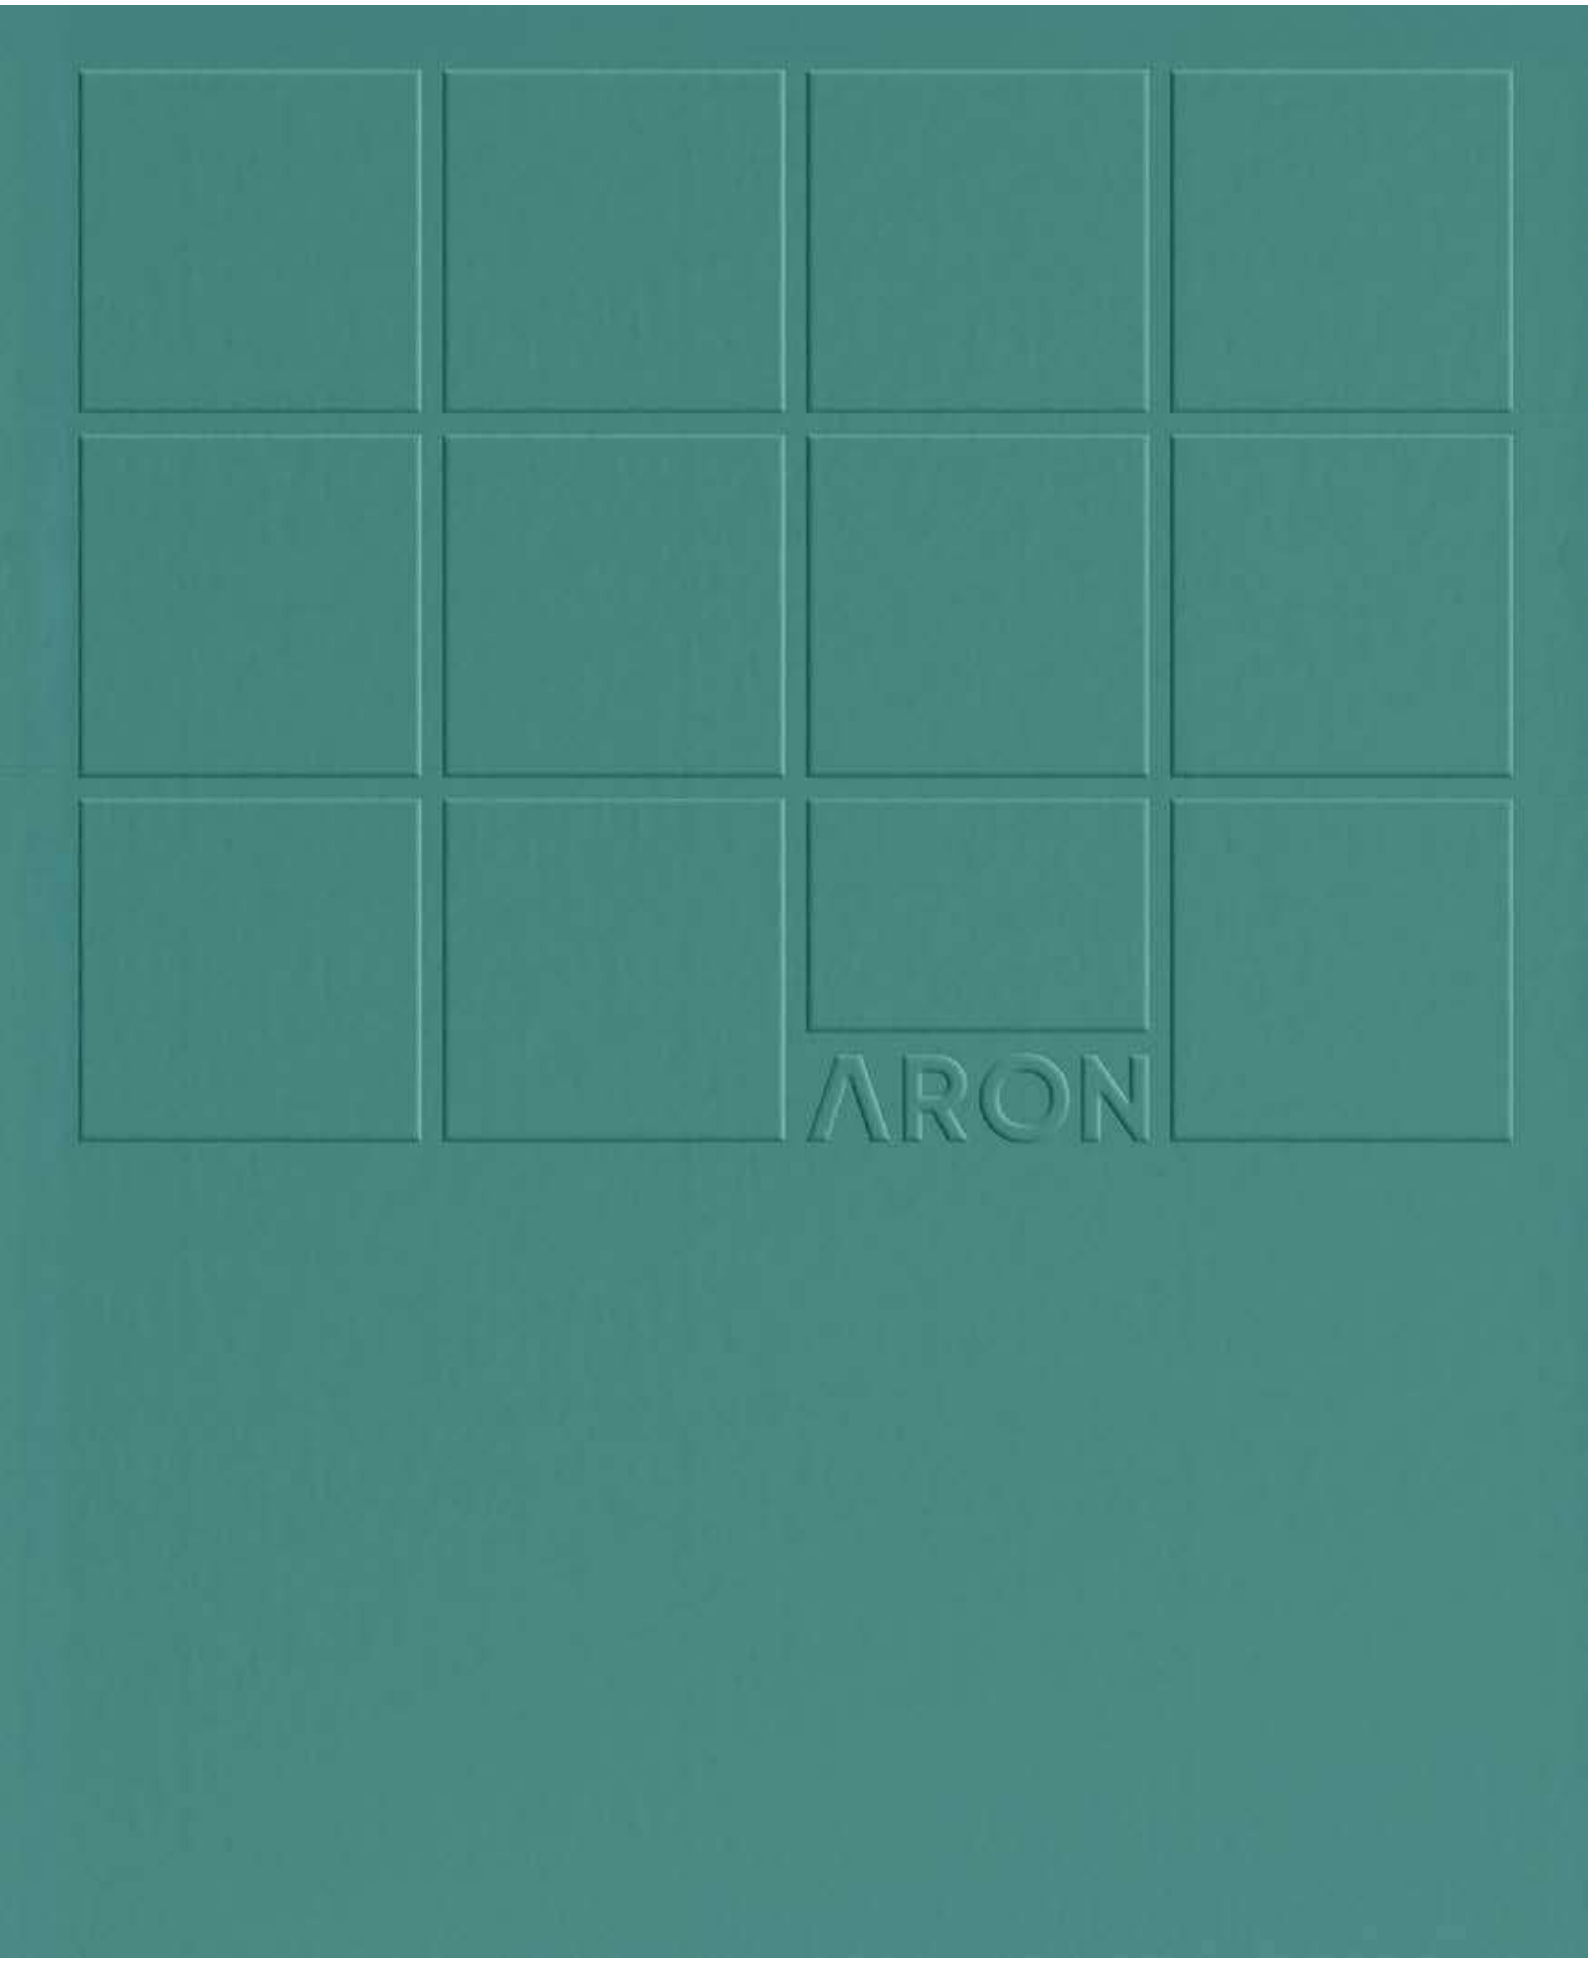

ARON

ARON

PROFESSIONAL CATALOG


The Light House. ARON

Lighting for People.

Designing light for people is not a trend; it is a return to the essence of lighting — caring for human life, health and emotions.
For a long time, light was seen only as a technical requirement, measured in numbers and standards. But light is not experienced by spaces. It is experienced by the people who live in them.
When lighting is designed around human presence, it goes beyond compliance and begins to create comfort, balance, and a genuine sense of well-being.

Pensar a luz para as pessoas não é uma moda. É voltar ao essencial da iluminação: melhorar a forma como vivemos, trabalhamos e nos sentimos nos espaços.
Durante muitos anos, a luz foi tratada apenas como um requisito técnico, definida por valores, normas e cálculos. Mas a luz não é vivida pelos espaços — é vivida pelas pessoas.
Quando a iluminação parte da presença humana, deixa de ser apenas cumprir regras e passa a criar conforto visual, equilíbrio e uma sensação real de bem-estar no dia a dia.

Manuel Vidigal
Aron CEO

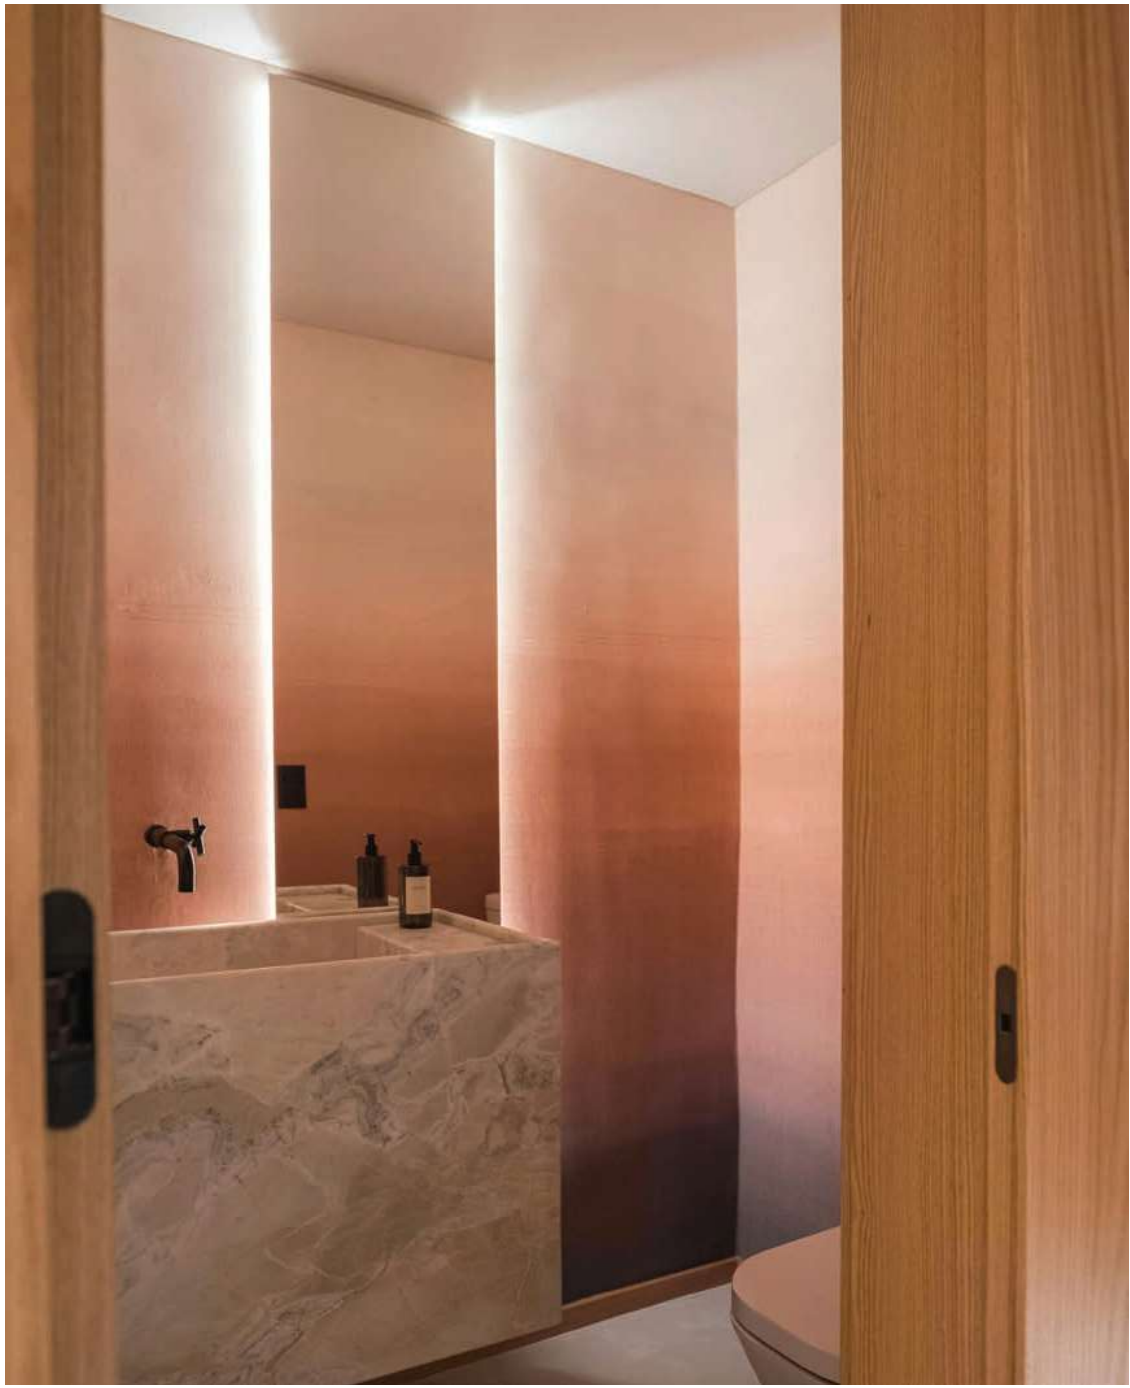

About Aron

2015 BORN IN PORTUGAL

Founded in Portugal in 2015, the brand was created with a clear focus that Lighting should be simple to specify, easy to install, and strong enough to last — without losing design identity.
Aron designs and develops lighting solutions that combine clean design, reliable technology, and competitive pricing, created specifically for the needs of architects, lighting designers, and distributors.

2016 FIRST EXHIBITION IN PORTO

In 2016, we presented our first collection at an exhibition in Porto. This milestone marked our entry into the professional lighting market and the beginning of direct collaboration with market professionals.

2017-2020 PORTUGAL-SPAIN LOCAL TEAM

After establishing a strong and consistent presence in the Portuguese market, we took our first international step in 2020 by entering Spain, expanding our reach and reinforcing our ambition to grow sustainably across Europe.

International Expansion

2022 FIRST LIGHT + BUILDING

Exhibiting at Light + Building in Frankfurt in 2022 was a defining moment, giving us visibility on a global stage and confirming our positioning within the European architectural lighting sector.

2024 LOCAL TEAM IN ITALY AND FRANCE

In 2024, we extended our presence to Italy and France, strengthening our network in two markets known for their strong design identity and high technical standards.

+3000 Products

+500 Distributors

Founded in Lisbon, built through distribution, driven by design

2025 EXPORT TO 20 MARKETS

Alongside our local teams in Portugal, France, Spain, and Italy, 2025 marked a major international milestone as we expanded our export network, supplying our products to more than 20 countries through trusted partners and distributors.

2026 ARCHITECTURAL PRODUCT LINE

In 2026, we will introduce a dedicated architectural product line developed through close collaboration with lighting designers. The range is based on clear geometric forms, focusing on practical performance, modularity, and reliable integration into architectural spaces, supporting a wide variety of professional lighting applications.



Lighting Projects & Control




At Aronlight, we aim to provide the most suitable control systems for any environment. We offer both wired and wireless (RF) solutions, with the ability to integrate motion and occupancy sensors, delivering detailed technical information about the luminaires, including energy consumption and failure reports.

Our systems can operate either as standalone solutions or integrated with dedicated management platforms, available locally or remotely. Our solutions support the most advanced protocols, such as Bluetooth Mesh, Zigbee, and LoRa, among others.

Furthermore, our luminaires are compatible with the most widely used lighting control protocols, including DALI, 0–10V, Triac, and DMX.

zigbee · LoRa · DALI · 0-10V · DMX512

Across Sectors

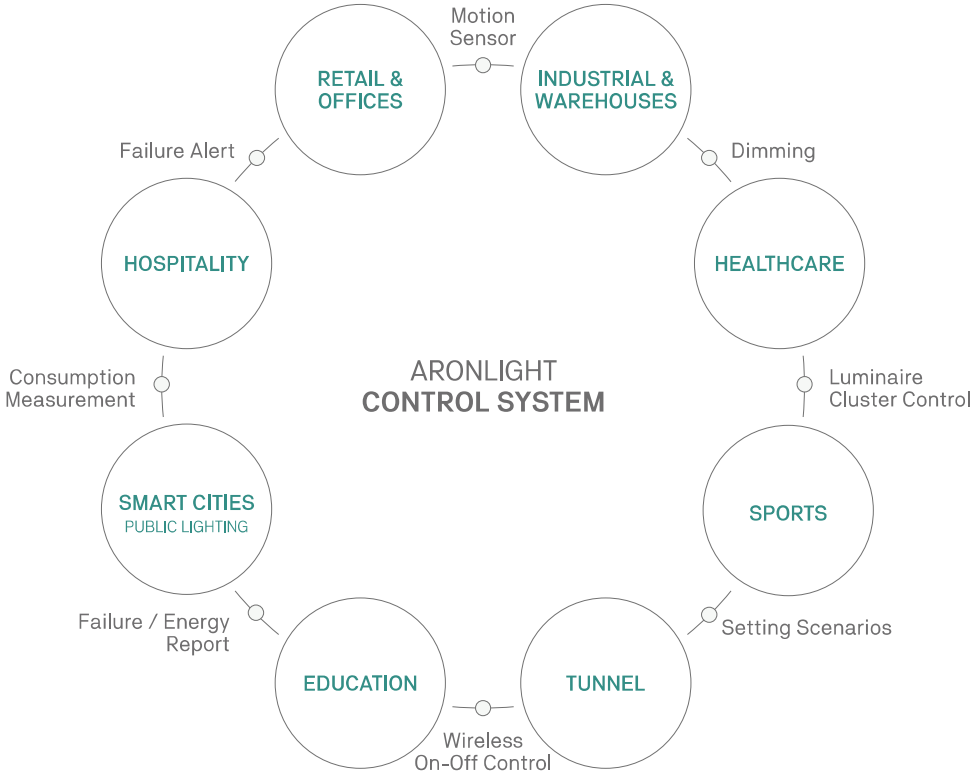

24 - 48 **INTERIOR RECESSED**


page.26
PETI


page.27
BERG TRIMLESS


page.28
GABI


page.30
BEN


page.31
LUKE


page.32
TORQ


page.33
MODULE EYE ZOOM


page.34
JACK


page.34
ROB


page.35
MATT


page.36
GLAZ


page.37
ETAN


page.38
ECO SPOTLIGHT

page.38
LUSO


page.38
ONE


page.39
VAUN


page.39
HALE


page.39
ACE

page.39
LOKI

page.40
UNA II ROUND

page.40
UNA II SQUARE

page.40
FLEXI II


page.41
STRIX


page.42
VESTA


page.43
BRIL


page.44
QUANT ONE


page.44
QUANT DOUBLE


page.44
QUANT TRIPLE


page.45
RITZ


page.45
CHIADO


page.45
JAZ ROUND

page.45
JAZ SQUARE


page.48
ROUND PANEL


page.48
SQUARE PANEL

page.48
LED PANEL BACKLIT

49 - 52 **BACKLIT LED PANEL**

page.50
BACKLIT 600X600


page.50
LYSS PRO 600X600


page.51
BACKLIT 1200X300

page.52
BOARDO SURFACE

page.52
BOARD SURFACE

53 - 57 **EDGELIT LED PANEL**

page.54
EDGELIT PRO 600X600

page.54
EDGELIT PRO 600X300

page.54
EDGELIT PRO 1200X300

page.55
EDGELIT PRO 1500X300

page.55
EDGELIT PRO 1200X600

58 - 77 **INTERIOR LINEAR LIGHT AND SUSPENSION**

page.60
LYNX LINEAR

page.61
SCHOOL WALL WASH

page.62
LINEAR MODULAR

page.63
LYNX LINEAR

page.64
LYNX EVO

page.65
LYNX SLIM

page.66
SLASH

page.67
TRACE

page.68
THANE

page.69
AURA CIRCULAR

page.70
VISTA

page.71
LUNA

page.72
OFFICE PRO V2

page.73
FIZI

page.73
PASCAL

page.74
PASCAL GU10

page.75
LUNO

page.76
VIRA

page.77
JULLE

page.77
NOVVA

78 - 93 **INTERIOR SURFACE LIGHT**

page.80
VIGG

page.81
ASH

page.81
DESMI

page.82
LEV

page.83
VIGG GU10

page.83
LEV GU10

page.83
MINI LEV GU10

page.84
PRADO GU10

page.84
NATAN

page.84
NATAN

page.84
NATAN

page.85
ROLL

page.85
LUPO WALL

page.86
TIDE

page.87
DUNA

page.88
CUBE

page.89
ALPI

page.90
FREDI

page.91
AIKA

page.92
HAIA

page.92
KIRA


94 - 109 **48V PROFESSIONAL LIGHTING**


page.98 LINEAR DOT


page.98 LINEAR DOT ROTABLE


page.101 LINEAR OPAL


page.101 CORNER OPAL


page.102 SUSPENDED BALL


page.103 SUSPENDED DROP


page.103 SUSPENDED TUBE


page.104 SPOTLIGHT


page.104 SPOTLIGHT ZOOMABLE

110 - 119 **INTERIOR TRACKLIGHT**


page.112 PRADO PRO


page.113 PRADO ZOOM


page.114 PRADO SMART


page.115 NATAN GU10


page.115 LINEA


page.118 TRUNKING LIGHT


page.119 SENA

120 - 143 **EXTERIOR WALL SURFACE**


page.122 CHUNK


page.123 CLIF


page.124 HARPE


page.125 PINE


page.125 ALDER



page.126 PARKE GU10


page.127 BAO


page.127 ABRITER


page.128 FISHER


page.129 CANA PRO


page.130 ARCO


page.131 KANE WALL


page.131 ALFA WALL

page.132 LINCE

page.132 LOG


page.133 TAKO



page.133 LYRA



page.134 AXEL



page.134 NUT


page.135 THULE


page.135 AXIS


page.136 ARI


page.136 GATE


page.137 TULIP

120 - 143 **EXTERIOR WALL SURFACE**

page.137 ELM

page.138 STUDE

page.139 ARLO

page.139 ST53KH LUMINAIRE

page.139 NORA

page.140 PHIL

page.140 FENIX

page.140 NOA

page.141 CANA

page.141 IVY

page.141 HANA

page.141 INDIGO

page.142 AVENCA

page.142 CARMO

page.143 ASTER

page.143 JADE

page.143 HERA

144 - 159 **EXTERIOR RECESSED**

page.146 NIXEN

page.146 LEIA

page.147 VOXEL

page.147 VITA

page.148 CUADRADO

page.148 CEDAR

page.149 SKILL

page.150 SPOTLIGHT

page.151 MELLER

page.152 MELLER II

page.153 PINI

page.154 SLIT

page.155 KATA

page.156 VINI

page.156 KARI

page.157 OTTO

page.157 OAK

page.158 JOCKA

page.159 OTTO ROTABLE

page.159 ABBA

page.159 INGROUND SYS-RD

160 - 177 **EXTERIOR SPOTS AND BOLLARDS**

page.162 LUPO

page.162 GARDEN LIGHT FUTC11

page.163 HAZEL

page.163 SAGE

page.163 AGAVE GU10

page.164 AGAVE SMD

160 - 177 **EXTERIOR SPOTS AND BOLLARDS**


page.164
SIG


page.165
VALL II


page.165
VALL


page.166
PULSE

page.167
MARI

page.168
PIRI

page.169
SHIRA


page.169
ALFA


page.170
KANE

page.170
SLOT

page.171
BOLLARD BERY

page.171
SINTRA

page.172
TERY

page.173
DOT


page.173
LIV

page.174
ARCHI

page.175
JEDAI

page.175
CALY


page.176
CIMA SLOT


page.176
CIMA CALY


page.177
CIMA NERO

178 - 179 **UNDERWATER LIGHT**


page.179
UNDERWATER UW03


page.179
POOL LIGHT



page.179
POOL LIGHT

180 - 187 **EXTERIOR FACADE LIGHTING**



page.182
GARDEN LIGHT


page.183
LINEAR WALL WASHER


page.184
WALL WASHER RL5-24


page.185
ARC MINI


page.185
ARC COMBI


page.185
ARC PRO


page.186
ARC COLOSSUS


page.186
ARC LINE



page.186
ARC LINE RECESSED


page.187
PILENE

188 - 191 **WORKLIGHT CONSTRUCTION LIGHTING**


page.190
POCKET PROJECTOR


page.190
WORKLIGHT BOLD


page.190
WORK LED STRIP


page.191
STRING PROJECTOR

192 - 204 **SOLAR GARDEN**


page.194
BLOK


page.194
KOY

page.195
ZUN

page.196
MARLO

page.197
NATAN

page.198
BIRK

page.199
FLOOD SOLAR PRO II

page.200
FLOX

page.200
LEO

page.200
SABI

page.201
LOTUS

page.201
BOLLARD

page.202
MOSS

page.203
PLUTO

page.204
RUN

205 - 209 **PLAFON LIGHTING**

page.206
LIA

page.206
CALISTO

page.206
MIRANDA 3CCT

page.207
LEVI

page.207
GLENDA

page.208
DALIA

page.208
MOON

page.208
MARS

page.208
HALF MOON

page.208
HALF MARS

page.208
LARA

page.209
RUMU

210 - 219 **INTERIOR BATTENS**

page.212
SEAM

page.212
MEGALISM

page.213
CABINET T5 ROTABLE

page.214
T5 PRO

page.214
KAYA

page.215
BOX T8

page.215
ARMADURA T8

page.215
RÉGUAS T8

page.216
SMD

page.216
NEXOR

page.217
TITAN

page.218
INTEL TRI-PROOF

210 - 219 **INTERIOR BATTENS**


page.219
DURA TERMAX


page.219
DURA PRO - HACCP

220 - 229 **FLOODLIGHT PROJECTORS**


page.222
SPECTRA 3CCT


page.222
SPECTRA SENSOR


page.224
PROJECTOR SLIM


page.224
POLYCARBONATE


page.225
BLAZE


page.225
MASTER PRO


page.226
ASTRO EVO


page.226
PADELITE ECO


page.227
PADELITE PRO


page.228
TECH PRO


page.228
ULTRAMAX


page.229
TECH DIMMABLE


page.229
TECH II DIMÁVEL

230 - 237 **INDUSTRIAL LIGHTING**


page.232
MASTER DIMMABLE


page.232
MASTER II 3CCT


page.233
TECH EVO


page.234
COBALT


page.234
TECH


page.234
DOB ECO


page.235
HIGH TEMPERATURE


page.235
SIRIUS


page.236
LINEAR LUMIA


page.237
GAS STATION PRO

238 - 251 **STREET LIGHT**


page.240
VERSATILE


page.241
NEXA

page.242
ZINI


page.243
ARIES


page.244
EXCELSIOR


page.244
ORBIT


page.244
BALLON


page.245
LUCCI


page.246
VILLA


page.246
FERNANDINA


page.246
RETROFIT KIT


page.247
CONVERT

238 - 251 **STREET LIGHT**


page.248
URBAN DESIGN II


page.249
URBAN PRO


page.250
URBAN EMMA

page.251
URBAN ECO

252 - 255 **SOLAR STREET LIGHTING**

page.254
LEAN SOLAR

page.254
SQUARE SOLAR

page.255
HEKOS SOLAR

page.255
TABITI SOLAR

256 - 259 **ATEX LIGHTING**

page.257
ATEX LINEARTOP

page.258
ATEX HIGHTOP

page.258
ATEX EMERGENCY

page.259
ATEX FLOODTOP

260 - 275 **MOTION DETECTORS**

page.262
ST02

page.262
ST31

page.262
ST31C

page.262
ST32

page.263
ST754

page.263
ST11

page.263
MOTION SENSOR

page.263
ST09

page.264
ST18B

page.264
AR18X

page.264
ST15

page.264
ST701E

page.265
MICROWAVE / PRESENCE

page.265
SENSOR PHOTOCELL

page.265
ST24 DIP SWITCH

page.265
ST302

page.265
ST330 1-10V

page.266
ST40

page.266
ST41

page.266
AR41

page.267
ST753

page.267
ST40A

page.267
ST331 1-10V

page.267
ST41H

page.268
INFRARED PRESENCE

page.268
LONG RANGE

page.268
ST42C

page.268
ST05DA3 DALI

page.269
ST05DA1 DALI

page.269
ST759

260 - 275 **MOTION DETECTORS**


page.269
LONG RANGE


page.269
ST05A

page.270
MICROWAVE PRESENCE

page.270
MICROWAVE LONG RANGE


page.270
INFRARED PRESENCE


page.270
INFRARED

page.271
ST05L


page.271
AR46X/G


page.271
ST07B


page.272
ST705A


page.272
LED PANEL WITH SENSOR


page.272
PLAFON WITH SENSOR


page.272
LUMINAIRE WITH SENSOR

page.273
PLAFON WITH SENSOR

page.273
WALL LUMINAIRE


page.273
WALL LUMINAIRE


page.273
WALL LUMINAIRE

page.274
WALL LUMINAIRE


page.274
WALL LUMINAIRE

page.274
BULB WITH SENSOR

276 - 285 **EMERGENCY LIGHTING**


page.278
SAFELUX


page.278
SAFELUX DOUBLE


page.279
EASYLUX II


page.279
DUOLUX


page.280
LONGLUX


page.281
POWERLUX


page.281
POWERLUX SLIM


page.282
DOTLUX

page.282
DOTLUX PRO


page.282
EMERGENCY PROJECTOR


page.283
SIGLUX 5-IN-1

286 - 289 **HORTICULTURE**


page.288
HORTI GREEN


page.288
HORTI FRAME MARS

page.288
HORTI HYDRO MASTER TUBE


page.289
HORTI CHROME 4

page.289
HORTI UV-PRO

290 - 295 **FITTING GU10 AROS**


page.291
MACH SQUARE


page.291
MACH ROUND


page.291
ROUND


page.291
MACH SQUARE V2

page.291
MACH ROUND V2

page.291
MACH SQUARE

290 - 295 **FITTING GU10 AROS**

page.292
MACH ROUND

page.292
ROUND

page.292
SQUARE

page.292
MACH ROUND TRIMLESS

page.292
HALE

page.293
MACH SQUARE

page.293
MACH ROUND

page.293
SQUARE

page.293
ROUND

296 - 305 **LAMPS TUBES**

page.297
GU10 120°

page.297
GU10 38°

page.297
GU10 DIMMABLE

page.297
MODULE

page.297
MODULE DIMMABLE

page.298
G4 / G9

page.298
CANDLE

page.298
G45

page.298
A60

page.299
A60 SMOKY

page.299
A60 GOLD/SILVER

page.299
A100

page.299
G95 GLOBO

page.299
G95 GLOBO GOLD/SILVER

page.300
G125 CRISTAL / AMBER

page.300
ST64

page.300
ST64 DECO

page.300
G125 DECO DIMMABLE

page.300
G125 CRYSTAL

page.301
DECO DIMMABLE

page.301
G95 SMOKY DIMMABLE

page.301
E14 CLASSIC

page.301
G45 CLASSIC

page.302
E27 CLASSIC

page.302
GLOBO A120

page.302
BIG

page.303
SUPER ARON

page.303
VERSUS

page.303
KORN

page.304
T8 3CCT 120LM/W 1 SIDE

page.304
T8 TECNIC PRO 130LM/W

page.304
T8 EVO 160LM/W 1 SIDE

page.304
T8 HIGH-LUMEN

page.305
T8 STANDARD 2 SIDES

page.305
T8 STANDARD 1 SIDE

page.305
T5 STANDARD 2 SIDES

306 - 309 LED STRIP 230V

page.308
SLIMSTRIP 230V

page.308
PROSTRIP 230V IP65

page.309
PROJECT STRIP 230V

page.309
COB 230V

310 - 324 LED STRIP 24V


page.311
STANDARD SMD 24V


page.312
PROSTRIP SMD 24V


page.313
SUPER LONG PROSTRIP


page.314
HIGH LUMEN 24V

page.315
FREE CUT SMD 24V

page.316
SLIM SMD 24V


page.316
LARGE SMD 24V

page.317
COB 24V

page.318
COB 24V


page.319
FREE CUT COB 24V

page.319
COB SLIM 24V


page.320
COB LARGE 24V


page.320
SMD CCT CHANGE 24V


page.320
CSP CCT TUNABLE 24V

page.321
PROSTRIP SMD RGB 24V


page.321
COB RGB 24V

page.322
SMD RGBW 24V


page.322
COB PRO RGBW (4000K)


page.323
SMD RGB+CCT 24V


page.324
COB RGB+CCT 24V

325 - 329 SPECIAL LED STRIP 24V


page.326
EXTRA WARM 24V

page.327
ZIGUEZAGUE 24V


page.327
SIDEVIEW 24V


page.327
DIM TO WARM 24V

page.328
SAUNA 24V


page.329
SPI DIGITAL COB/SMD

330 - 336 NEON TUBES

page.331
TUBO NEON 360°

page.331
TUBO NEON 160°


page.332
NEON WALL WASHER


page.332
MODULAR WALL WASHER

page.333
NEON 16X16 24V


page.334
NEON SIDE VIEW 10X18


page.335
NEON SIDE VIEW 10X18


page.335
NEON TOP VIEW 06X06


page.336
NEON SIDE VIEW 03X08

page.336
NEON PISCINA 24V

337 - 338 CONTROLLERS WIRELESS (RF)

page.338
KIT 2 IN 1 SINGLE COLOR

page.338
KIT 3 IN 1

page.338
2 IN 1-1 COLOR/CCT

page.338
3 IN 1

page.338
5 IN 1

page.338
FAST 2 IN 1-1 COLOR/CCT

page.338
FAST 3 IN 1

page. 338
1 COLOR

page. 338
PANEL 1 COLOR

page.338
PANEL CCT

page.338
PANEL 3 IN 1

page.338
DIN 1 COLOR

page.338
MODULE TRIAC+PUSH

page.338
MODULE TRIAC+PUSH

page.338
1 COLOR HIGH VOLTAGE

page.338
CCT HIGH VOLTAGE

page.338
RGB HIGH VOLTAGE

page.338
GATEWAY WIRELESS

339 - 339 CONTROLLERS WIRELESS + WIFI

page.339
2 IN 1-1 COLOR/CCT

page339
5 IN 1

page.339
FAST 2 IN 1-1 COLOR/CCT

page.339
FAST 3 IN 1

page.339
5 IN 1

page. 339
5 IN 1

page.339
5 IN 1

page.339
1 COLOR POWER SUPPLY

page.339
RGB + CCT

page.339
RGBW

page.339
1 COLOR

page.339
CONTROLLER 5 IN 1

page. 339
MODULE TRIAC+PUSH

page.339
MODULE TRIAC+PUSH

339 - 340 CONTROLLERS WIRELESS + ZIGBEE

page.339
2 IN 1-1 COLOR/CCT

page.339
3 IN 1

page.339
5 IN 1

page.339
FAST 2 IN 1

page.339
FAST 3 IN 1

page.340
5 IN 1

page.340
MODULE TRIAC+PUSH

page.340
MODULE TRIAC+PUSH

page.340
GATEWAY ZIGBEE

341 - 341 CONTROLLERS WIRELESS

page.341
REMOTE 1 COLOR

page.341
REMOTE CCT


page.341
REMOTE CCT


page.341
REMOTE 1 COLOR


page.341
REMOTE 1 COLOR/CCT


page.341
REMOTE RGB/RGBW


page.341
PANEL RGB+CCT

page.341
PANEL 1 COLOR 4 ZONES


page.341
PANEL CCT 4 ZONES


page.341
PANEL RGBW 4 ZONES


page.341
PANEL RGBW 4 ZONES


page.341
PANEL RGB+CCT 4 ZONES


page.341
PANEL RGBW 4 ZONES


page.341
PANEL RGB+CCT 8 ZONES


page.341
PANEL 4 ZONES


page.341
CCT (ROTATE) 4 ZONES

page.341
DIMMING & CCT CHANGE

page.341
RGB+CCT 433MHZ

342 - 344 OTHER CONTROLLERS


page.342
PIXEL/SPI RGB/RGBW


page.342
REMOTE PIXEL/SPI RGB


page.342
REMOTE WIRELESS


page.342
CONTROLLER SPI


page.342
REMOTE WIRELESS


page.342
CONTROLLER STAIR


page.342
MODULE 0-10V/1-10V


page.343
REGULATOR PANEL


page.343
PANEL RF&0/1-10V 4


page.343
GATEWAY


page.343
PIR SENSOR (120°)


page.343
5 IN 1


page.343
MODULE DALI&PUSH


page.343
PAINEL REGULADOR


page.343
MODULE DALI&PUSH


page.343
MODULE ESTORES


page.344
CONVERTER 1-10V


page.344
DISJUNTOR WIFI

344 - 344 DALI/DMX


page.344
CONTROLLER MASTER


page.344
CONTROLLER MASTER


page.344
CONTROLLER MASTER


page.344
1 COLOR

page.344
RGB DMX512

page.344
RGBW DMX512

page.344
RGB+CCT

345 - 348 POWER SUPPLY

page.346
POWER SUPPLY 12V

page.346
POWER SUPPLY 24V

page.346
DIMMABLE TRIAC 0-10V

page.346
POWER SUPPLY 24V IP67

page.346
POWER SUPPLY SERIE M

page.347
ARON PRO LINEAR

page.347
ARON PRO

page.347
ARON PRO DALI

page.347
ARON PRO TRIAC

page.348
POWER SUPPLY IP20

page.348
POWER SUPPLY IP67

349 - 353 LED PROFILE

page.350
ALUMINIUM/OPAL

page.350
ALUMINIUM/OPAL

page.350
ALUMINIUM/OPAL

page.350
ALUMINIUM/OPAL

page.350
ALUMINIUM/OPAL

page.350
ALUMINIUM/OPAL

page.350
ALUMINIUM/OPAL

page.350
ALUMINIUM/OPAL

page.350
ALUMINIUM/OPAL

page.350
"U" ALUMINIUM/OPAL

page.351
ALUMINIUM/OPAL

page.351
ALUMINIUM/OPAL

page.351
ALUMINIUM/OPAL

page.351
ALUMINIUM/OPAL

page.3451
ALUMINIUM/OPAL

page.351
ALUMINIUM/OPAL

page.351
ALUMINIUM/OPAL

page.351
ALUMINIUM/OPAL

page.351
"U" ALUMINIUM/OPAL

page.351
ALUMINIUM/OPAL

page.351
ALUMINIUM/OPAL

page.351
ALUMINIUM/OPAL

page.351
ALUMINIUM/OPAL

page.351
ALUMINIUM/OPAL

page.352
ALUMINIUM ROUND

page.352
ALUMINIUM SQUARE

page.352
FLEXIBLE

page.352
TUBE ROUND

page.352
BASEBOARD



INTERIOR

RECESSED

ALL LIGHTING SOLUTIONS


PETI











Voltage	Body Material	Beam Angle	UGR	Dimmable	IP	Mounting Type
220-240V	Aluminium	40°	<15	TRIAC	IP65 Front IP40 Back	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
5W	3CCT 2700K-3000K-4000K	400lm	White	ILAR-02385
			Black	ILAR-02386

BERG TRIMLESS


S


M




Voltage	Body Material	Beam Angle	IP	Mounting Type
200-240V	Aluminium	24°	IP20	Trimless Recessed


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
5W	2700K	425lm	White RAL 9016	ILAR-00172
9W	2700K	765lm	White RAL 9016	ILAR-00173



GABI

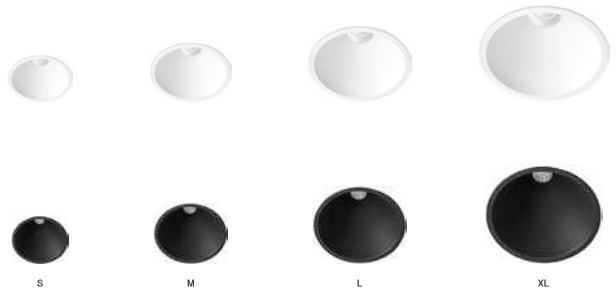

SIZE

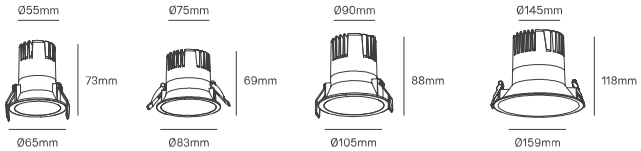

Voltage	Body Material	Beam Angle	IP	Dimmable	Mounting Type
220-240V	Aluminium	38°-60°	IP54 Front IP40 Back	Triac	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Beam Angle	Housing Colour	SKU
5W	3CCT 2700K-3200K-4000K	400lm	Ø65x73mm	Ø55mm	38°	White	ILAR-03699
		300lm			38°	Black	ILAR-03709
10W	3CCT 2700K-3200K-4000K	830lm	Ø83x69mm	Ø75mm	38°	White	ILAR-03722
		757lm			38°	Black	ILAR-03725
		779lm			60°	White	ILAR-03700
		700lm			60°	Black	ILAR-03710
15W	3CCT 2700K-3200K-4000K	1092lm	Ø105x88mm	Ø90mm	38°	White	ILAR-03723
		980lm			38°	Black	ILAR-03726
		1735lm			60°	White	ILAR-03701
		978lm			60°	Black	ILAR-03711
30W	3CCT 2700K-3200K-4000K	2532lm	Ø159x118mm	Ø145mm	38°	White	ILAR-03724
		2091lm			38°	Black	ILAR-03727
		2520lm			60°	White	ILAR-03702
		2283lm			60°	Black	ILAR-03712



BEN





Base
ILAR-02396

\+



Lenses
15° - ILAR-02637
24° - ILAR-02397
36° - ILAR-02398
60° - ILAR-02399

\+



White
ILAR-02400
Black
ILAR-02401




Trimless - White
ILAR-02714



Honeycomb/Black
ILAR-02404



KIT IP65
ILAR-02638
(Not rotable
after installation)




Voltage	Body Material	Beam Angle	UGR	Dimmable	IP	Mounting Type	Rotable
220-240V	Aluminium	15°	<19	TRIAC	IP20	Recessed	Yes

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour
10W	3CCT 2700K- 3000K-4000K	850lm	Black

LUKE





Voltage	Body Material	Beam Angle	UGR	Dimmable	IP	Mounting Type
220-240V	Aluminium	40°	<19	TRIAC	IP65 Front IP40 Back	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	SKU
10W	3CCT 2700K- 3000K-4000K	850lm	ILAR-02405

Mandatory Options (Not included)



Black/Black
ILAR-02406



Black/White
ILAR-02407



Black/Grey
ILAR-02408



Black/Golden
ILAR-02409



White/White
ILAR-02410



White/Black
ILAR-02411



White/Grey
ILAR-02412



White/Golden
ILAR-02413



TORQ




FIXED





ROTABLE



DEEP








Voltage	Body Material	Beam Angle	UGR	IP	Dimmable	Mounting Type
220-240V	Aluminium	60°	<22	IP65 Front IP40 Back	Triac	Recessed

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Housing Colour	SKU
Fixed	8W	3CCT 2700K-	700lm	Ø80x40mm	Ø68mm	White RAL 9016	ILAR-03677
Rotable	8W	3000K-4000K	700lm	Ø80x40mm	Ø68mm	White RAL 9016	ILAR-03676
Deep	8W		700lm	Ø80x55mm	Ø68mm	White RAL 9016	ILAR-03678



MODULE EYE ZOOM





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	18°-26°-36°-50°	IP20	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
Switch 4W-6W-8W	3CCT 2700K-3000K-4000K	750lm	White	ILAR-02964
Switch 7W-9W-11W	3CCT 2700K-3000K-4000K	900lm	White	ILAR-02837

*Compatible with all GU10 Fitting

Options (Not included)

Circular Ring
White
ILAR-03048

Square Ring
White
ILAR-03049



Honeycomb Circular
White
ILAR-03050




Spring Kit

ILAR-03051



JACK





Voltage	Body Material	Beam Angle	Dimmable	IP	Mounting Type
220-240V	Aluminium	60°	TRIAC	IP65 Front IP40 Back	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
6W	2CCT 3000K-4000K	680lm	Black	ILAR-02419


Mandatory Options (Not included)



Black	Chrome	Brushed Steel	White	Black	Chrome	Brushed Steel	White
ILAR-02420	ILAR-02421	ILAR-02422	ILAR-02423	ILAR-02424	ILAR-02425	ILAR-02426	ILAR-02427

ROB





Voltage	Body Material	Beam Angle	Dimmable	IP	Mounting Type	Rotable
220-240V	Aluminium	60°	TRIAC	IP65 Front IP40 Back	Recessed	Yes

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
7W	2CCT 3000K- 4000K	675lm	Black	ILAR-02387


Mandatory Options (Not included)



Brushed Steel	White	Black	Chrome	Brushed Steel	White	Black	Chrome
ILAR-02388	ILAR-02389	ILAR-02390	ILAR-02391	ILAR-02392	ILAR-02393	ILAR-02394	ILAR-02395

MATT





Voltage	Body Material	Beam Angle	Dimmable	IP	Mounting Type	Rotable
220-240V	Aluminium	360°	TRIAC	IP65 Front IP40 Back	Recessed	Yes

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
6W	4CCT 2700K-3000K-4000K-6000K	680lm	Black	ILAR-02414

Options (Not included)




Black	White	Brushed Steel	Chrome
ILAR-02415	ILAR-02416	ILAR-02417	ILAR-02418



GLAZ








Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Die Cast Aluminium	25°	IP67	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
4.6W	3000K	446lm	Black	ILAR-02239
			White	ILAR-02240


ETAN






Voltage	Body Material	Beam Angle	IP	Mounting Type	Rotable
220-240V	Aluminium+PC	38°	IP40	Recessed	Yes

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
20W	2700K	1600lm	White RAL 9016	ILAR-01945
	4000K	1600lm	White RAL 9016	ILAR-01578

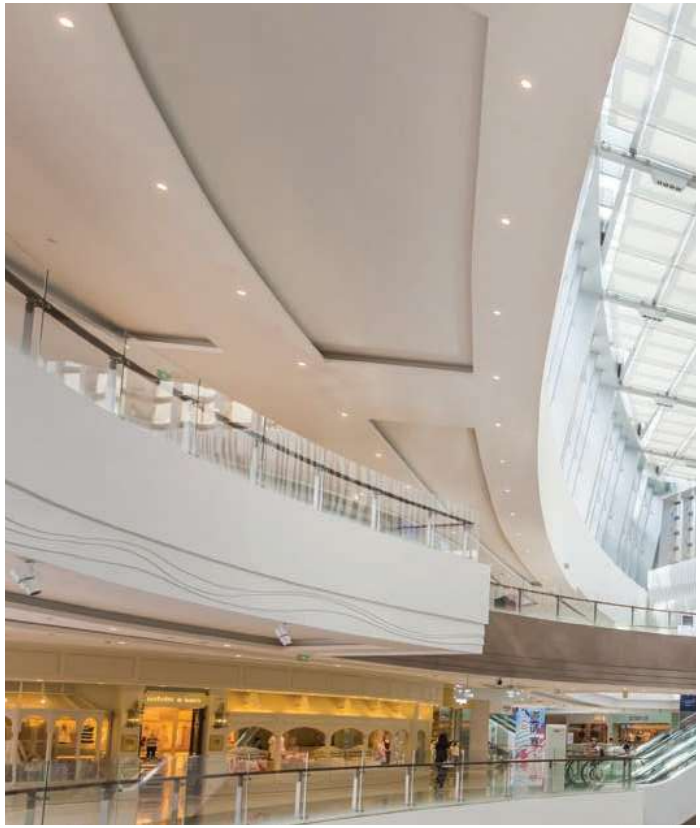

ECO SPOTLIGHT






Voltage	Body Material	Beam Angle	IP	Mounting Type	Rotable
220-240V	PVC	38°	IP44 Front IP20 Back	Recessed	Yes

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
7W	3000K	650lm	White	ILAR-00556
	4000K	670lm	White	ILAR-00557
	6500K	700lm	White	ILAR-00558

LUSO




Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	60°	IP65 Front IP20 Back	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
8W	2700K	815lm	White RAL 9016	ILAR-01108

ONE






Voltage	Body Material	Beam Angle	IP	Mounting Type	Rotable
220-240V	Aluminium	60°	IP65 Front IP20 Back	Recessed	Yes

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
8W	3000K	815lm	White RAL 9016	ILAR-01027

DOWNLIGHTS


VAUN






HALE





ACE






Voltage	Body Material	Beam Angle	IP	Mounting Type	Rotable
220-240V	Aluminium	36°	IP40 Front IP20 Back	Recessed	Yes

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
VAUN	10W	2700K	870lm	White RAL 9016	ILAR-00656
		4000K	950lm		ILAR-00657
HALE	10W	2700K	850lm		ILAR-00659
		4000K	850lm		ILAR-00660
ACE	10W	2700K	870lm		ILAR-00662
		4000K	950lm		ILAR-00663

LOKI





Voltage	Body Material	Beam Angle	IP	Mounting Type
200-240V	Aluminium+PC	60°	IP54 Front IP20 Back	Recessed


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
8W	2700K	750lm	White RAL 9016	ILAR-00994
	4000K	800lm	White RAL 9016	ILAR-00995

UNA II ROUND / SQUARE




SIZE

Round



Square




Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium+PC	90°	IP65 Front Round / IP40 Back IP44 Front Square / IP40 Back	Recessed

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Dimmable	Housing Colour	SKU
Round	25W	3CCT 3000K-4000K-5700K	2900-3200lm	TRIAC	White RAL 9016	ILAR-00708
Round	10W	3CCT 3000K- 4000K-5000K	1050lm	NO		ILAR-01570
Round	15W		1650lm	NO		ILAR-01571
Round	18W		2160lm	NO		ILAR-01572
Round	25W		3000lm	NO		ILAR-01573
Square	10W	3CCT 3000K- 4000K-5000K	1200lm	NO		ILAR-03065
Square	20W		2400lm	NO		ILAR-03066
Square	36W		4320lm	NO		ILAR-03067

FLEXI II





Voltage	Body Material	Beam Angle	UGR	IP	Mounting Type
220-240V	Aluminium+PC	120°	<19	IP54 Front IP40 Back	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Housing Colour	SKU
7W	3CCT 3000K-	840lm	Ø110x25mm	Ø75-95mm	White RAL 9016	ILAR-02243
12W	4000K-5700K	1620lm	Ø145x30mm	Ø120-135mm		ILAR-02244
18W		2520lm	Ø195x39mm	Ø165-185mm		ILAR-02245
24W		3360lm	Ø230x39mm	Ø205-220mm		ILAR-02246

Options (Not included)



Surface KIT - D110
Ø114x70mm
ILAR-02346


Surface KIT - D145
Ø149x75mm
ILAR-02347

Surface KIT - D195
Ø199x75mm
ILAR-02348

STRIX



SIZE



Voltage	Body Material	Beam Angle	UGR	IP	Mounting Type
220-240V	ADC12+PC+PMMA	55°	<16	IP65 Front IP40 Back	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Housing Colour	SKU
12W	3CCT 3000K-	1440lm	Ø110x50mm	Ø95mm	White	ILAR-02352
20W	4000K-5700K	2400lm	Ø140x57mm	Ø125mm		ILAR-02353
24W		2880lm	Ø165x60mm	Ø150mm		ILAR-02354
36W		4320lm	Ø220x66.5mm	Ø200mm		ILAR-02355

Options (Not included)



Black Ring
D110 - ILAR-02356
D140 - ILAR-02359
D165 - ILAR-02362
D220 - ILAR-02365

Chrome Ring
D110 - ILAR-02357
D140 - ILAR-02360
D165 - ILAR-02363
D220 - ILAR-02366

Golden Ring
D110 - ILAR-02358
D140 - ILAR-02361
D165 - ILAR-02364
D220 - ILAR-02367

VESTA

2 BASE MODULES, 1 SIZE



2 BASES
15W/20W | 26W/35W
Ø116mm

DIFFERENT REFLECTOR SIZES



Ø190 **Ø230** **Ø285** **Ø305**

ONE PRODUCT



BASE SIZE



Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	90°	IP54 Front IP40 Back	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
15/20W	3CCT 3000K-4000K-5700K	Max. 2400lm	Ø116mm	White RAL 9016	ILAR-03599
26/35W		Max. 4200lm	Ø116mm		ILAR-03600

Mandatory Options (Not included)



Reflector D190x51mm
Cut-out: 165-175mm
ILAR-03601

Reflector D230x56mm
Cut-out: 200-215mm
ILAR-03602

Reflector D285x60mm
Cut-out: 245-270mm
ILAR-03603


Reflector D305x69mm
Cut-out: 270-290mm
ILAR-03604

BRIL



S **M** **L** **XL**

SIZE



Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminum	60°	IP54 Front IP40 Back	Recessed


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Housing Colour	SKU
10W	3000K	1150lm	Ø110x53mm	Ø90-95mm	White RAL 9016	ILAR-02210
	4000K	1250lm				ILAR-02211
18W	3000K	2150lm	Ø145x65mm	Ø120-130mm		ILAR-02212
	4000K	2250lm				ILAR-02213
25W	3000K	3025lm	Ø190x75mm	Ø160-170mm		ILAR-02214
	4000K	3125lm				ILAR-02215
30W	3000K	3800lm	Ø225x87mm	Ø200-210mm		ILAR-02216
	4000K	3900lm				ILAR-02217
42W	4000K	4620lm	Ø225x87mm	Ø200-210mm		ILAR-01843

QUANT




ONE






DOUBLE





TRIPLE






Voltage	Body Material	Beam Angle	IP	Mounting Type	Rotable
220-240V	Aluminium	36°	IP20	Recessed	Yes / 360°

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
ONE	30W	3CCT 3000K-4000K-5000K	3000lm	White	ILAR-02750
				Black	ILAR-02751
DOUBLE	60W	3CCT 3000K-4000K-5000K	6200lm	White	ILAR-02748
				Black	ILAR-02749
TRIPLE	90W	3CCT 3000K-4000K-5000K	9270lm	White	ILAR-02752
				Black	ILAR-02753

RITZ






Voltage	Body Material	Beam Angle	IP	Mounting Type	Rotable
220-240V	Aluminium	36°	IP20	Recessed	Yes

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
35W	3CCT 3000K-4000K-5000K	2812lm	White	ILAR-03034
			Black	ILAR-03035

CHIADO






Voltage	Body Material	Beam Angle	IP	Mounting Type	Rotable
220-240V	Aluminium	100°	IP65 Front IP20 Back	Recessed	Yes

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Housing Colour	SKU
32W	3CCT 3000K-4000K-5700K	3085lm	235x145x116.5mm	220x123mm	White	ILAR-02597

JAZ







Voltage	Body Material	Beam Angle	IP	Mounting Type
100-277V	Aluminum+PC	90°	IP54 Front IP20 Back	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Housing Colour	SKU
18W	4000K	2350lm	Ø190x37mm	Ø160mm	White RAL 9016	ILAR-00690
			190x190x40mm	Ø160mm		ILAR-00684
25W	4000K	3650lm	Ø228x37mm	Ø200mm		ILAR-00693
			228x228x40mm	Ø200mm		ILAR-00687

DIMMABLE DRIVERS FOR DOWNLIGHTS

		IP	SKU
	Driver for LED Panel 10W Dimmable Triac	IP20	ILAR-01013
	Driver for LED Panel 15-18W Dimmable Triac	IP20	ILAR-01014
	Driver Dimmable Triac 12W 9-42V Adjustable Current	IP20	ILAR-02538
	Driver Dimmable Triac 20W 9-42V Adjustable Current	IP20	ILAR-02539
	Driver Dimmable Triac 30W 9-42V Adjustable Current	IP20	ILAR-02540
	Driver Dimmable Triac 40W 9-42V Adjustable Current	IP20	ILAR-02541
	Driver Dimmable 20W DALI + Push+1-10V 3-36V	IP20	ILAR-02952
	Driver Dimmable 20W DALI + Push+1-10V 6-52V	IP20	ILAR-02953
	Driver DALI&Push Dimm 30W DALI (250mA-1A)	IP20	ILAR-02164
	Driver Dimmable DALI + Push 12W 9-42V Adjustable Current	IP20	ILAR-02719
	Driver Dimmable DALI + Push 20W 9-42V Adjustable Current	IP20	ILAR-02718
	Driver Dimmable DALI + Push 30W 9-42V Adjustable Current	IP20	ILAR-02717
	Driver Dimmable DALI + Push 40W 9-42V Adjustable Current	IP20	ILAR-02885
	Driver Meanwell LCM-25DA2 DALI 2 e PUSH-DIM 350-1050mA	IP20	ILDV-00044
	Driver Meanwell LCM-25 Corrente Ajustável 350-1050mA 0/1-10V	IP20	ILDV-01139
	Driver Meanwell LCM-40DA2 DALI2 e PUSH-DIM 350-1050mA	IP20	ILDV-00045


DIMMABLE MODULE

		IP	SKU
	Module Triac + Push Dimm + Wireless 300W TRI-C1	IP20	ILAR-01447
	Module Triac + Push Dimm + Wireless 500W TRI-PR	IP20	ILAR-02608
	Module Triac+Push Dimm + Wireless + WiFi 300W TRI-C1WR	IP20	ILAR-01993
	Module Triac + Push Dimm + Wireless + WiFi 500W TRI-PW	IP20	ILAR-02609
	Module Triac + Push Dimm + Wireless + ZigBee 300W TRI-C1Z	IP20	ILAR-01615
	Module Triac + Push Dimm + Wireless + ZigBee 500W TRI-PZ	IP20	ILAR-02610
	Module DALI+ Push Dimm DBUS100mA	IP20	ILAR-03010
	Module 0-10V/1-10V RF + Push Dimmer	IP20	ILAR-01900
	Module 0-10V/1-10V WiFi + RF + Push Dimmer	IP20	ILAR-01901
	Module 0-10V/1-10V 2 Channels / WiFi + RF + Push Dimmer	IP20	ILAR-02021
	Regulator Panel RF & 0/1-10V (230V)	IP20	ILAR-01904
	Regulator Panel RF & 0/1-10V 4 Zones (230V)	IP20	ILAR-01905
	Regulator Panel Triac & RF 230V-200W	IP20	ILAR-03013
	Regulator Panel WiFi + RF & Triac 230V-360W	IP20	ILAR-03014

LED PANEL








Voltage	Body Material	Beam Angle	PF	IP	Mounting Type
176-264V	Aluminium	120°	>0.5 >0.7	IP44	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Housing Colour	SKU
Recessed Round Panel						
3W	3CCT 3000K-	275lm	Ø87x18mm	Ø70mm	White	ILAR-02806
5W	4000K-6500K	475lm	Ø87x18mm	Ø70mm		ILAR-02912
6W		510lm	Ø123x18mm	Ø108mm		ILAR-02807
9W		720lm	Ø145x18mm	Ø130mm		ILAR-02808
12W		1070lm	Ø173x18mm	Ø150mm		ILAR-02809
18W		1630lm	Ø223x18mm	Ø206mm		ILAR-02810
24W		2160lm	Ø298x18mm	Ø275mm		ILAR-02811
30W		2700lm	Ø298x18mm	Ø275mm		ILAR-02913
Recessed Square Panel						
3W	3CCT 3000K-	275lm	87x87x18mm	70x70mm	White	ILAR-02909
6W	4000K-6500K	510lm	123x123x18mm	108x108mm		ILAR-02812
9W		720lm	145x145x18mm	130x130mm		ILAR-02911
12W		1070lm	173x173x18mm	150x150mm		ILAR-02813
18W		1630lm	223x223x18mm	206x206mm		ILAR-03016
24W		2160lm	298x298x18mm	275x275mm		ILAR-02910
Surface Round Panel						
12W	3CCT 3000K-	1070lm	Ø170x35mm		White	ILAR-02029
18W	4000K-6500K	1630lm	Ø225x35mm			ILAR-01943
24W		2160lm	Ø300x35mm			ILAR-01944
Surface Square Panel						
12W	3CCT 3000K-	1070lm	170x170x35mm		White	ILAR-01752
18W	4000K-6500K	1630lm	225x225x35mm			ILAR-02338
24W		2160lm	300x300x35mm			ILAR-02030

LED PANEL BACKLIT






Voltage	Body Material	Beam Angle	PF	IP	Mounting Type
180-265V	Aluminium	120°	>0.5	IP44	Recessed


Power	Colour Temperature (CCT)	Total Luminous Flux (±10%)	Size	Cut-out	Housing Colour	SKU
6W	3CCT 3000K-	480lm	Ø93x26.5mm	Ø69-79mm	White	ILAR-03620
9W	4000K-6500K	720lm	Ø121x26.5mm	Ø95-105mm		ILAR-03621
18W		1440lm	Ø177x26.5mm	Ø145-155mm		ILAR-03622
24W		1920lm	Ø225x26.5mm	Ø187-197mm		ILAR-03623

BACKLIT

LED PANEL


	**600X600**		**40W**	**100LM/W**
			40W	**140LM/W**
			35W	**150LM/W**
			24W	**160LM/W**
			30W	**125LM/W**
	**1200X300**		**40W**	**140LM/W**
			36W	**150LM/W**

LED LUMINAIRE

	**625X625**	**BOARD SURFACE**	**35W**	**140LM/W**
	**1225X325**	**BOARD SURFACE**	**35W**	**140LM/W**
	**1525X325**	**BOARD SURFACE**	**43W**	**145LM/W**

ALL LIGHTING SOLUTIONS

BACKLIT 600X600




Voltage	Body Material	Housing Colour	Mounting Type
220-240V	Aluminium	White	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	IP	UGR	Beam Angle	Height	SKU
100LM/W							
40W	3CCT 3000K- 4000K-6500K	4000lm	IP44 Front IP40 Back	<19	90°	32mm	ILAR-03611
				<21	120°	32mm	ILAR-03597
140LM/W							
40W	3CCT 3000K-4000K-6500K	5600lm	IP44	<19	90°	32mm	ILAR-02914
150LM/W							
35W	3CCT 3000K-4000K-6000K	5250lm	IP65	<19	90°	35mm	ILAR-02160
160LM/W							
24W	3CCT 3000K-4000K-6500K	3840lm	IP44	<21	120°	32mm	ILAR-01908
				<19	90°	32mm	ILAR-01909

Recommended Accessories

Surface Kit	ILAR-01910
Recessed Kit	ILAR-00333
Set of 4 Springs for Panel	ILAR-00334

LYSS PRO 600X600



Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	90°	IP40	Recessed


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
30W	3CCT 3000K-4000K-5700K	3830lm	White	ILAR-03063

Recommended Accessories

Surface Kit	ILAR-01910
Recessed Kit	ILAR-00333

BACKLIT 1200X300 140LM/W





Voltage	Body Material	Beam Angle	Housing Colour	Mounting Type
220-240V	Aluminium	90°	White	Recessed


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	IP	UGR	SKU
40W	3CCT 3000K-4000K-6500K	5600lm	IP44 Front IP40 Back	<19	ILAR-02979
35W	3CCT 3000K-4000K-6500K	5250lm	IP65	<19	ILAR-02161

Recommended Accessories

Recessed Kit	ILAR-00508
Surface Kit with Screws	ILAR-02166
Surface Kit without Screws	ILAR-02091




BOARD SURFACE

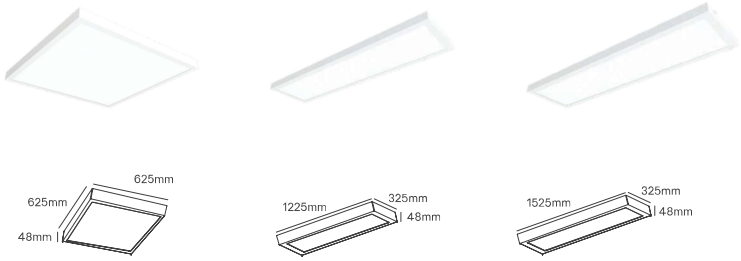

Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	90°	IP40	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	UGR	Housing Colour	SKU
625X625 140LM/W					
23W/29W/35W/40W	3CCT 3000K-3500K-4000K	5600lm	<19	White	ILAR-03671
1225X325 140LM/W					
20W/25W/30W/35W	3CCT 3000K-3500K-4000K	4900lm	<19	White	ILAR-03670
1520X325 145LM/W					
25W/30W/35W/43W	3CCT 3000K-3500K-4000K	6200lm	<19	White	ILAR-02945

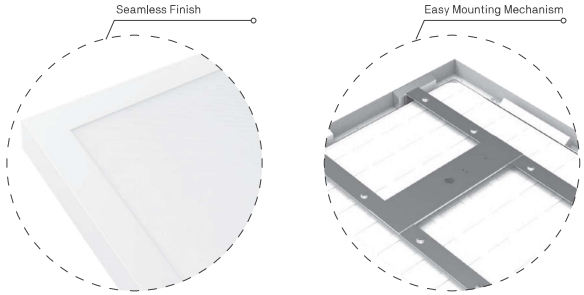


EDGELIT

LED PANEL

600X600	PRO	40W	100LM/W
	HIGH LUMEN PRO	40W	130LM/W
600X300	PRO	22W	110LM/W
1200X300	PRO	40W	100LM/W
1500X300	PRO	40W	120LM/W
1200X600	PRO	60W	150LM/W

ALL LIGHTING SOLUTIONS

EDGELIT PRO 600X600




Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	90° / 120°	IP40	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	Beam Angle	UGR	SKU
PRO 100LM/W						
40W	4000K	3600lm	White	90°	<19	ILAR-00802
	6000K			90°	<19	ILAR-00803
	4000K			120°	<21	ILAR-00330
	6000K			120°	<21	ILAR-00331
HIGH LUMEN PRO 130LM/W						
40W	4000K	5200lm	White	120°	<21	ILAR-01125

Options (Not included)	
Surface Kit	ILAR-00332
Recessed Kit	ILAR-00333
Suspension Kit	ILAR-00511
Set of 4 Springs for Panel	ILAR-00334

EDGELIT PRO 600X300






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	120°	IP40	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
22W	4000K	2420lm	White	ILAR-01774

Options (Not included)	
Surface Kit	ILDV-00032
Recessed Kit	ILAR-03044

EDGELIT PRO 1200X300






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	120°	IP40	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
40W	4000K	3600lm	White	ILAR-00506
	6000K			ILAR-00507

Options (Not included)	
Surface Kit	ILAR-00509
Recessed Kit	ILAR-00508
Suspension Kit	ILAR-00510

EDGELIT PRO 1500X300






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	110°	IP40	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
40W	4000K	4500lm	White	ILAR-01110

Options (Not included)	
Surface Kit	ILAR-01111
Recessed Kit	ILAR-01112
Set of 4 Springs for Panel	ILAR-00990

EDGELIT PRO 1200X600





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	120°	IP44	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
60W	4000K	6000lm	White	ILAR-01124


Options (Not included)	
Recessed Kit	ILAR-01556
Surface Kit	ILAR-01555
Set of 4 Springs for Panel	ILAR-00990

ACCESSORIES FOR PANELS

		SKU
	Driver Dimmable Triac 3-9W 15-30 VDC/150-380MA Driver Dimmable Triac 7-12W 24-42VDC/150-320MA Driver Dimmable Triac 10-18W 30-63VDC/150-450MA Driver Dimmable 40W	ILDV-00013 ILDV-00014 ILDV-00015 ILAR-00496
	Driver for LED Panel 3,5-25W DALI&Push Dimm DIM 0-10V Multicurrent 250-600mA	ILAR-00925
	Driver for LED Panel 9,1-46W DALI&Push Dimm DIM 0-10V Multicurrent 650-1100mA	ILAR-00926
	Driver DALI&Push Dimm 30W DALI (250mA-1A)	ILAR-02164
	Driver Dimmable Triac 30W 9-42V Adjustable Current	ILAR-02540
	Driver Dimmable Triac 40W 9-42V Adjustable Current	ILAR-02541
	Driver Dimmable DALI+Push 30W 9-42V Adjustable Current	ILAR-02717
	Driver Dimmable DALI+Push 40W 9-42V Adjustable Current	ILAR-02885
	Driver Meanwell LCM-25DA2 DALI2 e PUSH-DIM 350-1050mA	ILDV-00044
	Driver Meanwell LCM-25 Corrente Ajustável 350-1050mA 0/1-10V	ILDV-01139
	Driver Meanwell LCM-40DA2 DALI2 e PUSH-DIM 350-1050mA	ILDV-00045
	Safety Steel Cable for Panel	ILAR-02803
	Quick Connection Box for Driver	ILAR-02804
	Emergency Kit for LED Panel and Downlights 20-55V Emergency Kit for LED Panel and Downlights 60-300V	ILEM-00062 ILEM-00063

ACCESSORIES FOR PANELS

		SKU
	Module Triac + Push Dimm + Wireless 300W TRI-C1	ILAR-01447
	Module Triac + Push Dimm + Wireless 500W TRI-PR	ILAR-02608
	Module Triac + Push Dimm + Wireless + WiFi 300W TRI-C1WR	ILAR-01993
	Module Triac + Push Dimm + Wireless + WiFi 500W TRI-PW	ILAR-02609
	Module Triac + Push Dimm + Wireless + ZigBee 300W TRI-C1Z	ILAR-01615
	Module Triac + Push Dimm + Wireless + ZigBee 500W TRI-PZ	ILAR-02610
	Module DALI + Push Dimm DBUS100mA	ILAR-03010
	Module 0-10V/1-10V RF + Push Dimmer	ILAR-01900
	Module 0-10V/1-10V WiFi + RF + Push Dimmer	ILAR-01901
	Module 0-10V/1-10V 2 is / WiFi + RF + Push Dimmer	ILAR-02021
	Regulator Panel RF & 0/1-10V (230V)	ILAR-01904
	Regulator Panel RF & 0/1-10V 4 Zonas (230V)	ILAR-01905
	Regulator Panel Triac & RF 230V-200W	ILAR-03013
	Regulator Panel WiFi + RF & Triac 230V-360W	ILAR-03014
	Set of 4 Springs for Panel	ILAR-00334

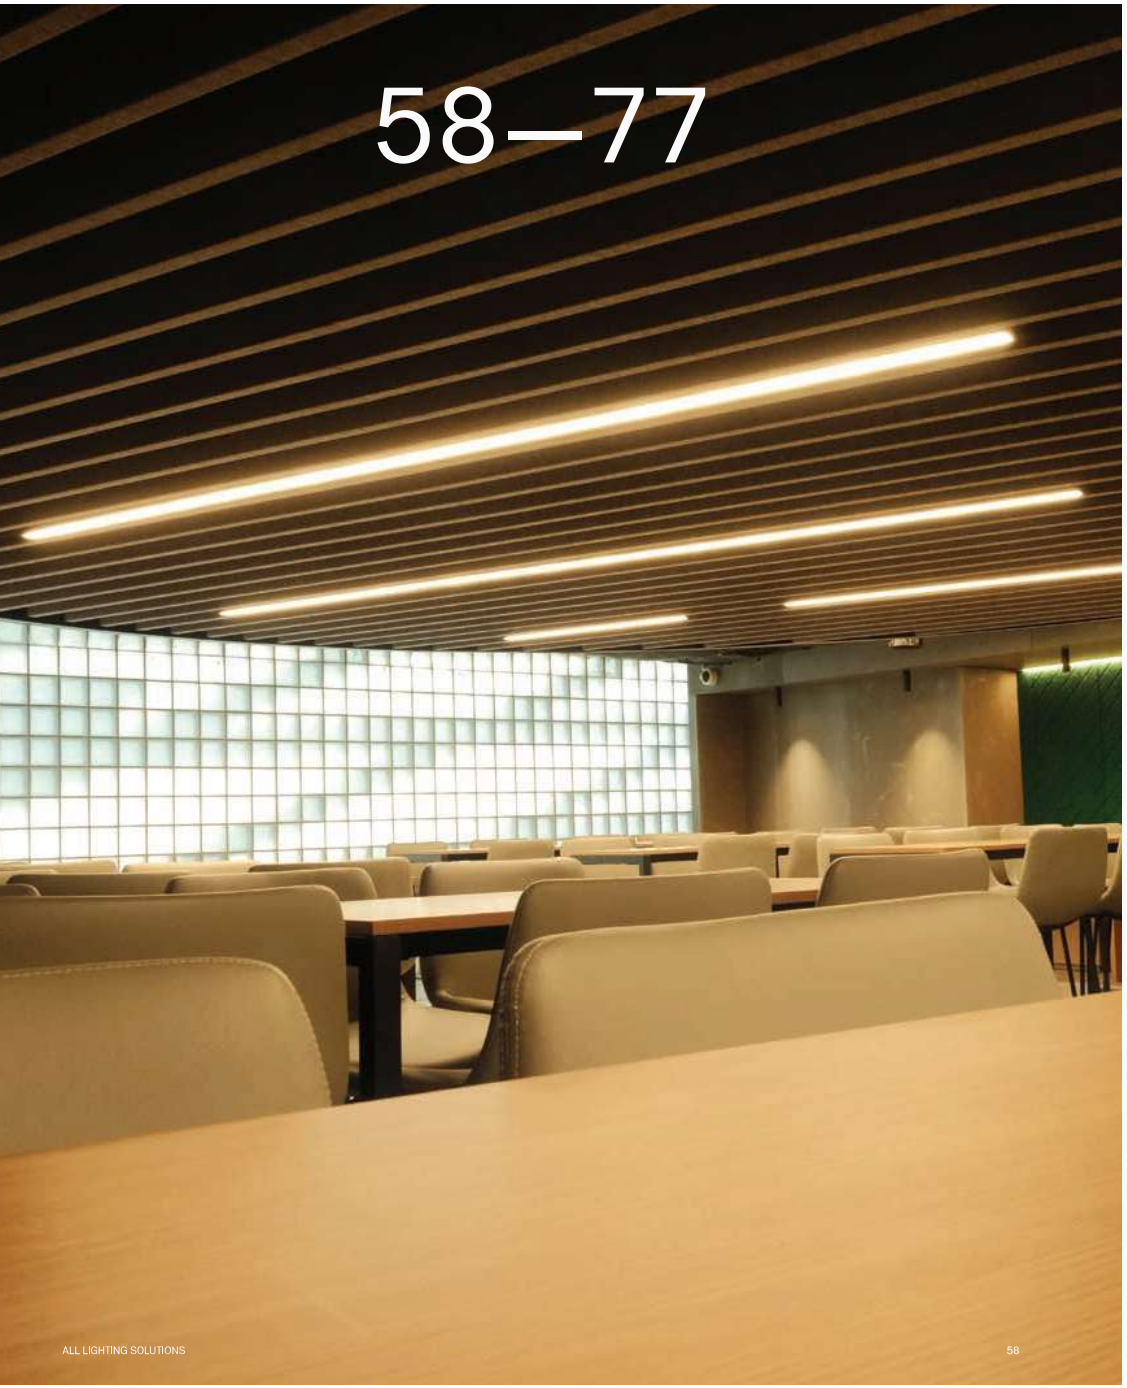


INTERIOR


LINEAR LIGHT AND SUSPENSION

LYNX LINEAR RECESSED









Voltage	Body Material	Beam Angle	IP	Mounting Type
200-240V	Aluminium	110°	IP40	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Housing Colour	SKU
15W	3CCT 3000K-	1400-1600lm	615x62x29mm	607x54mm	White RAL 9016	ILAR-01583
30W	4000K-5700K	3100-3400lm	1208x62x29mm	1201x54mm		ILAR-01584
37W		3820-4190lm	1505x62x29mm	1499x54mm		ILAR-02921

Options (Not included)



X Conector
ILAR-01585



T Conector
ILAR-01586



L Conector
ILAR-01587


Corner Conector Out
ILAR-01588




Corner Conector In
ILAR-01589

SCHOOL WALL WASH








Voltage	Body Material	Beam Angle	Mounting Type
200-240V	Aluminium	Asymmetrical (36°x20°)	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
15W	3CCT 3000K-	1250-1450lm	White RAL 9016	ILAR-01593
30W	4000K-5700K	2900-3300lm	White RAL 9016	ILAR-01594



LINEAR MODULAR LIGHT





Voltage	Body Material	Beam Angle	IP	Mounting Type
170-265V	Aluminium+PC	120°	IP20	Surface/Suspended

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
20W	3CCT 3000K-	2400lm	600x54x58mm		ILAR-02111
40W	4000K-6000K	4800lm	1200x54x58mm		ILAR-02112

Options (Not included)



X Conector
ILAR-02115



T Conector
ILAR-02114



L Conector
ILAR-02113



L Conector 120°
ILAR-02844



Y Conector
ILAR-02845



Power Cable
1,5M
ILAR-01814



Connect
Cable 2M
ILAR-01815



Suspension Kit
ILAR-01810



Recessed Kit
ILAR-01811




Surface Kit
ILAR-01812



LYNX LINEAR





Voltage	Body Material	Beam Angle	IP	Mounting Type
200-240V	Aluminium	100°	IP20	Surface Mounted/Suspended

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
20W - Opal	3CCT 3000K-	2200-2400lm	White RAL 9016	ILAR-01664
	4000K-5700K		Black RAL 9005	ILAR-01663
40W - Opal		4400-4800lm	White RAL 9016	ILAR-00767
			Black RAL 9005	ILAR-01004
40W - Reflector		4800-5200lm	White RAL 9016	ILAR-01025
			Black RAL 9005	ILAR-01036

Options (Not included)



Suspension KIT
ILAR-00771



Connector
ILAR-00772




Dimmable Driver 1-10V
ILAR-01015



LYNX EVO







Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	120°	IP20	Pendant/Surface/Trimless

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	COLOR	SKU
18W	3CCT 3000K-4000K-5700K	2250lm	600x55x75mm	White RAL 9016	ILAR-02251
				Black RAL 9005	ILAR-02252
36W		4500lm	1200x55x75mm	White RAL 9016	ILAR-02249
				Black RAL 9005	ILAR-02250
45W		5625lm	1500x55x75mm	White RAL 9016	ILAR-02247
				Black RAL 9005	ILAR-02248

Options (Not included)



L Connector
8W Opal
White: ILAR-02253
Black: ILAR-02254



120° L Connector
8W Opal
White: ILAR-02255
Black: ILAR-02256



T Connector
10W Opal
White: ILAR-02257
Black: ILAR-02258



120° Y Connector
10W Opal
White: ILAR-02259
Black: ILAR-02260



X Connector
12W Opal
White: ILAR-02261
Black: ILAR-02262



1500mm
Trimless KIT
ILAR-02263



1200mm
Trimless KIT
ILAR-02264



600mm
Trimless KIT
ILAR-02265



Suspension
KIT 2,5m
ILAR-02266




Connection/
Suspension Plate
ILAR-02267

LYNX SLIM







Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	80°	IP20	Suspended

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
15W	2CCT 3000K-4000K	1150-1650lm	605x34x105mm	White RAL 9016	ILAR-03688
			605x34x105mm	Black RAL 9005	ILAR-03689
30W	2CCT 3000K-4000K	2550-3300lm	1205x34x105mm	White RAL 9016	ILAR-03686
			1205x34x105mm	Black RAL 9005	ILAR-03687

Options (Not included)



8W Uplight Module
ILAR-03690




3W Uplight Module
ILAR-03691




Honeycomb
ILAR-03692

SLASH







Voltage	Body Material	Beam Angle	IP	Mounting Type
200-240V	Aluminium	90°	IP20	Suspended

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
30W	3000K	940lm	Silver	ILAR-02235
			Copper	ILAR-02236

TRACE





Voltage	Body Material	Beam Angle	IP	Mounting Type
200-240V	Aluminium	90°	IP20	Suspended


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
18W	3000K	920lm	Matt Black	ILAR-02232



THANE







Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	120°	IP40	Recessed/Suspended

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
35W	4000K	2900lm	White RAL 9016	ILAR-00711

Options (Not included)




Suspension Kit
ILAR-00713

AURA CIRCULAR







Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	90°	IP42	Suspended

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour (White on request)	SKU
50W	2CCT 3000K- 4000K	2750lm - 2900lm	Ø800x35x35mm	Black RAL 9005	ILAR-02222
72W		4000lm - 4200lm	Ø1200x35x35mm	Black RAL 9005	ILAR-02223
90W		5000lm - 5200lm	Ø1500x35x35mm	Black RAL 9005	ILAR-02224

Light Emission Type (On Request)



OUTER INNER UP

VISTA





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	90°	IP20	Suspended

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
30W	3000K	1410lm	Matt Black	ILAR-02226
50W		2350lm		ILAR-02225



LUNA





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	360°	IP20	Suspended

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
46W	2CCT 3000K-4000K	5500-5900lm	Ø800x60mm	Black RAL 9005	ILAR-03679
60W	2CCT 3000K-4000K	6800-7500lm	Ø1000x60mm	Black RAL 9005	ILAR-03680

Options (Not included)



Acoustic Panel - 0,8m
ILAR-03681




Acoustic Panel - 1m
ILAR-03682



OFFICE PRO V2





Voltage	Body Material	Beam Angle	IP	Mounting Type
200-240V	Aluminium	120°	IP40	Surface/Suspended

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
40W	2CCT 3000K-4000K	4450-4800lm	Ø400x86x55x219mm	Black RAL 9005	ILAR-03695
60W		7400-7900lm	Ø600x86x55x383mm		ILAR-03696
75W		9930-10500lm	Ø800x86x55x383mm		ILAR-03697
100W		11600-12600lm	Ø1000x86x55x383mm		ILAR-03698
40W	2CCT 3000K-4000K	4450-4800lm	Ø400x86x55x219mm	White RAL 9016	ILAR-03703
60W		7400-7900lm	Ø600x86x55x383mm		ILAR-03704
75W		9930-10500lm	Ø800x86x55x383mm		ILAR-03705
100W		11600-12600lm	Ø1000x86x55x383mm		ILAR-03706

Options (Not included)




Suspension Kit - Black
ILAR-02048



FIZI






Voltage	Body Material	Beam Angle	IP	Dimmable	Mounting Type
200-240V	PC+Aluminium	360°	IP40	1-10V	Suspended

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
30W	4000K	3900lm	900mm	White End Cap	ILAR-02150
			1200mm	Black End Cap	ILAR-02151



PASCAL





Voltage	Body Material	Beam Angle	IP	Mounting Type
200-240V	Aluminium	36°	IP20	Suspended

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
18W	2700K	1650lm	White RAL 9016	ILAR-00701
			Black RAL 9005	ILAR-00704
	4000K	1750lm	White RAL 9016	ILAR-00702
			Black RAL 9005	ILAR-00705



PASCAL GU10





Voltage	Body Material	IP	Mounting Type
100-240V	Aluminium	IP20	Suspended

Power	Type Of Bulb	Size	Housing Colour	SKU
MAX 7W	1x GU10	300mm	Black	ILAR-03740
		300mm	White	ILAR-03741
	1x GU10	400mm	Black	ILAR-03742
		400mm	White	ILAR-03743
	1x GU10	500mm	Black	ILAR-03744
		500mm	White	ILAR-03745

*Lamps not included.

LUNO




Voltage	Body Material	IP	Mounting Type
100-240V	Aluminium	IP20	Suspended

Power	Type Of Bulb	Size	Housing Colour	SKU
MAX 35W	1x E27	Ø400mm	Black-White	ILAR-03754
	1x E27	Ø400mm	White-White	ILAR-03753

*Lamps not included.



VIRA



Voltage	Body Material	IP	Mounting Type
100-240V	Aluminium	IP20	Suspended

Power	Type Of Bulb	Size	Housing Colour	SKU
MAX 35W	1x E27	Ø320mm	Black-White	ILAR-03755
	1x E27	Ø320mm	White-White	ILAR-03756

*Lamps not included.



JULLE



Voltage	Body Material	IP	Mounting Type
100-240V	Aluminium	IP20	Suspended

Power	Type Of Bulb	Size	Housing Colour	SKU
MAX 35W	1x E27	Ø300mm	Black	ILAR-03758
	1x E27	Ø300mm	White	ILAR-03757

*Lamps not included.

NOVVA



Voltage	Body Material	IP	Mounting Type
100-240V	Aluminium	IP20	Suspended

Power	Type Of Bulb	Size	Housing Colour	SKU
MAX 35W	1x E27	Ø800mm	Black-Copper	ILAR-03759

*Lamps not included.





INTERIOR


SURFACE LIGHT

ALL LIGHTING SOLUTIONS

VIGG








Voltage	Body Material	Beam Angle	IP	Mounting Type
200-240V	Aluminium	60°	IP54	Surface Mounted

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
10W	2700K	1090lm	White RAL 9016	ILAR-00998
			Black RAL 9005	ILAR-00999
10W	4000K	1090lm	White RAL 9016	ILAR-00996
			Black RAL 9005	ILAR-00997

ASH






Voltage	Body Material	Beam Angle	IP	Mounting Type
200-240V	Aluminum Die-Casting	45°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
6W	3000K	410lm	Grey	ILAR-00808



DESMI






Voltage	Body Material	Beam Angle	IP	Mounting Type
200-240V	Aluminum Die-Casting	60°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
10W	3CCT	1100lm	White RAL 9016	ILAR-03719
			Black RAL 9005	ILAR-03720
18W	3000K	1900lm	White RAL 9016	ILAR-02095
			Black RAL 9005	ILAR-03718



LEV





Voltage	Body Material	Beam Angle	IP	Mounting Type
200-240V	Aluminium	60°	IP54	Surface Mounted


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
15W	2700K	1300lm	White RAL 9016	ILAR-00695
	3000K	1300lm	White RAL 9016	ILAR-02520
	4000K	1500lm	White RAL 9016	ILAR-00696
	2700K	1300lm	Black RAL 9005	ILAR-00698
	4000K	1500lm	Black RAL 9005	ILAR-00699



VIGG GU10







Voltage	Body Material	IP	Mounting Type
110-240V	Aluminium	IP20	Surface


Power	Type of Bulb	Housing Colour	SKU
Max. 7W	1x GU10	White	ILAR-02452
		Black	ILAR-02453

*Lamps Not Included

LEV GU10







Voltage	Body Material	IP	Mounting Type
110-240V	Aluminium	IP20	Surface


Power	Type of Bulb	Housing Colour	SKU
Max. 7W	1x GU10	White	ILAR-02454
		Black	ILAR-02455

*Lamps Not Included

MINI LEV GU10 IP65








Voltage	Body Material	IP	Mounting Type
110-240V	Aluminium	IP65	Surface

Power	Type of Bulb	Housing Colour	SKU
Max. 7W	1x GU10	Black	ILAR-03674
		White	ILAR-03675

*Lamps Not Included

PRADO GU10





Voltage	Body Material	IP	Mounting Type
110-240V	Aluminium	IP20	Surface

Power	Type of Bulb	Housing Colour	SKU
Max. 7W	1x GU10	White	ILAR-03068
		Black	ILAR-03069

*Lamps Not Included

NATAN GU10

ONE








DOUBLE








TRIPLE








Voltage	Body Material	IP	Mounting Type
110-240V	Aluminium	IP20	Surface

Power	Model	Type of Bulb	Size	Housing Colour	SKU
Max. 7W	Single	1X GU10	110x90x10.5mm	White	ILAR-00885
				Black	ILAR-00893
Max. 2x 7W	Double	2X GU10	305x90x10.5mm	White	ILAR-00886
				Black	ILAR-01139
Max. 3x 7W	Triple	3X GU10	480x90x10.5mm	White	ILAR-00891
				Black	ILAR-01140

*Lamps Not Included

ROLL






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium + Glass	360°	IP20	Surface Mounted

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
18W	2700K	264lm	Copper	ILAR-02227



LUPO WALL





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	360°	IP54	Surface Mounted

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
15W	2700K	1092lm	Matt Black	ILAR-02228




TIDE











Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	60°	IP20	Wall Surface


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
8W	3000K	440lm	Matt White	ILAR-02233
			Matt Black	ILAR-02234

DUNA









Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	185°	IP20	Wall Surface


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
9W	3000K	855lm	315x85x33mm	White	ILAR-01742
				Black	ILAR-01743
				Wooden	ILAR-01744
				Golden	ILAR-01745
19W	3000K	1805lm	590x85x33mm	White	ILAR-01746
				Black	ILAR-03291
29W	3000K	3420lm	890x85x33mm	White	ILAR-01747
				Black	ILAR-03772



CUBE








Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	15°-120°	IP20	Wall Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
6W	3000K	570lm	White	ILAR-01740
			Black	ILAR-01741

ALPI







Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	120°	IP20	Wall Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
18W	3000K	1710lm	White	ILAR-01748
			Black	ILAR-01749




FREDI










Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	120°	IP20	Wall Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
9W	3000K	855lm	White	ILAR-01750
			Black	ILAR-01751

AIKA





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	PC+Aluminium	110°	IP20	Wall Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
12W	3CCT 3000K-4000K-5700K	1560lm	White	ILAR-02035





HAIA












Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	PC+Aluminium	110°	IP54	Wall Surface


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
10W	3CCT 3000K-4000K-5700K	1340lm	600x61x81mm	White	ILAR-02036
				Silver	ILAR-02037
				Gold	ILAR-02038
15W	3CCT 3000K-4000K-5700K	1950lm	900x61x81mm	White	ILAR-02039
				Silver	ILAR-02040

KIRA









Voltage	Body Material	Beam Angle	IP	Mounting Type	Rotable
220-240V	PC+Aluminium	120°	IP40	Wall Surface	Yes

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
10W	3CCT 3000K 4000K-5700K	1180lm	580x41x111x40x285mm	White	ILAR-02041
				Black	ILAR-02042
15W	3CCT 3000K 4000K-5700K	1850lm	860x41x111x40x440mm	White	ILAR-02043
				Black	ILAR-02044



94—109

48V

PROFESSIONAL 48V LIGHTING



ALL LIGHTING SOLUTIONS

TRACKLIGHT INSTALLATION


This magnetic rail with two copper conductors on each side acts as the phase and neutral of the circuit to power the lights installed on it. It also includes an iron strip that attracts magnetic lights, making installation extremely simple, with no tools required.

TRIMLESS RECESSED
AVAILABLE IN 2M
WHITE / BLACK


RECESSED
AVAILABLE IN 2M
WHITE / BLACK

SURFACE
AVAILABLE IN 2M
WHITE / BLACK

SUSPENDED
AVAILABLE IN 1M AND 2M
WHITE / BLACK

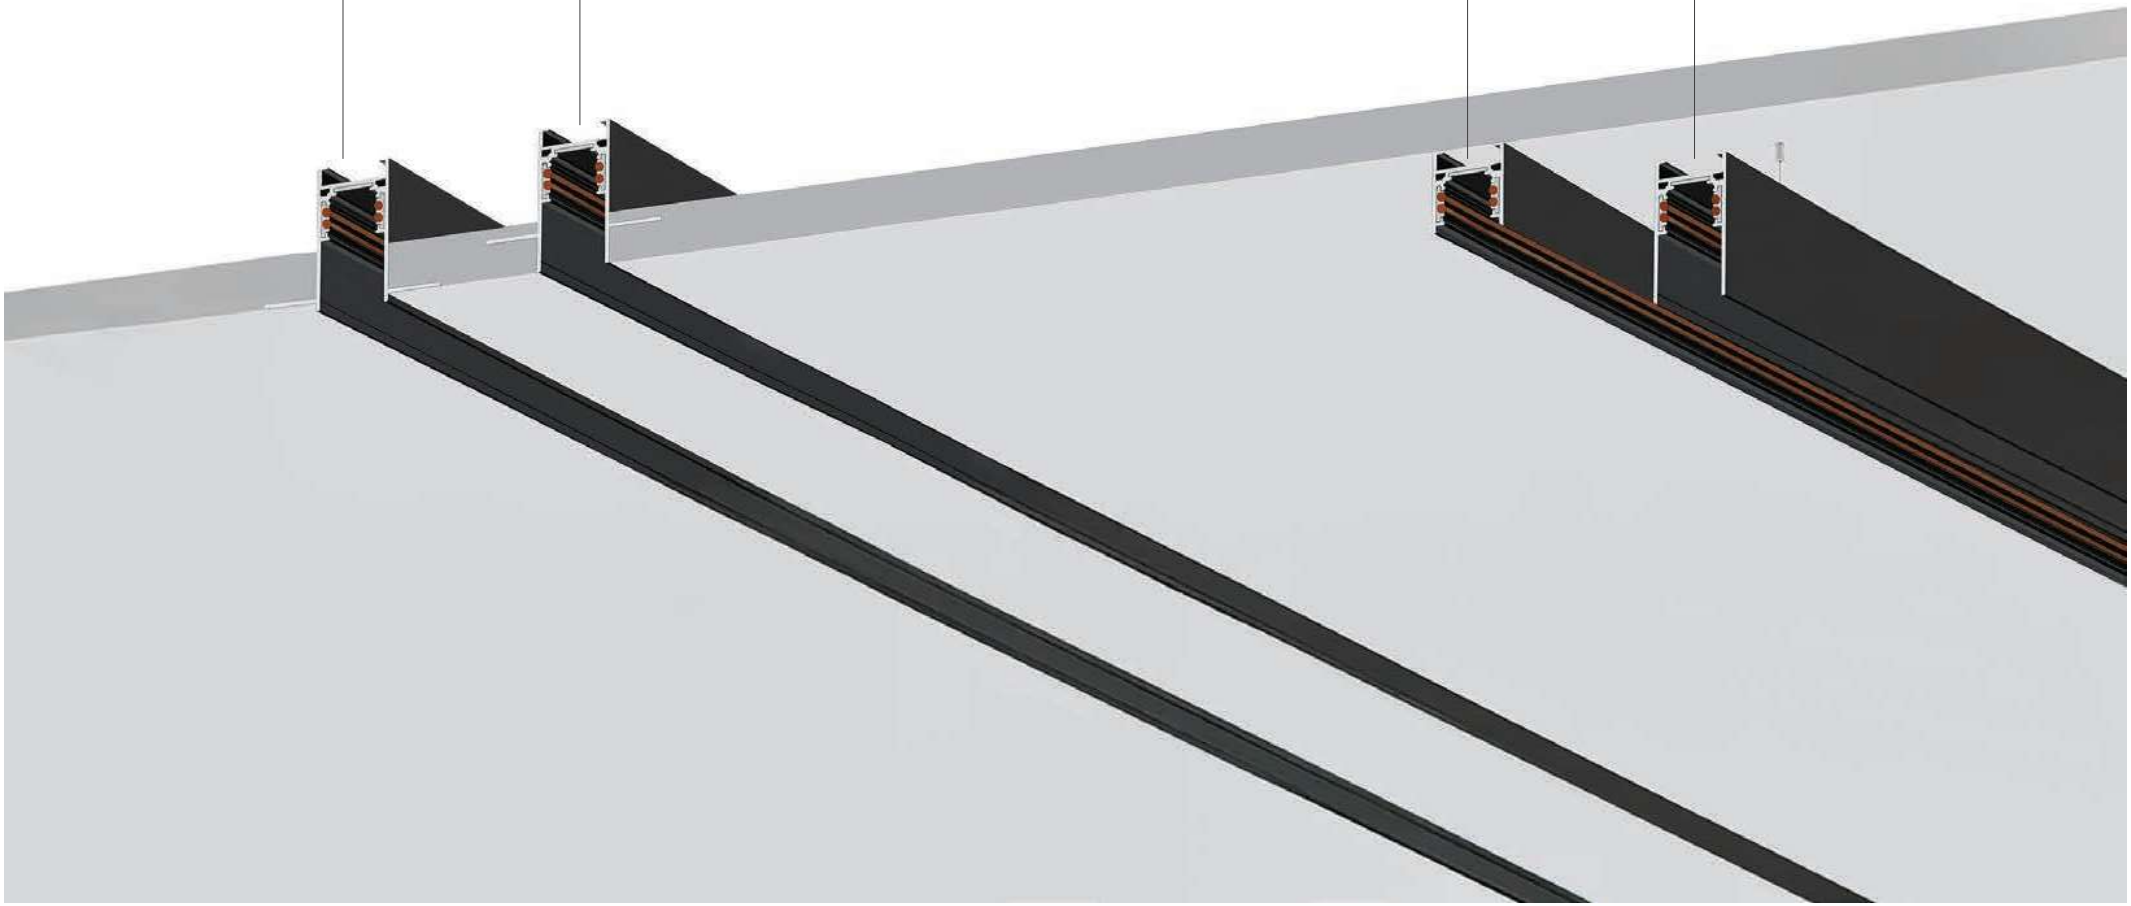


LINEAR DOT

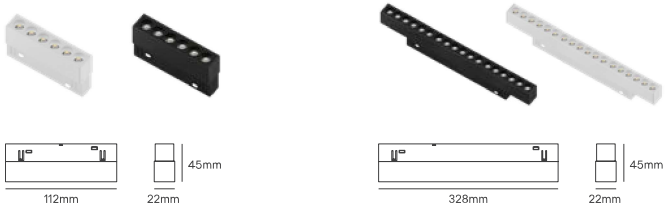

Voltage	Body Material	Beam Angle	IP	Mounting Type
48V	Aluminium	36°	IP20	Tracklight 48V

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
6W	2700K	240lm	L112	White	ILAR-03390
	4000K			White	ILAR-03392
	2700K			Black	ILAR-03391
	4000K			Black	ILAR-03393
18W	2700K	900lm	L328	White	ILAR-03394
	4000K			White	ILAR-03396
	2700K			Black	ILAR-03395
	4000K			Black	ILAR-03397

LINEAR DOT ROTABLE

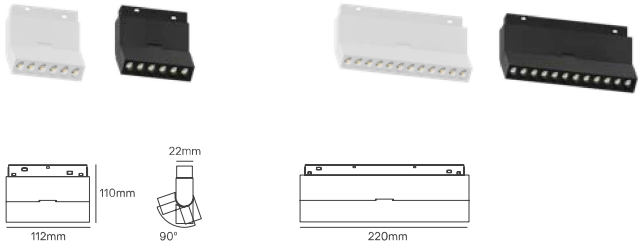


Voltage	Body Material	Beam Angle	IP	Mounting Type
48V	Aluminium	36°	IP20	Tracklight 48V

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
6W	2700K	240lm	L112	White	ILAR-03398
	4000K			White	ILAR-03400
	2700K			Black	ILAR-03399
	4000K			Black	ILAR-03401
12W	2700K	600lm	L220	White	ILAR-03402
	4000K			White	ILAR-03404
	2700K			Black	ILAR-03403
	4000K			Black	ILAR-03405






LINEAR OPAL

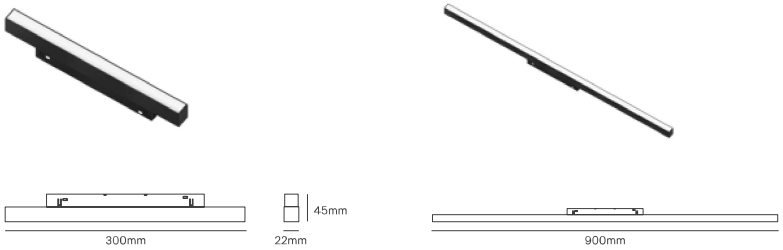

Voltage	Body Material	Beam Angle	IP	Mounting Type
48V	Aluminium	120°	IP20	Tracklight 48V

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
10W	2700K	500lm	L300	Black	ILAR-03406
	4000K			Black	ILAR-03407
30W	2700K	2100lm	L900	Black	ILAR-03408
	4000K			Black	ILAR-03409

CORNER OPAL

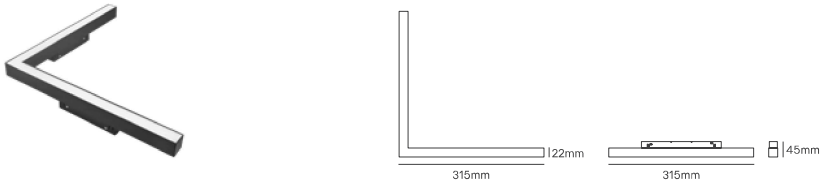


Voltage	Body Material	Beam Angle	IP	Mounting Type
48V	Aluminium	120°	IP20	Tracklight 48V

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
20W	2700K	1200lm	L315xW315	Black	ILAR-03410
	4000K			Black	ILAR-03411

TRACK / SUSPENDED BALL








Voltage	Body Material	Beam Angle	IP	Mounting Type
48V	Aluminium	340°	IP20	Tracklight 48V

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
Track	9W	2700K	360lm	D150	White	ILAR-03412
		4000K			White	ILAR-03413
Suspended	9W	2700K	360lm	D150	White	ILAR-03430
		4000K			White	ILAR-03431

SUSPENDED DROP






Voltage	Body Material	Beam Angle	IP	Mounting Type
48V	Aluminum	24°	IP20	Tracklight 48V

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
12W	2700K	600lm	White	ILAR-03434
			Black	ILAR-03435



SUSPENDED TUBE






Voltage	Body Material	Beam Angle	IP	Mounting Type
48V	Aluminum	36°	IP20	Tracklight 48V

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
9W	2700K	480lm	L300	White	ILAR-03432
				Black	ILAR-03433



SPOTLIGHT






Voltage	Body Material	Beam Angle	IP	Mounting Type
48V	Aluminum	24°	IP20	Tracklight 48V

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
7W	2700K	280lm	Ø35x80mm	White	ILAR-03414
	4000K			White	ILAR-03416
	2700K			Black	ILAR-03415
	4000K			Black	ILAR-03417
12W	2700K	600lm	Ø45x100mm	White	ILAR-03418
	4000K			White	ILAR-03420
	2700K			Black	ILAR-03419
	4000K			Black	ILAR-03421

SPOTLIGHT ZOOMABLE







Voltage	Body Material	Beam Angle	IP	Mounting Type
48V	Aluminum	Zoomable 15°-55°	IP20	Tracklight 48V

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	Size	SKU
7W	2700K	280lm	White	Ø35x80mm	ILAR-03422
	4000K		White		ILAR-03424
	2700K		Black		ILAR-03423
	4000K		Black		ILAR-03425
24W	2700K	1440lm	White	Ø65x135mm	ILAR-03426
	4000K		White		ILAR-03428
	2700K		Black		ILAR-03427
	4000K		Black		ILAR-03429



ACCESSORIES 48V IP20

		Size	Housing Colour	Body Material	SKU
SUSPENDED TRACKS AND CORNERS					
	20mm Susp Track	1000mm	White	Aluminium	ILAR-03335
	20mm Susp Track	2000mm	White		ILAR-03336
	20mm SUSP Track	1000mm	Black	Aluminium	ILAR-03337
	20mm Susp Track	2000mm	Black		ILAR-03338
	20mm Susp 90° Corner Connect Module		White	Aluminium	ILAR-03339
	20mm Susp 90° Corner Connect Module		Black	Aluminium	ILAR-03340
	20mm Susp 90° Vertical Corner		White	Aluminium	ILAR-03341
	20mm Susp 90° Vertical Corner		Black	Aluminium	ILAR-03342
	20mm Susp 90° Horizontal Corner		White	Aluminium	ILAR-03343
	20mm Susp 90° Horizontal Corner		Black	Aluminium	ILAR-03344
TRIMLESS RECESSED TRACKS AND CORNERS					
	20mm Trim Track	2000mm	White	Aluminium	ILAR-03345
	20mm Trim Track	2000mm	Black	Aluminium	ILAR-03346
	20mm Trim 90° Vertical Corner		White	Aluminium	ILAR-03347
	20mm Trim 90° Vertical Corner		Black	Aluminium	ILAR-03348
	20mm Trim 90° Horizontal Corner		White	Aluminium	ILAR-03349
	20mm Trim 90° Horizontal Corner		Black	Aluminium	ILAR-03350

ACCESSORIES 48V IP20


		Size	Housing Colour	Body Material	SKU
SURFACE TRACKS AND CORNERS					
	20mm Surf Track		2000mm	Aluminium	ILAR-03351
	20mm Surf Track		2000mm	Aluminium	ILAR-03352
	20mm Surf 90° Corner Connect Module		White	Aluminium	ILAR-03353
	20mm Surf 90° Corner Connect Module		Black	Aluminium	ILAR-03354
	20mm Surf 90° Vertical Corner		White	Aluminium	ILAR-03355
	20mm Surf 90° Vertical Corner		Black	Aluminium	ILAR-03356
	20mm Surf 90° Horizontal Corner		White	Aluminium	ILAR-03357
	20mm Surf 90° Horizontal Corner		Black	Aluminium	ILAR-03358
RECESSED TRACKS AND CORNERS					
	20mm Recess Track	2000mm	White	Aluminium	ILAR-03359
	20mm Recess Track	2000mm	Black	Aluminium	ILAR-03360
	20mm Recess 90° Vertical Corner		White	Aluminium	ILAR-03361
	20mm Recess 90° Vertical Corner		Black	Aluminium	ILAR-03362
	20mm Recess 90° Horizontal Corner		White	Aluminium	ILAR-03363
	20mm Recess 90° Horizontal Corner		Black	Aluminium	ILAR-03364

ACCESSORIES 48V IP20

		Size	Housing Colour	Body Material	SKU
CONNECTION ACCESSORIES					
	20mm Mini Wired Connect Module		White White	Aluminium	ILAR-03369
	20mm Mini Wired Connect Module		Black Black	Aluminium	ILAR-03370
	20mm Straight Connect Module		White	Aluminium	ILAR-03371
	20mm Straight Connect Module		Black	Aluminium	ILAR-03372
	20mm Input Connect Module		White	Aluminium	ILAR-03373
	20mm Input Connect Module		Black	Aluminium	ILAR-03374
	20mm Input Wired Connect Module		White	Aluminium	ILAR-03375
	20mm Input Wired Connect Module		Black	Aluminium	ILAR-03376
	20mm Central Corner Connect Module		White	Aluminium	ILAR-03377
	20mm Central Corner Connect Module		Black	Aluminium	ILAR-03378
	20mm Long Wired Connect Module		White	Aluminium	ILAR-03379
	20mm Long Wired Connect Module		Black	Aluminium	ILAR-03380

ACCESSORIES 48V IP20

		Size	Housing Colour	Body Material	SKU
INTRACK POWER SUPPLIES					
	20mm Intrack Power Supply 100W		White	Aluminium	ILAR-03386
	20mm Intrack Power Supply 100W		Black	Aluminium	ILAR-03387
	20mm Intrack Power Supply 200W		White	Aluminium	ILAR-03388
	20mm Intrack Power Supply 200W		Black	Aluminium	ILAR-03389
EMBELLISHMENT COVERS					
	20mm Cover Susp/Trim/Recess	1000mm	White	Aluminium	ILAR-03365
	20mm Cover Susp/Trim/Recess	1000mm	Black	Aluminium	ILAR-03366
	20mm Cover Surf	1000mm	White	Aluminium	ILAR-03367
	20mm Cover Surf	1000mm	Black	Aluminium	ILAR-03368
MOUNTING ACCESSORIES					
	20mm Track Plate Connector		White	Aluminium	ILAR-03381
	20mm Track Plate Connector		Black	Aluminium	ILAR-03382
	20mm Sus KIT			Aluminium	ILAR-03383
	20mm Sus KIT			Aluminium	ILAR-03384
	20mm Recess/Trim Kit			Aluminium	ILAR-03385

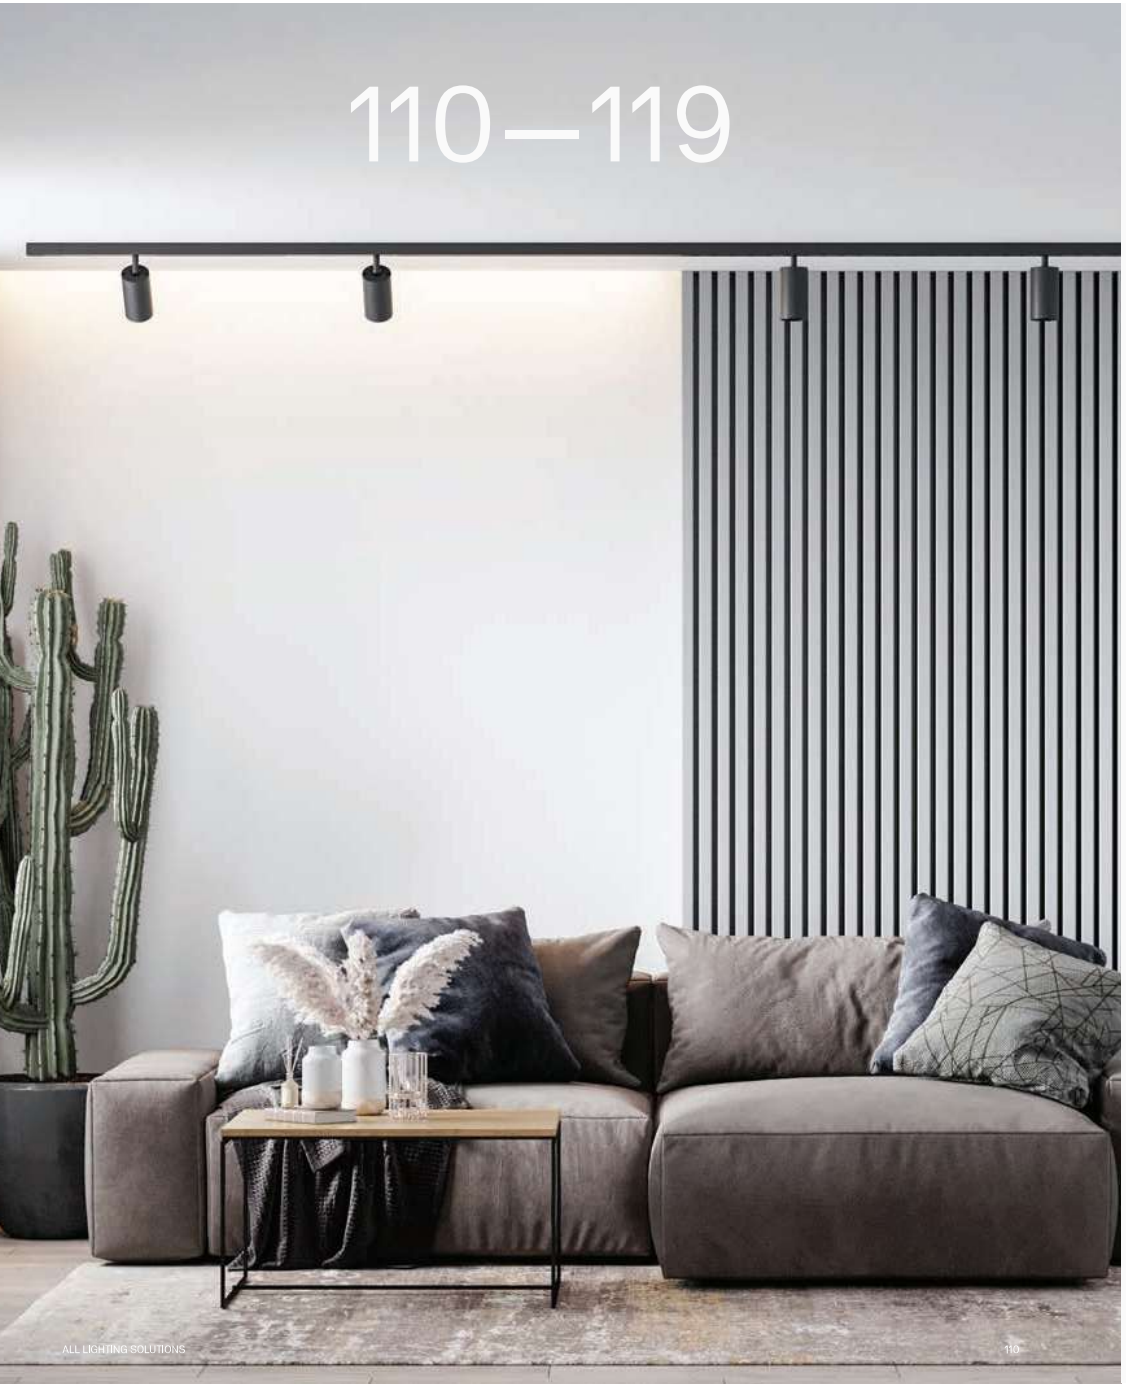

INTERIOR

TRACKLIGHT


ALL LIGHTING SOLUTIONS

PRADO PRO









Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	36°	IP20	Tracklight

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
20W	3CCT 3000K-4000K-6000K	1900lm	Black	ILAR-02870
			White	ILAR-02871
30W		3150lm	Black	ILAR-02872
			White	ILAR-02873

Options (Not included)



Ring+Honeycomb
Black - 20W
ILAR-02874

Ring+Honeycomb
White - 20W
ILAR-02875



Ring+Honeycomb
Black - 30W
ILAR-02876

Ring+Honeycomb
White - 30W
ILAR-02877

PRADO ZOOM







Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	20°-60°	IP20	Tracklight

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
20W	3CCT 3000K-4000K-6000K	1900lm	Black	ILAR-02833
			White	ILAR-02832
30W		3150lm	Black	ILAR-02839
			White	ILAR-02840

Options (Not included)



Ring+Honeycomb
Black - 20W
ILAR-02835

Ring+Honeycomb
White - 20W
ILAR-02834



Ring+Honeycomb
Black - 30W
ILAR-02842


Ring+Honeycomb
White - 30W
ILAR-02841



PRADO SMART







Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	36°	IP20	Tracklight


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
30W	3CCT 2700K-6500K	1890lm	Black	ILAR-01734
			White	ILAR-01735
30W	RGB+CCT 2700K-6500K		Black	ILAR-01788
			White	ILAR-01736



NATAN GU10








Voltage	Body Material	IP	Mounting Type
110-220V	Aluminium	IP20	Tracklight

Power	Type of Bulb	Housing Colour	SKU
Max. 7W	1x GU10	White RAL 9016	ILAR-00884
		Black RAL 9005	ILAR-00950

*Lamps Not Included

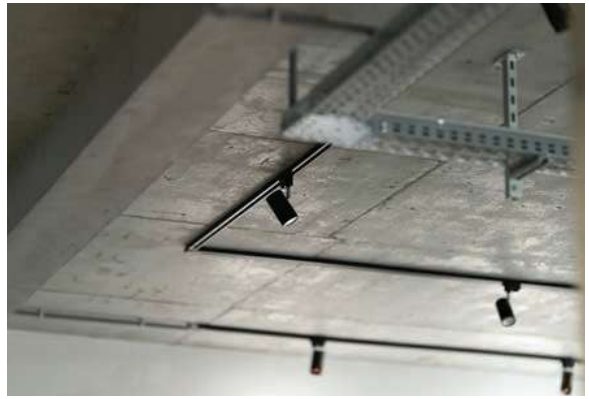

LINEA





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	120°	IP20	Tracklight

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
24W-18W	3CCT 3000K-4000K-6000K	3600lm	White RAL 9016	ILAR-02869

3-PHASE TRACKLIGHT

		Mounting Type	Size	Housing Colour	Body Material	IP	SKU
	Tracklight	Surface	1000mm	White	Aluminium	IP20	ILAR-00590
	Tracklight	Surface	2000mm	White	Aluminium	IP20	ILAR-00591
	Tracklight	Recessed	1000mm	White	Aluminium	IP20	ILAR-00592
	Tracklight	Recessed	2000mm	White	Aluminium	IP20	ILAR-00593
	Cap		1000mm	White	Plastic	IP20	ILAR-02946
	Tracklight	Surface	1000mm	Black	Aluminium	IP20	ILAR-01006
	Tracklight	Surface	2000mm	Black	Aluminium	IP20	ILAR-01007
	Cap		1000mm	Black	Plastic	IP20	ILAR-02947

ACCESSORIES FOR 3-PHASE TRACKLIGHT

		Housing Colour	Body Material	IP	SKU
	Power Supply Left side	White	Aluminium	IP20	ILAR-00594
	Power Supply Left side	Black	Aluminium	IP20	ILAR-01011
	Internal Tracklight Union	White	Aluminium	IP20	ILAR-00596
	Internal Tracklight Union - Recessed	White	Aluminium	IP20	ILAR-01145
	Internal Tracklight Union	Black	Aluminium	IP20	ILAR-01083
	Middle Tracklight Union	White	Aluminium	IP20	ILAR-00597
	Middle Tracklight Union	Black	Aluminium	IP20	ILAR-01084
	Jointed Union Tracklight	White	Aluminium	IP20	ILAR-01389
	Jointed Union Tracklight	Black	Aluminium	IP20	ILAR-02679
	“L” Tracklight Union Left side	White	Aluminium	IP20	ILAR-00598

ACCESSORIES FOR 3-PHASE TRACKLIGHT

		Housing Colour	Body Material	IP	SKU
	“L” Tracklight Union Left side	Black	Aluminium	IP20	ILAR-01171
	“L” Tracklight Union Three-Phase - Recessed	White	Aluminium	IP20	ILAR-02570
	“T” Tracklight Union Left side	White	Aluminium	IP20	ILAR-00599
	“T” Tracklight Union Left side	Black	Aluminium	IP20	ILAR-01453
	“+” Tracklight Union Left side	White	Aluminium	IP20	ILAR-00600
	“+” Tracklight Union Left side	Black	Aluminium	IP20	ILAR-01454
	Adapter with Connection for Three-Phase Tracklight	Black	Aluminium+PC	IP20	ILAR-01215
	Adapter with Connection for Three-Phase Tracklight	White	Aluminium+PC	IP20	ILAR-01216
	Adapter with Schuko	White	Aluminium+PC	IP20	ILAR-02950
	Adapter with Schuko	Black	Aluminium+PC	IP20	ILAR-02951
	Round Base Recessed Three-Phase	White	Aluminium+PC	IP20	ILAR-02948
	Round Base Recessed Three-Phase	Black	Aluminium+PC	IP20	ILAR-02949
	End Cap	White	Plastic	IP20	ILAR-00595
	End Cap	Black	Plastic	IP20	ILAR-01012
	Suspension Tracklight	White	Aluminium+PC	IP20	ILAR-01141
	Suspension Tracklight	Black	Aluminium+PC	IP20	ILAR-01142
	Accessory for Fixing Three-Phase Recessed Rail		Aluminium	IP20	ILAR-02302

TRUNKING LIGHT





Voltage	Body Material	IP	Mounting Type
170-265V	Steel	IP20	Suspended

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Beam Angle	Housing Colour	SKU
50W	4000K	8000lm	1500x70x76mm	90°	White	ILAR-00760
				120°		ILAR-00761
50W - Emergency				120°		ILAR-01640

Options (Not included)



Final Rail Module
5 Wires - 1.5m
ILAR-00763



Linear Rail Module
5 Wires - 1.5m
ILAR-00762



Conector Feed-in
ILAR-00764

Suspending Kit
ILAR-00766



End Cap
ILAR-00765



Rail Cover
1500mm




Emergency Kit



1-10V Dimming Driver




Linear Rail for Track Light
*Lamp not included

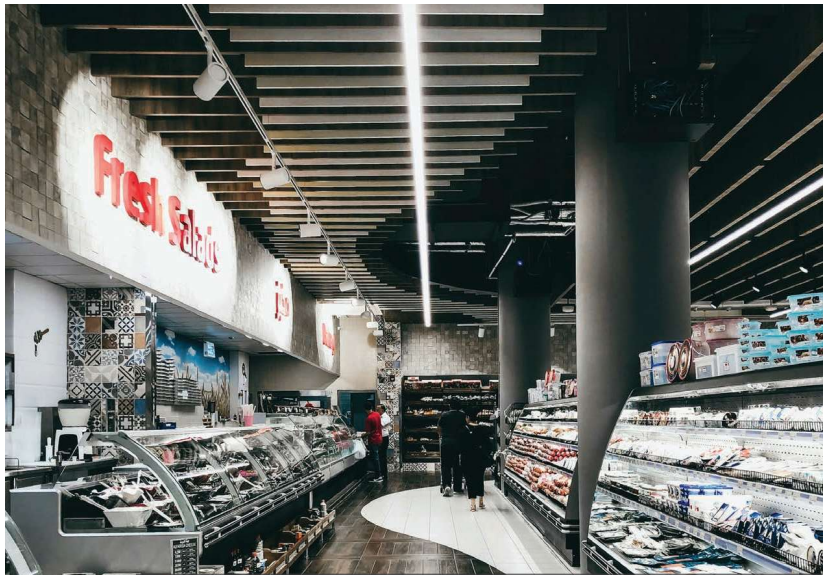

SENA








Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Die-cast Aluminum and PC Reflector	75°	IP40	Suspended

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
Switch 60W-35W-25W	3CCT 3000K-4000K-5000K	7800/4550/3250lm	White	ILAR-02128

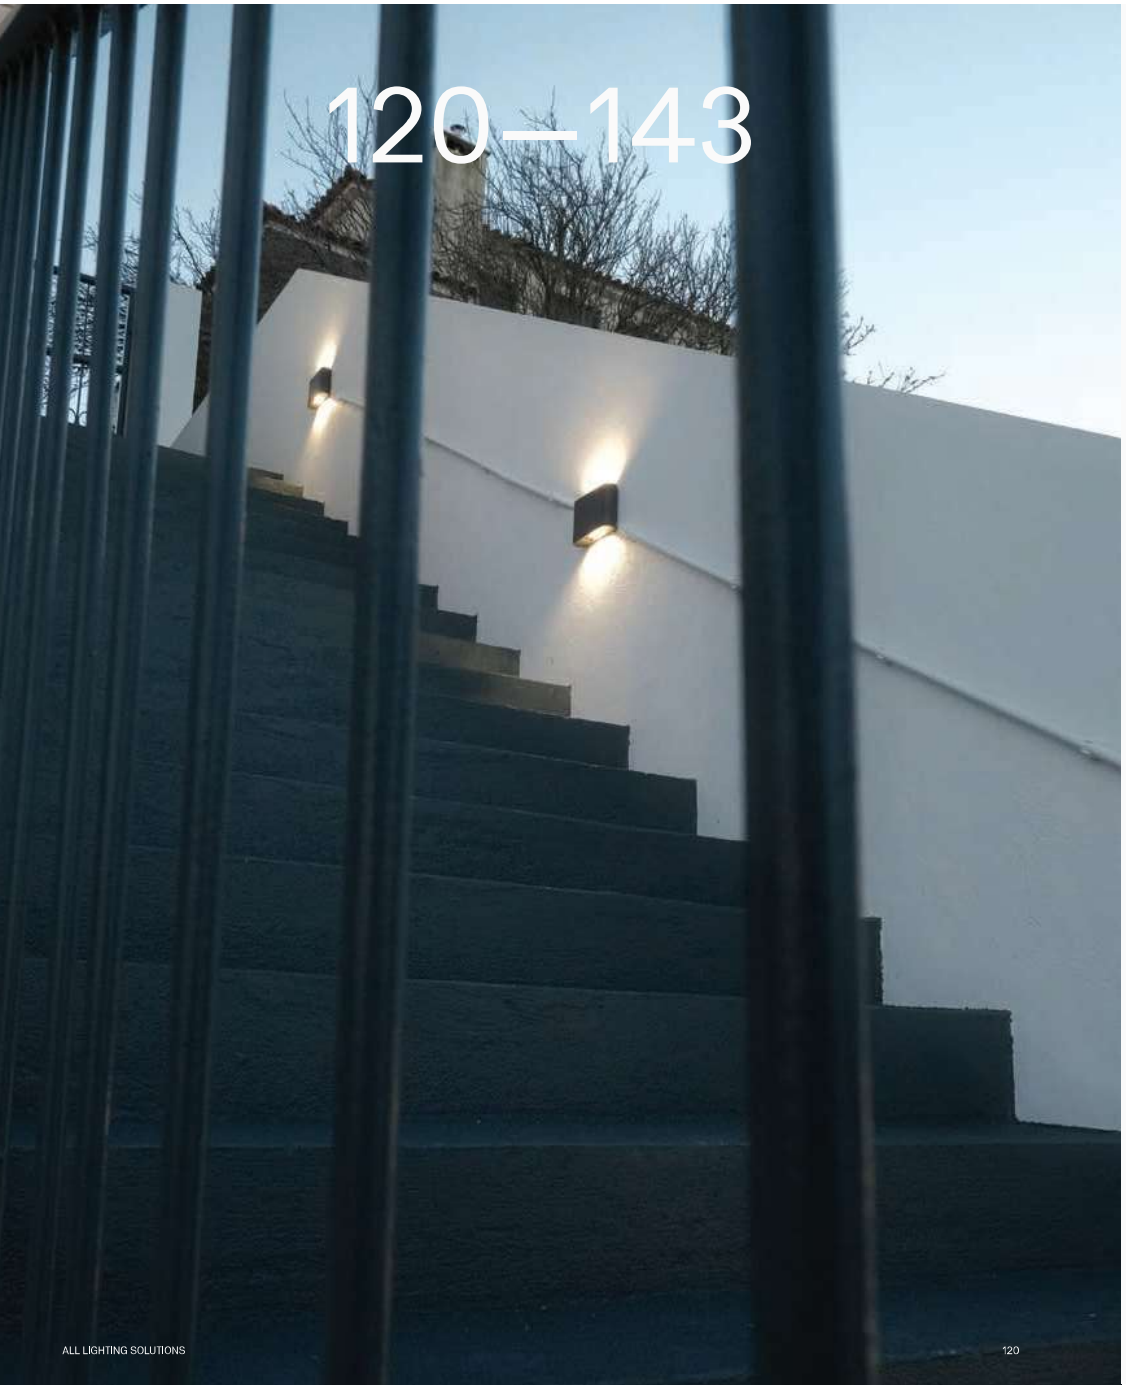


EXTERIOR

WALL SURFACE


CHUNK





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium Alloy	30°	IP66	Surface


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
Power Switch 40W-36W-30W-25W-20W	3CCT 2700K- 3000K-4000K	4800lm	Dark Grey	ILAR-02625

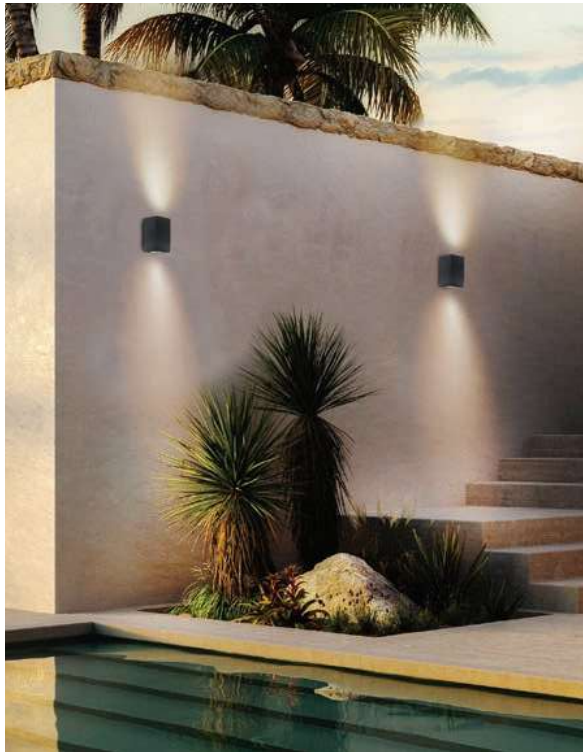

CLIF








Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Die-casting aluminium	80°	IP65	Wall Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
20W	3000K	1950lm	Grey	ILAR-03716
2x 20W	3000K	3800lm	Grey	ILAR-03717

HARPE





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	97°	IP65	Surface


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
2x 6W	3000K	900lm	Grey	ILAR-00962
6W		450lm		ILAR-00961



PINE / ALDER








Voltage	Body Material	IP	Mounting Type
100-240V	Die-casting Aluminium	IP65	Surface

Model	Power	Type Of Bulb	Size	Housing Colour	SKU
Alder	MAX 35W	1x GU10	78x70x100mm	Grey	ILAR-00811
				White	ILAR-03714
Pine	MAX 2x 35W	2x GU10	78x70x165mm	Grey	ILAR-00810
				White	ILAR-03713

*Lamps not included.

PARKE GU10





Voltage	Body Material	IP	Mounting Type
100-240V	Die-casting Aluminium	IP44	Surface


Power	Type Of Bulb	Size	Housing Colour	SKU
MAX 35W	1x GU10	90x80x67mm	Grey	ILAR-00965
			White	ILAR-00966
MAX 2x 35W	2x GU10	90x156x67mm	Grey	ILAR-00967
			White	ILAR-00968

*Lamps not included.



BAO






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Die-Casting Aluminium	2x 0-90°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
12W	3000K	440lm	Grey	ILAR-00816



ABRITER






Voltage	Body Material	Beam Angle	IP	Mounting Type
100-240V	Aluminium Alloy	120°	IP66	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
12W	RGB + CCT 2700K-6500K	1000lm	Black	ILAR-02282



FISHER





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Die-Casting Aluminium	90°	IP54	Surface


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
10W	3000K	900lm	Grey	ILAR-00959
			White	ILAR-00960



CANNA PRO








Voltage	Body Material	Beam Angle	IP	Mounting Type
200-240V	Die-Casting Aluminium	115-110° Asymmetric 40°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
15W	3CCT 2700K-3200K-4000K	900-1200lm	White	ILAR-03683
			Black	ILAR-03684
			Grey RAL7016	ILAR-03685

ARCO








Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	110°	IP65	Wall Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
10W	2700K	715lm	White	ILAR-02771
			Antracite	ILAR-02772

KANE WALL






Voltage	Body Material	IP	Mounting Type
100-240V	Aluminium	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
10W	2CCT 3000K-4000K	650lm	Grey RAL 7016	ILAR-01682



ALFA WALL






Voltage	Body Material	IP	Mounting Type
100-240V	Aluminium	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
13W	3000K	850lm	Grey RAL 7016	ILAR-01684



LINCE






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminum	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
14W	3000K	1290lm	Black	ILAR-02079



LOG




Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminum	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
18W	3000K	1840lm	Black	ILAR-02080



TAKO






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Die-Casting Aluminium	104°	IP54	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
2x 5W	3000K	600lm	Black	ILAR-00963
			White	ILAR-00964



LYRA





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminum	15°-120°	IP65	Wall Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
10W	2700K	750lm	White	ILAR-00769
			Black	ILAR-00860
10W	4000K	900lm	White	ILAR-00861
			Black	ILAR-00770




AXEL



Voltage	Body Material	IP	Beam Angle	Mounting Type
220-240V	Die-Casting Aluminium	IP65	2x 0-100°	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
2x 6W	3000K	415lm	Grey	ILAR-00815
			White	ILAR-03715






NUT



Voltage	Body Material	IP	Beam Angle	Mounting Type
220-240V	Die-Casting Aluminium	IP54	2x 110°	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
2x 3W	3000K	450lm	Grey	ILAR-00814






THULE



Voltage	Body Material	IP	Beam Angle	Mounting Type
220-240V	Die-Casting Aluminium	IP54	120°	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
12W	3000K	415lm	Grey	ILAR-00820






AXIS



Voltage	Body Material	IP	Beam Angle	Mounting Type
220-240V	Aluminium	IP65	36°	Surface

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
Single	5W	3000K	45lm	Matt Black	ILAR-02237
Double	10W		88lm		ILAR-02238






ARI



Voltage	Body Material	IP	Mounting Type
100-240V	Aluminium/Glass	IP65	Surface

Power	Type Of Bulb	Size	Housing Colour	SKU
MAX 25W	1x E27	140x260x136mm	Grey	ILAR-00882

*Lamps not included.






GATE



Voltage	Body Material	IP	Mounting Type
100-240V	Aluminium/Glass	IP65	Surface

Power	Type Of Bulb	Size	Housing Colour	SKU
MAX 60W	1x E27	140x140x400mm	Grey	ILAR-00951

*Lamps not included.






TULIP




Voltage	Body Material	IP	Mounting Type
100-240V	Die-Casting Aluminium	IP54	Surface

Power	Type Of Bulb	Size	Housing Colour	SKU
MAX 35W	1x GU10	Ø60x112x95x555mm	Grey	ILAR-00824

*Lamps not included.



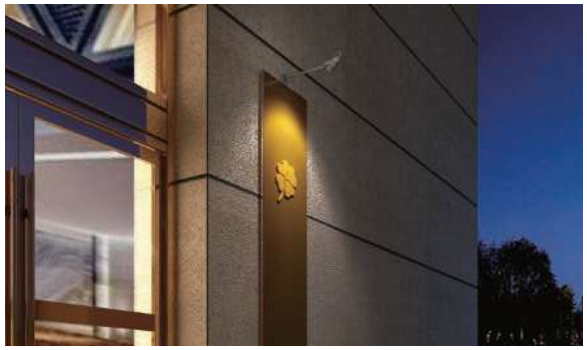


ELM



Voltage	Body Material	IP	Mounting Type
100-240V	Die-Casting Aluminium	IP54	Surface

Power	Type Of Bulb	Size	Housing Colour	SKU
MAX 35W	1x GU10	Ø65x90x55x115mm	Grey	ILAR-00823


*Lamps not included.






STUDE





Voltage	Body Material	Beam Angle	IP	Mounting Type
100-240V	Die-Cast Aluminum	180°	IP65	Surface


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
8W	3000K	600-670lm	Grey RAL 7016	ILAR-01109

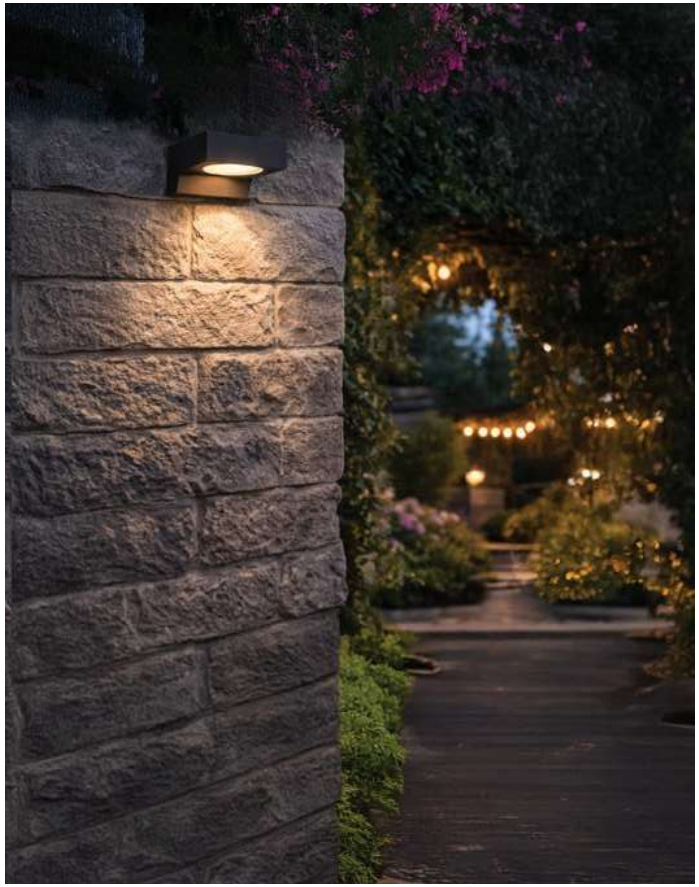

ARLO








Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	ABS + PC	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
21W	3CCT 3000K-4000K-6500K	1300lm	White	ILAR-02576
			Grey	ILAR-02575

ST53KH LUMINAIRE




Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	ABS + PC	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
Switch 12W/15W/20W	4000K	1200-1500-2000lm	White	ILAR-02764

NORA








Voltage	Body Material	IP	Mounting Type
100-240V	ABS + PC	IP54	Surface

Power	Type Of Bulb	Size	Housing Colour	SKU
MAX 60W	1x E27	223x170x243mm	White	ILAR-00978
			Black	ILAR-00979

*Lamps not included.

PHIL






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	ABS + PC	120°	IP54	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
8W	4500K	560lm	White	ILAR-00955
12W		840lm		ILAR-00879

FENIX






Voltage	Body Material	IP	Mounting Type
100-240V	ABS + PC	IP65	Surface

Power	Type Of Bulb	Size	Housing Colour	SKU
MAX 35W	1x E27	220x130x91mm	White	ILAR-00352

*Lamps not included.

NOA






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	ABS + PC	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
12W	3CCT 3000K-4000K-6500K	1200lm	Grey White	ILAR-02083 ILAR-02683

CANNA






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	ABS + PC	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
12W	3CCT 3000K-4000K-6500K	800lm	Grey White	ILAR-02519 ILAR-01674

IVY / HANA






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	ABS + PC	120°	IP65	Surface

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
IVY	8W	4000K	700lm	Grey	ILAR-00796
HANA	8W		670lm		ILAR-00797

INDIGO






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	ABS + PC	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
12W	4000K	700lm	Grey	ILAR-00798
	3CCT 3000K-4000K-6500K	700lm	Grey	ILAR-03652
	3CCT 3000K-4000K-6500K	700lm	Black	ILAR-02816

AVENCA







Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	ABS + PC	104°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
6W	3CCT 3000K-4000K-6500K	480lm	White	ILAR-01662
			Black	ILAR-02065
6W (Sensor)	3CCT 3000K-4000K-6500K	480lm	White	ILAR-02682

CARMO






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	ABS + PC	110°	IP65	Surface

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
Square	3W	3CCT 3000K-4000K-6500K	100lm	White	ILAR-02677
			100lm	Grey	ILAR-02678
		4000K	100lm	Grey	ILAR-00974
Round	3W	3CCT 3000K-4000K-6500K	100lm	White	ILAR-02573
				Grey	ILAR-02574

ASTER






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	ABS + PC	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
4W	3CCT 3000K- 4000K-6500K	220lm	White	ILAR-02012
			Grey	ILAR-01675

JADE





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	ABS + PC	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
4W	3CCT 3000K- 4000K-6500K	280lm	White	ILAR-01641
			Grey	ILAR-01497
			Black	ILAR-01642


HERA





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	ABS + PC	32°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
2W	3CCT 3000K- 4000K-6500K	120lm	White	ILAR-01498
			Grey	ILAR-01673
			Black	ILAR-01816

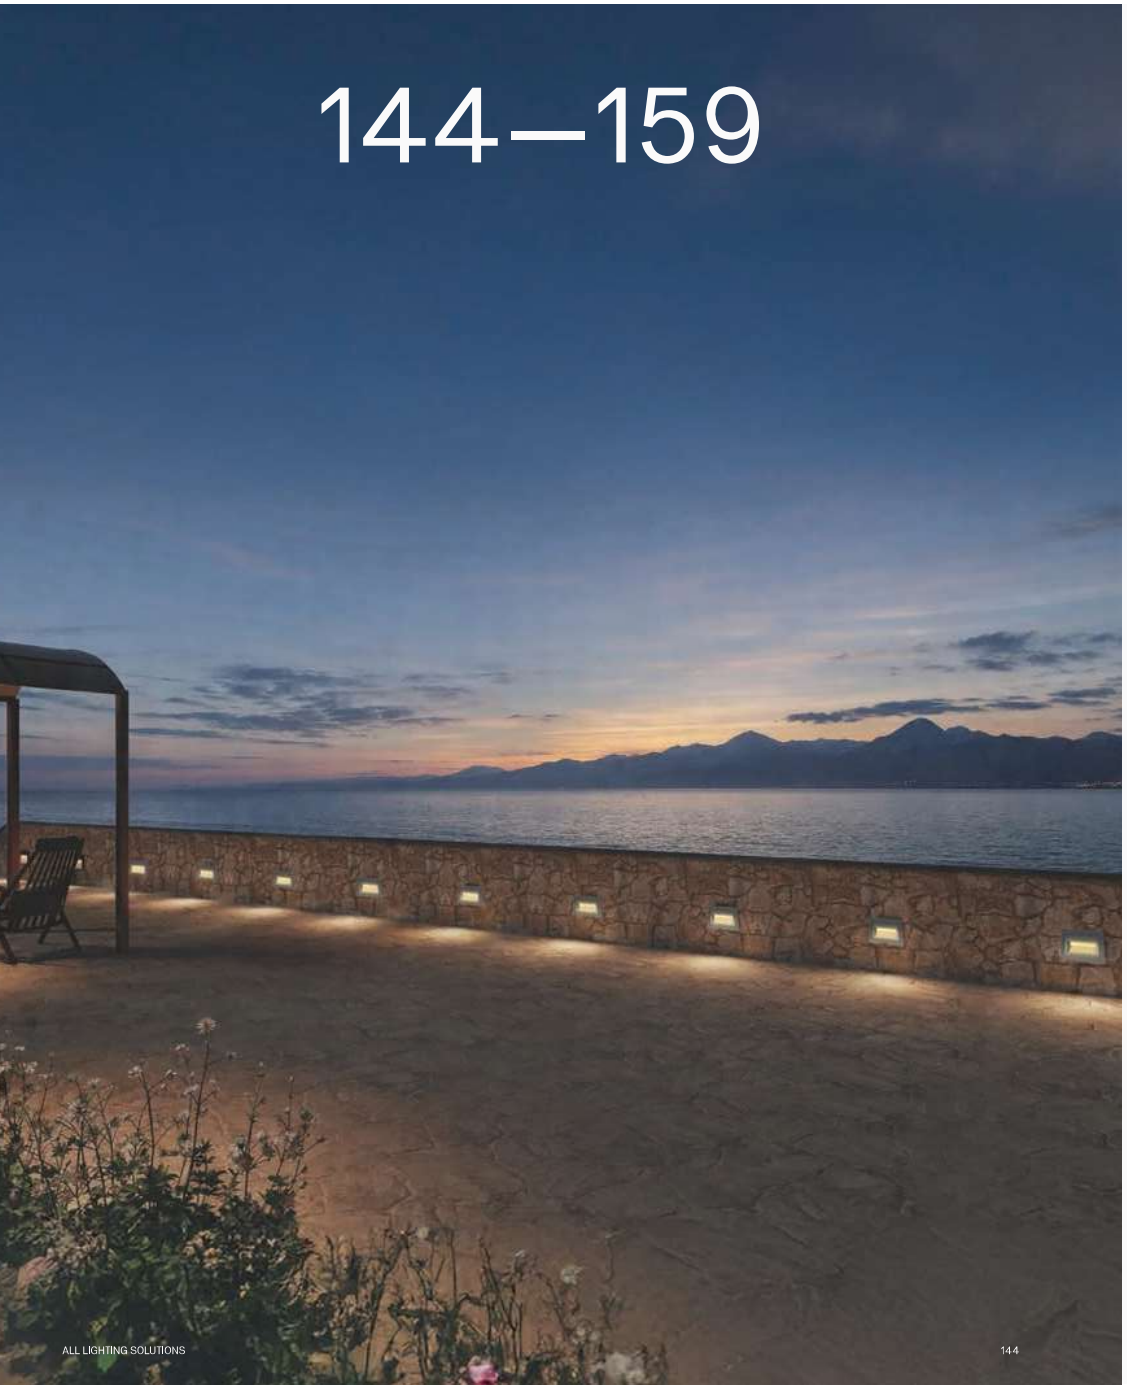

EXTERIOR


RECESSED

NIXEN



Voltage	Body Material	Beam Angle	IP	Mounting Type
85-265V	Die-cast Aluminum	90°	IP65	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Cut-out	Housing Colour	SKU
6W	3000K	480lm	250x70mm	Grey	ILAR-02203






LEIA



Voltage	Body Material	Beam Angle	IP	Mounting Type
85-265V	Die-cast Aluminum	90°	IP65	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Cut-out	Housing Colour	SKU
3W	3000K	240lm	99x50x50mm	Grey	ILAR-02204






VOXEL



Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	ABS + PC	120°	IP65	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Cut-out	Housing Colour	SKU
3W	3CCT 3000K 4000K-6500K	220lm	130x40x62mm	Black	ILAR-01499






VITA



Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Die-cast Aluminum	110°	IP65	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Cut-out	Housing Colour	SKU
11W	3000K	680lm	251x72mm	Grey	ILAR-00821






CUADRADO







Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	120°	IP65	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Housing Colour	SKU
20W	3CCT 3000K-4000K-6500K	1200lm	200x200x95mm	190x190x80mm	White	ILAR-02145
					Grey	ILAR-02146




CEDAR



Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Die-casting Aluminium	100°	IP65	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Housing Colour	SKU
3W	3000K	100lm	80x80x46mm	Ø74mm	Grey	ILAR-00822






SKILL











Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	PC+ABS Housing, PC Diffuser	110°	IP65	Recessed

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Housing Colour	SKU
Skill 1x E27	9W Max.	1x E27		247x108x88mm	230x94x85mm	White RAL 9016	ILAR-02936
						Black RAL 9005	ILAR-02937
						Stainless Steel	ILAR-02938
Skill	10W	3CCT 3000K-4000K-6500K	380lm	247x108x88mm	230x94x85mm	White RAL 9016	ILAR-02939
						Black RAL 9005	ILAR-02940
						Stainless Steel	ILAR-02941
Skill Brick	10W	3CCT 3000K-4000K-6500K	380lm	247x108x88mm	230x94x85mm	White RAL 9016	ILAR-02942
						Black RAL 9005	ILAR-02943

Options (Included / Incluídas / Incluido)



Recessed Box
ILAR-02944



SPOTLIGHT 12V





Voltage	Body Material	Beam Angle	IP	Mounting Type
DC12V	Aluminium	36°	IP66	Inground/Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Cut-out	Housing Colour	SKU
3W	CCT 2700K-6500K RGB RGBW	154lm	Ø33-36mm	Grey	ILAR-01731 ILAR-01732 ILAR-01733


Options (Not included)



Power Cable for
ILAR-01731 (CCT)
ILAR-01874



Extension Cable for
ILAR-01731 (CCT)
ILAR-01875



Power Cable for
ILAR-01732 (RGB)
ILAR-01876



Extension Cable for
ILAR-01732 (RGB)
ILAR-01877



Power Cable for
ILAR-01732 (RGB)
ILAR-01878



Extension Cable for
ILAR-01732 (RGB)
ILAR-01879




MELLER









Voltage	Body Material	Beam Angle	Sensor Distance	IP	Mounting Type
175-265V	Die-cast Aluminum	38°	1-3m	IP65	Recessed

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Housing Colour	SKU
Base	3W	3CCT 3000K-4000K-6000K	120lm	Ø79mm	Ø59x54mm	Black	ILAR-01050
Base	2W (Sensor)	3CCT 3000K-4000K-6000K	100lm	82.5mm	62x37mm	Grey	ILAR-01230

Options (Not included)



Grey - Round
ILAR-01051



White - Round
ILAR-01052



Grey - Round
ILAR-01053



White - Round
ILAR-01054



Black - Round
ILAR-01098



Black - Round
ILAR-01164



Grey - Square
ILAR-01055

White - Square
ILAR-01056



Black - Square
ILAR-01097



Grey - Square
ILAR-01057

White - Square
ILAR-01058



Black - Square
ILAR-01099



Black - Sensor - Square
ILAR-01231




White - Sensor - Square
ILAR-01232

MELLER II







Voltage	Body Material	Beam Angle	Sensor Distance	IP	Mounting Type
85-265V	Die-cast Aluminum	10°-90°	1-3m	IP65	Recessed

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Housing Colour	SKU
Base	3W	3CCT 2700K-3000K-4000K	240lm	90x90x55mm	80x80x50mm	Grey	ILAR-02862
Base	3W (Sensor)	3CCT 3000K-4000K-6000K	240lm			Black	ILAR-02189

Options (Not included)



White - Slot ILAR-02173 | Black - Slot ILAR-02174 | Grey - Slot ILAR-02175 | Golden - Slot ILAR-02176 | White - Oval ILAR-02177 | Black - Oval ILAR-02178 | Grey - Oval ILAR-02179 | Golden - Oval ILAR-02180




White - Rectangle ILAR-02181 | Black - Rectangle ILAR-02182 | Grey - Rectangle ILAR-02183 | Golden - Rectangle ILAR-02184 | White - Trapezoid ILAR-02185 | Black - Trapezoid ILAR-02186 | Black - Trapezoid ILAR-02187 | Black - Trapezoid ILAR-02188



Black - Sensor - Slot ILAR-02190 | Grey - Sensor - Oval ILAR-02191 | White - Sensor - Rectangle ILAR-02192 | Golden - Sensor - Trapezoid ILAR-02193

PINI






Voltage	Body Material	Beam Angle	Sensor Distance	IP	Mounting Type
85-265V	Aluminum	38°	1-3m	IP45	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Housing Colour	SKU
3W	3000K	80lm	Ø45x60mm	Ø40x60mm	White	ILAR-02868
					Black	ILAR-02866
					Grey	ILAR-02864
3W (Sensor)	3000K	80lm	Ø45x60mm	Ø40x60mm	White	ILAR-02865
					Black	ILAR-02863
					Grey	ILAR-02867



SLIT





Voltage	Body Material	Beam Angle	IP	Mounting Type
85-265V	Aluminum	10°	IP65	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Housing Colour	SKU
3W	3CCT 3000K-4000K-6000K	240lm	185x40x44mm	170x33x41mm	White	ILAR-02194
					Black	ILAR-02195
					Grey	ILAR-02196
3W	3CCT 2700K-3000K-4000K	240lm	185x40x44mm	170x33x41mm	White	ILAR-02861
					Black	ILAR-02859
					Grey	ILAR-02860



KATA









Voltage	Body Material	Beam Angle	IP	Mounting Type
24V	Aluminum + SS316	Optional	IP67	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
2.7W	3000K	245lm	Grey	ILAR-03521

Mandatory Options (Not included)



Flat Cover 360°
ILAR-03522



Cone Top Light Cover
ILAR-03523



1-Way Cover
ILAR-03524



2-Way Cover
ILAR-03525



3-Way Cover
ILAR-03526



4-Way Cover
ILAR-03527

VINI



Voltage	Body Material	Beam Angle	IP	Mounting Type
12V	Stainless Steel 316	120°	IP67	Inground

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
3W	3000K	195lm	Stainless Steel	ILAR-01198






KARI



Voltage	Body Material	IP	Mounting Type
110-220V	Aluminum + SS316	IP67	Inground

Power	Type of Bulb	Housing Colour	SKU
MAX 35W	1x GU10	Stainless Steel	ILAR-01167

*Lamps not included.





OTTO



Voltage	Body Material	IP	Mounting Type
110-220V	Stainless steel 316	IP66	Inground

Power	Type of Bulb	Housing Colour	SKU
MAX 35W	1x GU10	Stainless Steel	ILAR-01166

*Lamps not included.






OAK



Voltage	Body Material	IP	Mounting Type
110-220V	Stainless steel 316	IP67	Inground

Power	Type of Bulb	Housing Colour	SKU
MAX 35W	1x GU10	Stainless Steel	ILAR-00827

*Lamps not included.






JOCKA







Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V 24V	Stainless Steel+Aluminium	25°/50°/120°	IP68	Inground

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Housing Colour	SKU
3W-6W	2700K/3000K/	600lm Max.	Ø120x94mm	Ø100mm	Stainless Steel	On-request
6W-12W	4000K/RGBW	1200lm Max.	Ø150x114mm	Ø133mm	Stainless Steel	On-request
12W-25W		2500lm Max.	Ø180x125mm	Ø164mm	Stainless Steel	On-request
25W-40W		4000lm Max.	Ø220x136mm	Ø204mm	Stainless Steel	On-request
40W-60W		6000lm Max.	Ø260x136mm	Ø243mm	Stainless Steel	On-request

Options (Not included)




Honeycomb
On-request



Difuser Optics
On-request

OTTO ROTABLE






Voltage	Body Material	Beam Angle	Tiltable Angle	IP	Mounting Type
220-240V	Die-casting Aluminium	50°	+- 15°	IP68	Inground

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
35W	2CCT 3000K-4000K	3850lm	Black & Stainless Steel	ILAR-02341

ABBA






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Stainless steel 316	120°	IP67	Inground

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
24W	3000K	2060lm	Stainless Steel	ILAR-01197

INGROUND SYS-RD








Voltage	Body Material	Beam Angle	IP	Mounting Type
24V	Stainless Steel+PC	15° / 30°	IP68	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut-out	Housing Colour	SKU
5W	RGB + CCT	350lm	Ø100x74mm	Ø89mm	Stainless Steel	ILAR-02284
9W	RGB + CCT	700lm	Ø150x104mm	Ø138mm		ILAR-02285

Mandatory (1 unity for 360W)



SYS-T11-Channel Host Controller
ILAR-02620

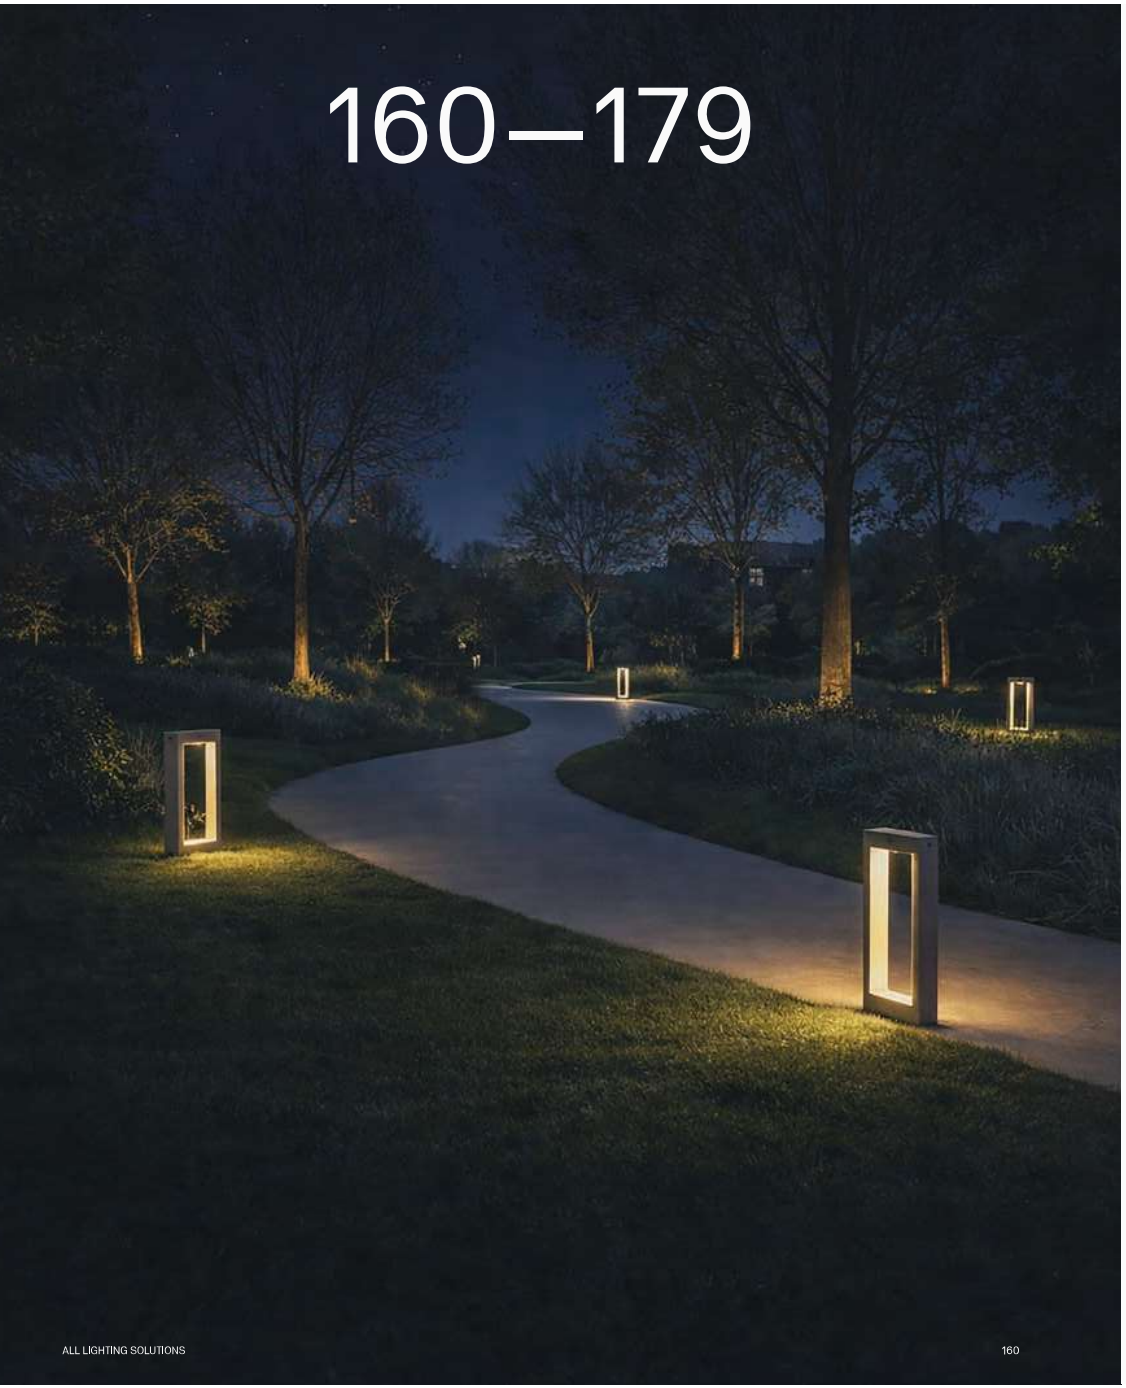


EXTERIOR

SPOTS AND BOLLARDS

LUPO








Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	360°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
8.5W	3000K	680lm	150x150mm	Matt Black	ILAR-02231
11W	3000K	880lm	200x200mm	Matt Black	ILAR-02230
15W	3000K	1325lm	300x300mm	Matt Black	ILAR-02229

GARDEN LIGHT FUTC11






Voltage	Body Material	Beam Angle	IP	Mounting Type
100-240V	Aluminium	60°	IP66	Bracket/Spike

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
12W	RGB-CCT	1100lm	Black	ILAR-01870

HAZEL






Voltage	Body Material	IP	Mounting Type
220-240V	ABS + PC	IP66	Bracket/Spike

Power	Type of Bulb	Housing Colour	SKU
MAX 7W	1x GU10	Black	ILAR-01676

*Lamps not included.

SAGE






Voltage	Body Material	IP	Mounting Type
220-240V	ABS + PC	IP66	Bracket/Spike

Power	Type of Bulb	Housing Colour	SKU
MAX 7W	1x GU10	Black	ILAR-01677

*Lamps not included.

AGAVE GU10






Voltage	Body Material	IP	Mounting Type
220-240V	Plastic	IP66	Bracket/Spike

Power	Type of Bulb	Housing Colour	SKU
MAX 7W	1x GU10	Black	ILAR-00339

*Lamps not included.

AGAVE SMD





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	120°	IP66	Bracket/Spike

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
3W	4000K	240lm	Black	ILAR-00359



SIG






Voltage	Body Material	IP	Mounting Type
100-240V	Die-casting Aluminium	IP54	Bracket

Power	Type of Bulb	Housing Colour	SKU
MAX 35W	1x GU10	Grey	ILAR-01165

*Lamps not included.

VALL II





Voltage	Body Material	IP	Mounting Type
100-265V	Aluminium	IP67	Bracket

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	Beam Angle	SKU
3W	3000K	190lm	Grey	15°	ILAR-03731
			Green RAL 6003		ILAR-03732
			Corten		ILAR-03733
8W	3000K	640lm	Grey	36°	ILAR-03540
			Green RAL 6003		ILAR-03541
			Corten		ILAR-03542

Options (Not included)



Anti-Glare Snoot - Grey
ILAR-03734 - 3W
ILAR-03774 - 8W
ILAR-03553 - 15W



Anti-Glare Snoot - Green
ILAR-03735 - 3W
ILAR-03776 - 8W
ILAR-03552 - 15W



Anti-Glare Snoot - Corten
ILAR-03736 - 3W
ILAR-03775 - 8W
ILAR-03551 - 15W



Pole with Spike/Base - Grey
ILAR-03737



Pole with Spike/Base - Green
ILAR-03738




Pole with Spike/Base - Corten
ILAR-03739



Spike
ILAR-00969

VALL





Voltage	Body Material	Beam Angle	IP	Mounting Type
100-265V	Aluminium	25°	IP67	Bracket

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
15W	3000K	1200lm	Grey	ILAR-00862
			Corten	ILAR-03549
			Green RAL 6003	ILAR-03550

Options (Not included)



Pole with Spike/Base - Grey
ILAR-03737



Pole with Spike/Base - Green
ILAR-03738



Pole with Spike/Base - Corten
ILAR-03739




Spike
ILAR-00969

PULSE








Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	70°	IP65	Surfaced with Spike/Base

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
7W	2700K	675lm	Corten	ILAR-02777
	3000K	675lm	Black	ILAR-02078

MARI






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	30°	IP65	Surface / Recessed Inground

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
6W	2700K	490lm	Dark Grey	ILAR-02773
	2700K	490lm	Corten	ILAR-02774
2x 6W	2700K	980lm	Dark Grey	ILAR-02775
	2700K	980lm	Corten	ILAR-02776



PIRI






Voltage	Body Material	Beam Angle	IP	Mounting Type
24V	Aluminum House + PMMA	110°	IP65	Recessed / Inground

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
1W	3000K	35lm	1000x16xØ45mm	Green RAL 6003	ILAR-03543
			1000x16xØ45mm	Corten	ILAR-03544
			1000x16xØ45mm	Grey	ILAR-03545
			500x16xØ45mm	Green RAL 6003	ILAR-03546
			500x16xØ45mm	Corten	ILAR-03547
			500x16xØ45mm	Grey	ILAR-03548



SHIRA





Voltage	Body Material	IP	Mounting Type
100-240V	Aluminium/Glass	IP65	Surface


Power	Type of Bulb	Housing Colour	SKU
MAX 13W	1x E27	Grey	ILAR-00874

*Lamps not included.



ALFA





Voltage	Body Material	Beam Angle	IP	Mounting Type
100-240V	Aluminium	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
13W	3000K	850lm	Grey RAL 7016	ILAR-01685




KANE



Voltage	Body Material	Beam Angle	IP	Mounting Type
100-240V	Aluminium	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
10W	2CCT 3000K-4000K	650lm	Grey RAL 7016	ILAR-01683






SLOT



Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	230°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
7W	3000K	370lm	Black	ILAR-02081






BOLLARD BERY



Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	100°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
6W	3000K	430lm	Grey	ILAR-02241






SINTRA



Voltage	Body Material	Beam Angle	IP	Mounting Type
100-240V	Aluminium	120°	IP54	Surface


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
10W	2CCT 3000K-4000K	650lm	Grey RAL 7016	ILAR-01681





TERY





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Die-casting Aluminium Opal Polycarbonate Diffuser	2x 110°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
2x 6W	3000K	1020lm	Grey Corten RAL8002	ILAR-00830 ILAR-03595



DOT





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Polypropylene body + Opal PC	120°	IP54	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
8W	4000K	600lm	Black	ILAR-01100



LIV






Voltage	Body Material	Beam Angle	IP	Mounting Type
85-265V	Aluminium	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
8W	4000K	655lm	Black RAL 9005	ILAR-01238 ILAR-00993



ARCHI





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
12W	3000K	600lm	Black	ILAR-02082
			Corten	ILAR-02778
			Dark Grey	ILAR-02784



JEDAI





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	360°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
30W	3000K	2300lm	Grey	ILAR-02147



CALY






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	360°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
12W	3000K	650lm	Grey	ILAR-00829



CIMA SLOT






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Concrete+Stainless Steel+Aluminum	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
13W	3CCT 2700K- 3300K-4000K	750lm-840lm	400x270x110mm 700x270x110mm	Cement Grey Cement Grey	ILAR-03663 ILAR-03664

CIMA CALY






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Concrete+Stainless steel+Aluminum	90°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
8W	3CCT 2700K- 3300K-4000K	430lm-465lm	Ø160x190mm Ø160x350mm	Cement Grey	ILAR-03667 ILAR-03668

CIMA NERO





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Concrete+Stainless Steel+Aluminum	60°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
9W	2700K	540lm	150x150x456mm 150x150x756mm	Cement Grey Cement Grey	ILAR-03665 ILAR-03666




UNDERWATER

LIGHT

ALL LIGHTING SOLUTIONS

UNDERWATER UW03





Voltage	Body Material	Beam Angle	IP	Mounting Type
12-24V	Stainless Steel	15°	IP68	Bracket

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
9W	RGB+CCT	600lm	Stainless Steel	ILAR-01724

POOL LIGHT






Voltage	Body Material	Beam Angle	IP	Mounting Type
12-24V	316 Stainless Steel+PC	160°	IP68	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
15W (UW01)	RGB+CCT	1100lm	Stainless Steel	ILAR-01873
27W (UW02)		2000lm		ILAR-02050


POOL LIGHT





Voltage	Body Material	Beam Angle	IP	Mounting Type
12-24V	316 Stainless Steel+PC 316 Stainless Steel+Glass	160°	IP68	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
27W (PW01)	RGB+CCT	2600lm	Stainless Steel	ILAR-02052
18W (PW02)		1800lm		ILAR-02053

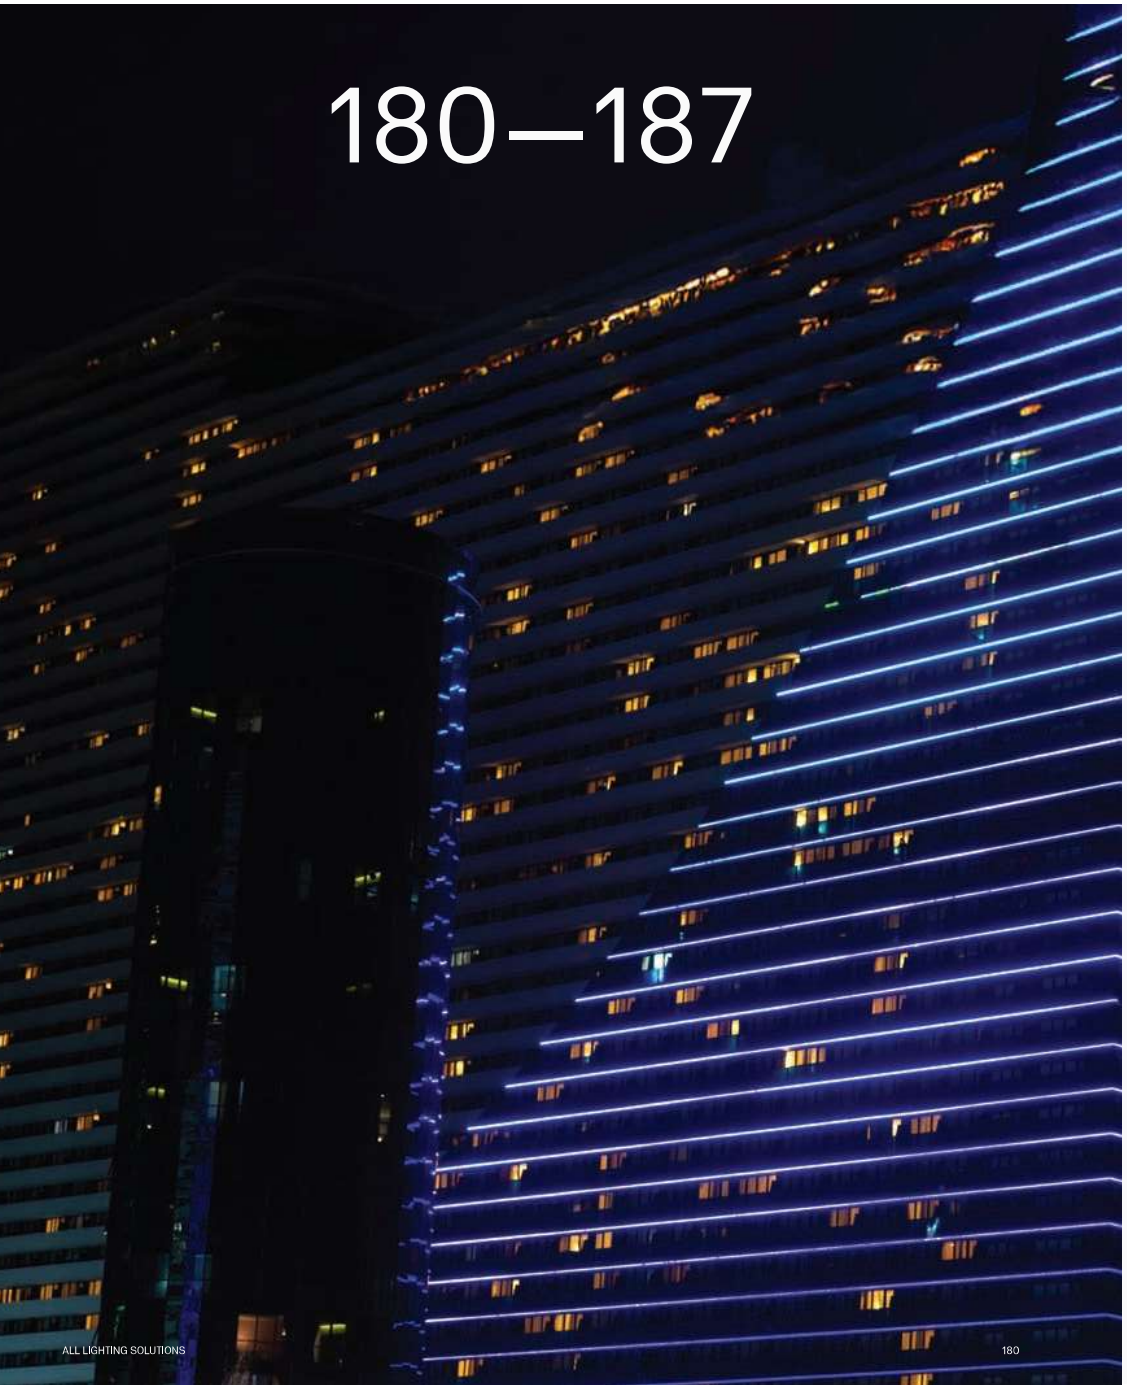


EXTERIOR

FACADE LIGHTING


GARDEN LIGHT





Voltage	Body Material	Beam Angle	IP	Mounting Type
100-240V	Aluminium	15°	IP66	Bracket/Spike

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
FUTC02	9W	RGB-CCT	900lm	Black	ILAR-01824
FUTC03	15W	RGB-CCT	1500lm	Black	ILAR-01886
FUTC05	25W	RGB-CCT	2100lm	Black	ILAR-01871

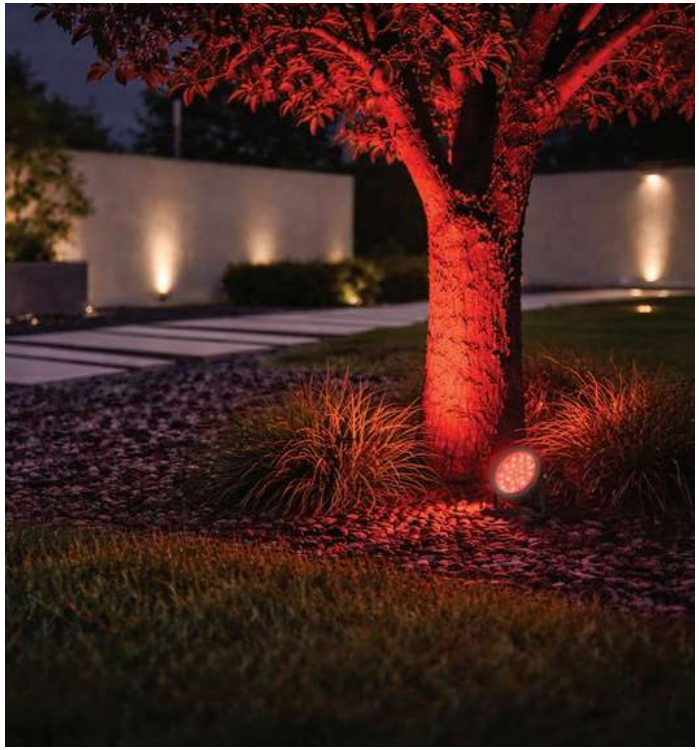

LINEAR WALL WASHER





Voltage	Body Material	Beam Angle	IP	Mounting Type
100-240V	Die Cast Aluminium	120°	IP66	Bracket/Wall

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
RL1-24	24W	RGB+CCT	1800lm	Grey	ILAR-01729
RL2-48	48W	RGB+CCT	3200lm		ILAR-01728



LINEAR WALL WASHER RL5-24







Voltage	Body Material	IP	Mounting Type
24-48V	Die Cast Aluminium	IP66	Bracket/Wall

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
24W	RGB+CCT	1600lm	Black	ILAR-02139

Options (Not included)




Connection Cable 1m
ILAR-02350



Connection Cable "T" 1m
ILAR-02351

ARC MINI






Voltage	Body Material	Beam Angle	IP	Dimmable	Mounting Type
24V	Die Cast Aluminium	Multiple	IP66	DALI/DMX	Bracket/Wall/Spike

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
6W Configurable	2200K/3000K/4000K/ 5000K/RGB/RGBW	600lm max.	Black	On-request

ARC COMBI






Voltage	Body Material	Beam Angle	IP	Dimmable	Mounting Type
220-240V	Die Cast Aluminium	Multiple	IP66	DALI/0-10V/DMX	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
10W-75W Configurable	2200K/3000K/4000K/ 5000K/RGB/RGBW	8625lm Max.	Black	On-request

ARC PRO






Voltage	Body Material	Beam Angle	IP	Dimmable	Mounting Type
220-240V	Die Cast Aluminium	Multiple	IP66	DALI/DMX	Bracket/Wall/Spike

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
35W-150W Configurable	2200K/3000K/4000K/ 5000K/RGB/RGBW	10500lm max.	Grey	On-request

ARC COLOSSUS






Voltage	Body Material	Beam Angle	IP	Dimmable	Mounting Type
220-240V	Die Cast Aluminium	Multiple	IP66	DALI/DMX	Bracket

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
100W-300W Configurable	2200K/3000K/4000K/ 5000K/RGB/RGBW	30000lm max.	Grey	On-request

ARC LINE







Voltage	Body Material	Beam Angle	IP	Dimmable	Mounting Type
220-240V	Die Cast Aluminium	Multiple	IP66	DALI/DMX	Bracked/Ceiling/Suspended

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
18W-36W Configurable	2200K/3000K/4000K/ 5000K/RGB/RGBW	3240lm Max.	Black	On-request
65W-130W Configurable	2200K/3000K/4000K/ 5000K/RGB/RGBW	11700lm Max.	Black	On-request

ARC LINE RECESSED





Voltage	Body Material	Beam Angle	IP	Dimmable	Mounting Type
220-240V 24V	Die Cast Aluminium	Multiple	IP67	DALI/DMX	Recessed


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
10W-20W Configurable	2200K/3000K/4000K/ 5000K/RGB/RGBW	2000lm Max.	325x132x102mm	Silver	On-request
20W-40W Configurable		4000lm Max.	560x132x102mm		
40W-80W Configurable		8000lm Max.	1060x132x102mm		

PILENE



Voltage	Body Material	Beam Angle	IP	Dimmable	Mounting Type
48V	Die Cast Aluminium	120°	IP66	DMX	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
3W-12W Configurable	2200K/2700K/3000K/ 4000K/ 5000K/ RGB/RGBW	1200lm max.	Silver	On-request

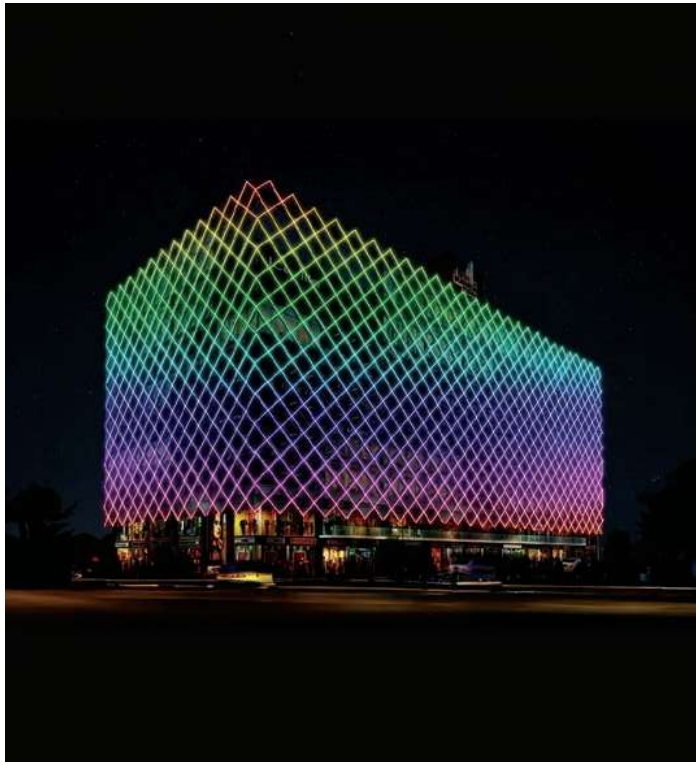




188—191

WORKLIGHT

CONSTRUCTION LIGHTING

POCKET PROJECTOR






Voltage	Body Material	Beam Angle	IP	Mounting Type
24V	Polycarbonate	120°	IP54	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Working Time	Housing Colour	SKU
10W	6500K	800lm	1.5h - 100% (800lm) 3H - 50% (400lm) 8H - 10% (80lm Top Light)	Green/Black	ILAR-02856

WORKLIGHT BOLD





Voltage	Body Material	Beam Angle	IP	Socket	Mounting Type
220-240V	Aluminium/PC	120°	IP54	230V-16A / 5m Cable	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
100W	6000K	9000lm	Green/Black	ILAR-02857

WORK LED STRIP






Voltage	Beam Angle	IP	Mounting Type
220-240V	120°	IP65	Roll / Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Cut	SKU
20W	4000K	2000lm/m	25000x10.5mm	100mm	ILAR-03746
12W	5000K	1200lm/m	50000x10.5mm	100mm	ILAR-03554


STRING PROJECTOR





Voltage	Body Material	IP	Mounting Type
220-240V	Aluminium/ABS/PC	IP54	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Battery	Working Time	Housing Colour	SKU
50W	6500K	4500lm	Li-Ion Battery 18650 3.7V 12000mAh Replaceable	2h - 100% (4500lm) 4H - 50% (2500lm) 10H - 20% (1000lm)	Green/Black	ILAR-02148

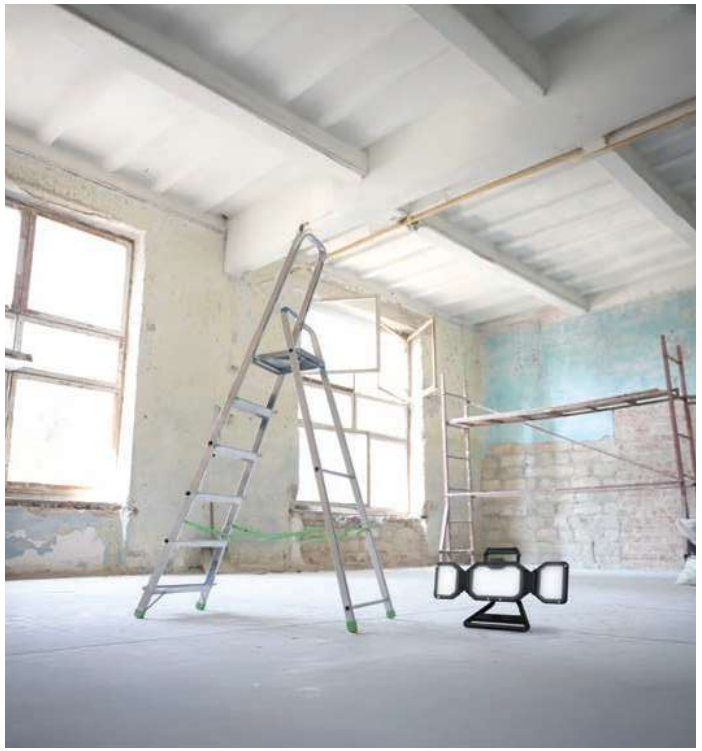



SOLAR


GARDEN

BLOK



Solar Panel	Body Material	Beam Angle	IP	Mounting Type
Monocrystalline Silicon 4.86 1.5W	ABS+PC	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
6W	4000K	1000lm	Grey	ILAR-02289






KOY



Solar Panel	Body Material	Beam Angle	IP	Mounting Type
Monocrystalline Silicon 4.86V 2W	ABS+PC	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
6W	4000K	1000lm	Grey	ILAR-02290






ZUN



Solar Panel	Body Material	Beam Angle	IP	Mounting Type
Monocrystalline Silicon 4.86 1W	ABS+PC	120°	IP65	Surface


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
6W	4000K	1000lm	Grey	ILAR-02291





MARLO





Solar Panel	Body Material	Beam Angle	IP	Mounting Type
Monocrystalline Silicon 4.86V 1.5W	ABS+PC	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
6W	4000K	1000lm	Grey	ILAR-02292




NATAN




SINGLE





QUADRUPLO





Solar Panel	Body Material	Beam Angle	IP	Mounting Type
Monocrystalline Silicon 4.32 9W	Aluminium	270°x90°	IP65	Surface


Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
Single	6W	3CCT 2700K~6500K	880lm	Black	ILAR-02298
		RGB	880lm	Black	ILAR-02299
Quadrupulo	1.5W	3CCT 2700K~6500K	220lm	Black	ILAR-02300
		RGB	220lm	Black	ILAR-02301

BIRK










Solar Panel	Body Material	Beam Angle	IP	Mounting Type
2.8W, DC5.5V Mono with tempered glass	ABS+PC, Anti-UV, V0 material for fire-proof	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
6W	4000K	800lm	Black White	ILAR-01235 ILAR-01236

FLOOD SOLAR PRO II







Body Material	Beam Angle	IP	Mounting Type
Aluminium	120°	IP65	Bracket Mounting

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
15W	3CCT 3000K-	1900lm	Black	ILAR-03002
32W	4000K-6500K	4800lm		ILAR-03003



FLOX





Solar Panel	Body Material	Beam Angle	IP	Mounting Type
0.8W Monocrystal Silicon Solar Panel	ABS+PC	90°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
1.5W	6000K	200lm	White	ILAR-00783
6.8W	6000K	800lm	White	ILAR-00784

LEO



Solar Panel	Body Material	Beam Angle	IP	Mounting Type
Polycrystalline 5V 3.5W	ABS+PC	25°	IP65	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
5W	6000K	200lm	Black	ILAR-02691

SABI



Solar Panel	Body Material	Beam Angle	IP	Mounting Type
1W / 5.5V	ABS+PC	120°	IP65	Recessed

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
1.5W	RGB+CW+WW	120lm	Black	ILAR-01931

LOTUS






Solar Panel	Body Material	Beam Angle	IP	Mounting Type
9V/3.5W Monocrystalline	6063 Aluminium PC	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
3.5W	5000K	255lm	Black	ILAR-00433



BOLLARD





Solar Panel	Body Material	Beam Angle	IP	Mounting Type
Monocrystalline Silicon 4.86 1W	Aluminum Panlite PC	120°	IP65	Surface


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
2W	3000K	100lm	Grey	ILAR-02293



MOSS








Solar Panel	Body Material	Beam Angle	IP	Mounting Type
5V/6.5W Monocrystalline	6033 Aluminium PC	360°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
3.5W	5000K	300lm	Black	ILAR-00430

PLUTO





Solar Panel	Body Material	Beam Angle	IP	Mounting Type
Monocrystalline Silicon	Aluminium	Assymetrical	IP66	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
2.5W	3000K	130lm	Grey	ILAR-03596
			Corten	ILAR-03594





Solar Panel	Body Material	Visual Distance	IP	Mounting Type
Mono crystalline 2.5V/0.25W	Aluminium alloy	>800m	IP68	Surface/Recessed



White
ILAR-02370



Green
ILAR-02371



Red
ILAR-02372



Yellow
ILAR-02373



Blue
ILAR-02374



Square Blue
ILAR-02375



Square Yellow
ILAR-02378



Recessed Yellow
ILAR-02381

PLAFON

LIGHTING

ALL LIGHTING SOLUTIONS

LIA / CALISTO / MIRANDA


LIA



Ø220-Ø280mm

CALISTO





Ø320-Ø450mm

MIRANDA





Ø460mm

Voltage	Body Material	Beam Angle	Mounting Type
220-240V	SPCC+PC	120°	Surface

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	IP	Housing Colour	SKU
LIA	18W	3CCT 3000K-4000K-6000K	1530lm	IP54	White	ILAR-03662
LIA	24W	4000K	2040lm	IP54	White	ILAR-00877
LIA	24W	3CCT 3000K-4000K-6000K	2040lm	IP54	White	ILAR-03661
CALISTO	18W	2CCT 3000K-4000K	2100lm	IP44	White	ILAR-03672
CALISTO	30W	2CCT 3000K-4000K	3600lm	IP44	White	ILAR-02130
MIRANDA	40W	3CCT 3000K-4000K-6500K	4000lm	IP44	White	ILAR-02449




LEVI / GLENDA



LEVI





280x280mm

GLENDA




375x375mm

Voltage	Body Material	Beam Angle	Mounting Type
220-240V	SPCC+PC	120°	Surface

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	IP	Housing Colour	SKU
LEVI	24W	3CCT 3000K-4000K-6000K	2040lm	IP54	White	ILAR-03628
GLENDA	32W	3CCT 3000K-4000K-6500K	3200lm	IP44	White	ILAR-02450

DÁLIA



Voltage	Body Material	Beam Angle	IP	Mounting Type
100-240V	ABS + PC	120°	IP65	Surface

Power	Type of Bulb	Size	Housing Colour	SKU
MAX 35W	2x E27	Ø300x85mm	White	ILAR-00348

*Lamps not included.

MOON

MOON






Ø300x94mm

MARS





325x235x97mm

HALF MOON






Ø300x97mm

HALF MARS






325x235x97mm

Voltage	Body Material	Beam Angle	IP	IK	Mounting Type
220-240V	ABS + PC	120°	IP66	IK10	Surface

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
Moon	15W	3CCT 3000K-4000K-5700K	1700lm	White	ILAR-01916
Mars	15W		1700lm	White	ILAR-01918
Half Moon	15W		900lm	Black	ILAR-01917
Half Mars	15W		900lm	Black	ILAR-01919

LARA






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	ABS + PC	120°	IP54	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
12W	4000K	840lm	ABS + PC	ILAR-00954

RUMU







Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	ABS + PC	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
Switch 9W/12W/16W	4CCT 3000K-4000K-5000K-6000K	2240lm	White	ILAR-02971

Options (Not included)



Round - Grey
ILAR-02975



Round - Black
ILAR-02976



Half-shade - White
ILAR-02977



Half-shade - Grey
ILAR-02978



Half-shade - Black
ILAR-02980



Dimming Microwave Sensor
ILAR-02972



Emergency Kit
ILAR-02973





INTERIOR

BATTENS


ALL LIGHTING SOLUTIONS

SEAM



Voltage	Body Material	Beam Angle	IP	Mounting Type
170-265V	ABS+PC	120°	IP40	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
24W	3CCT 3000K-	2880lm	700x168x54mm	White	ILAR-02131
50W	4000K-6500K	6000lm	1200x168x54mm		ILAR-02132






MEGASLIM

Voltage	Body Material	Beam Angle	IP	Mounting Type
200-240V	Aluminium/PVC	120°	IP20	Surface Mounted


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
20W	6000K	1600lm	600x80x24mm	White RAL 9016	ILAR-00237
40W	4500K	3200lm	1200x80x24mm		ILAR-00239
40W	6000K	3200lm	1200x80x24mm		ILAR-00240





CABINET T5 ROTABLE





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium/PVC	120°	IP20	Surface Mounted

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
8W	3CCT 3000K-	800lm	545x24x61mm	White	ILAR-03568
16W	4000K-6500K	1600lm	1134x24x61mm		ILAR-03569




T5 PRO



Voltage	Body Material	Beam Angle	IP	Mounting Type
100-240V	PVC	300°	IP20	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
4W	3000K	440lm	300x35mm	White RAL 9016	ILAR-00182
4W	4000K	440lm			ILAR-00786
4W	2CCT 3000K-4000K	440lm			ILAR-03773
8W	3000K	880lm	600x35mm		ILAR-00788
8W	4000K	880lm			ILAR-00789
8W	2CCT 3000K-4000K	880lm			ILAR-03730
18W	3000K	1980lm	1183x35mm		ILAR-00791
18W	4000K	1980lm			ILAR-00792
18W	2CCT 3000K-4000K	1980lm			ILAR-03729
22W	4000K	2420lm	1433x35mm		ILAR-00889






KAYA

Voltage	Body Material	Beam Angle	IP	Mounting Type
100-240V	PC+Aluminium Inside	120°	IP20	Surface Mounted

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
15W	4000K	1800lm	600x71,5x32mm	White RAL 9016	ILAR-00773
30W		3600lm	1200x71,5x32mm		ILAR-00774
40W		4800lm	1500x71,5x32mm		ILAR-00775








BOX T8






Voltage	Model	Body Material	IP	Mounting Type
220-240V	Double (T8)	ABS+PC	IP20	Surface

Model	Size	Housing Colour	SKU
60CM	640x165x55mm	White	ILAR-01914
120CM	1240x165x55mm		ILAR-01915
150CM	1540x165x55mm		ILAR-02532

ARMADURA T8






Voltage	Body Material	Type of Bulb	IP	Mounting Type
220-240V	Polycarbonate + SS clips	Tube T8	IP65	Surface

Size	Model	Size	Housing Colour	SKU
600mm	Single	650x75x86mm	Grey	ILAR-00260
	Double	650x120x86mm		ILAR-00261
1200mm	Single	1260x75x86mm		ILAR-00262
	Double	1260x120x86mm		ILAR-00263
1500mm	Single	1560x75x86mm		ILAR-00264
	Double	1560x120x86mm		ILAR-00265

*T8 tubes not included

RÉGUAS T8





Voltage	Body Material	Type of Bulb	IP	Mounting Type
220-240V	Aluminium/PVC	Tube T8	IP20	Surface

Max Power	Model	Model Size	Housing Colour	SKU
1x 30W	Single	600mm	White	ILAR-00270
2x 30W	Double			ILAR-00271
1x 30W	Single	1200mm		ILAR-00272
2x 30W	Double			ILAR-00273
1x 30W	Single	1500mm		ILAR-00274
2x 30W	Double			ILAR-00275

SMD





600-1200-1500mm



55mm

100mm

Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Polycarbonate	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
24W	5000K	2880lm	600x100x70mm	Grey	ILAR-01104
48W		5760lm	1200x100x70mm		ILAR-01105
56W		6720lm	1500x100x70mm		ILAR-01106



NEXOR



Voltage	Body Material	Beam Angle	IP	Mounting Type
200-240V	PC+Aluminium Inside	140°	IP65	Ceiling Mounting

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	Size	SKU
18W	4000K	2160lm	Grey	600x64x60mm	ILAR-03004
	6500K	2160lm		1200x64x60mm	ILAR-03005
36W	4000K	4320lm		1500x64x60mm	ILAR-03006
	6500K	4320lm		1200x64x60mm	ILAR-03007
48W	4000K	5760lm		1500x64x60mm	ILAR-03008
	6500K	5760lm		1500x64x60mm	ILAR-03009



600-1200-1500mm



60mm

64mm



TITAN





600-1200-1500mm



68mm

79mm

Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	ABS+PC	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
18W	3CCT 3000K-4000K-6500K	2700lm	600x79x68mm	Grey	ILAR-02133
36W - ER		5400lm	1200x79x68mm		ILAR-02135
48W - ER		7200lm	1500x79x68mm		ILAR-02137

Options (Not included)



2W Emergency KIT
180min
ILAR-02138

Dimming Sensor
ILAR-02915



Driver Xitanium 60W
300V TD16 DALI
ILDV-00458




Driver Xitanium 35W
220V TD16 DALI
ILDV-00459



INTEL TRI-PROOF







Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	PC+Aluminium inside	120°	IP66	Surface Mounted

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
15W	4000K	2250lm	600x66.5x70.5mm	White	ILAR-02437
15W	3CCT 3000K-4000K-5000K	2250lm	600x66.5x70.5mm		ILAR-03658
30W	4000K	4500lm	1200x66.5x70.5mm		ILAR-02439
30W	3CCT 3000K-4000K-5000K	4500lm	1200x66.5x70.5mm		ILAR-03657
43W	4000K	6450lm	1500x66.5x70.5mm		ILAR-02441
50W	4000K	8500lm	1500x66.5x70.5mm		ILAR-02443
15W	5000K	2250lm	600x66.5x70.5mm		ILAR-01146
30W	5000K	4500lm	1200x66.5x70.5mm		ILAR-00957
43W	5000K	6450lm	1500x66.5x70.5mm		ILAR-00958
50W	5000K	8500lm	1500x66.5x70.5mm		ILAR-01590

Options (Not included)



Microwave Sensor
White
ILAR-02445




PIR Sensor
White
ILAR-02446



Emergency Kit
White
ILAR-02447

DURA TERMAX - HIGH TEMPERATURE






Voltage	Body Material	Beam Angle	IP	Mounting Type
200-240V	Stainless Steel+Borosilicate Glass	140°	IP69K	Suspended/Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
15W	4000K	1950lm	White	ILAR-03292
35W		4550lm		ILAR-03293



DURA PRO - HACCP





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Stainless Steel+Borosilicate Glass	120°	IP69K	Suspended/Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
20W	4000K	3200lm	White	ILAR-02564
36W		5760lm		ILAR-02149
48W		7680lm		ILAR-02565



220—229


FLOODLIGHT

PROJECTORS

ALL LIGHTING SOLUTIONS

SPECTRA 3CCT






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Die Cast Aluminium	120°	IP65	Bracket Mounting

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
30W	3CCT 3000K-	3000lm	114x154x25mm	Black RAL 9005	ILAR-02888
50W	4000K-6000K	5000lm	165x221x27mm		ILAR-02889
100W		10000lm	221x279x28mm		ILAR-02890
150W		15000lm	294x380x37mm		ILAR-02891
200W		20000lm	314x406x38mm		ILAR-02892
30W	3CCT 3000K-	3000lm	114x154x25mm	White RAL 9016	ILAR-02922
50W	4000K-6000K	5000lm	165x221x27mm		ILAR-02923

SPECTRA SENSOR






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Die Cast Aluminium	120°	IP65	Bracket Mounting


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
20W	4000K	1600lm	69.8x93.8mm	Black RAL 9005	ILAR-02899
20W	6000K	1600lm			ILAR-02902
30W	4000K	2400lm	97.8x131.8mm		ILAR-02900
30W	6000K	2400lm			ILAR-02903
50W	4000K	4000lm	115.8x145.8mm		ILAR-02901
50W	6000K	4000lm			ILAR-02904
20W	4000K	1600lm	69.8x93.8mm	White RAL 9016	ILAR-02893
20W	6000K	1600lm			ILAR-02896
30W	4000K	2400lm	97.8x131.8mm		ILAR-02894
30W	6000K	2400lm			ILAR-02897
50W	4000K	4000lm	115.8x145.8mm		ILAR-02895
50W	6000K	4000lm			ILAR-02898



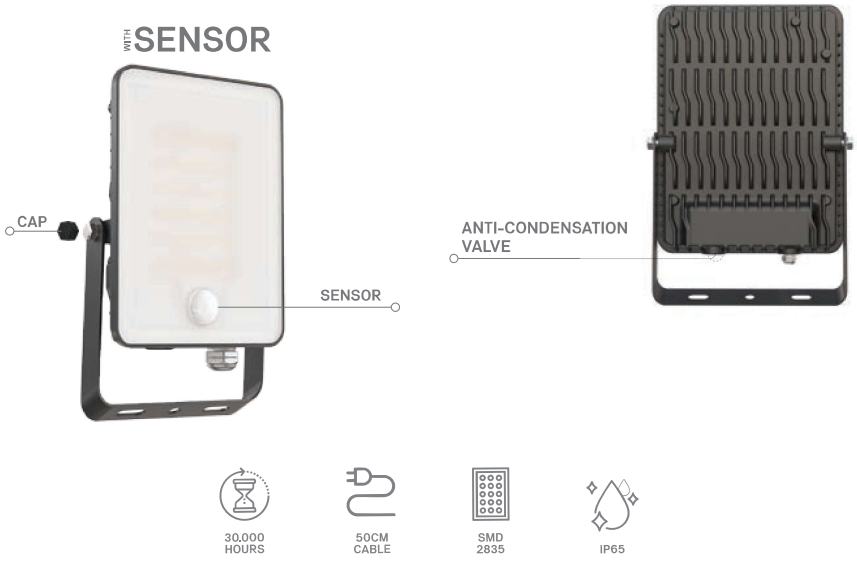

PROJECTOR SLIM






Voltage	Body Material	Bean Angle	IP	Mounting Type
220-240V	Die Cast Aluminium	120°	IP65	Bracket Mounting

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
10W	3000K	800lm	Black	ILAR-00094
10W	4000K	850lm		ILAR-01947
10W	6000K	900lm		ILAR-00126
20W	3000K	1700lm		ILAR-00392
20W	4000K	1750lm		ILAR-01948
20W	6000K	1800lm		ILAR-00127
30W	3000K	2600lm		ILAR-00393
30W	4000K	2650lm		ILAR-01949
30W	6000K	2700lm		ILAR-00128
50W	3000K	4000lm		ILAR-00394
50W	4000K	4250lm		ILAR-01950
50W	6000K	4500lm		ILAR-00129
10W	4000K	900lm	White	ILAR-00175
10W	6000K	900lm		ILAR-00174
20W	4000K	1700lm		ILAR-00532
20W	6000K	1700lm		ILAR-00176
30W	4000K	2500lm		ILAR-00535
30W	6000K	2700lm		ILAR-00177
50W	4000K	4000lm		ILAR-00538
50W	6000K	4500lm		ILAR-00178

POLYCARBONATE





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	ABS + PC	120°	IP65	Bracket Mounting

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
10W	6000K	900lm	Black	ILAR-00935
20W		1800lm		ILAR-00936
30W		2700lm		ILAR-00937
50W		4500lm		ILAR-00938

BLAZE



Voltage	Body Material	Beam Angle	IP	Mounting Type
120-277V	Die Cast Aluminium	120°	IP66	Bracket Mounting

Power Switch	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
50W-80W-100W	3CCT 3000K-	16000lm (Max.)	270x290x58mm	Grey	ILAR-02219
120W-150W-200W	4000K-5000K	32000lm (Max.)	320x328x64mm		ILAR-02220
200W-240W-300W		48000lm (Max.)	370mmx392x78mm		ILAR-02221








MASTER PRO




Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Die Cast Aluminium	Assymetrical	IP66	Bracket Mounting

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
50W	4000K	7500lm	268x228x52mm	Black	ILAR-02084
50W	5000K	7500lm			ILAR-01218
100W	3000K	15000lm	315x270x60mm		ILAR-02085
100W	5000K	15000lm			ILAR-01219
150W	5000K	22500lm	360x302x68mm		ILAR-00983
200W	5000K	30000lm	399x343x71mm		ILAR-00984
300W	5000K	45000lm	470x406x80mm		ILAR-00985






ASTRO EVO

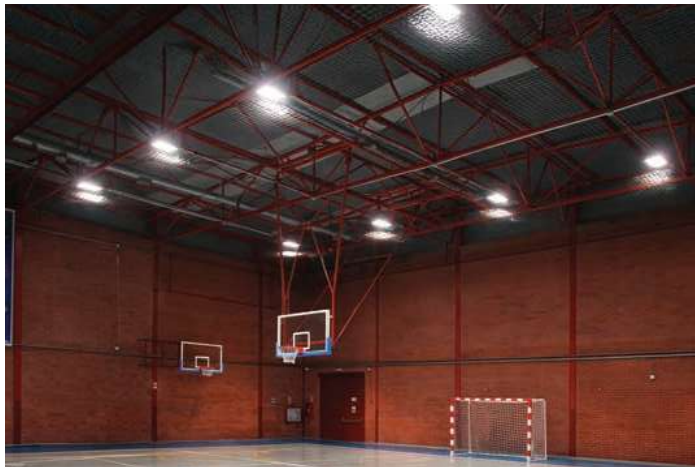






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Die Cast Aluminium	OP01 - Asy	IP66	Bracket Mounting

Power Switch	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
75W-110W-150W	2CCT 4000K-5000K	24000 lm	Black RAL 9017	ILAR-03707
100W-150W-200W	2CCT 4000K-5000K	32000 lm	Black RAL 9017	ILAR-03708

PADELITE ECO






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Die Cast Aluminium	OP01-Asy	IP66	Bracket

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
300W	4000K	48000lm	Black	ILAR-03752

PADELITE PRO







Voltage	Body Material	Beam Angle	IP	Dimmable	Mounting Type
100-240V	Die Cast Aluminium	OP01-Asy	IP66	0-10V	Bracket/Pole Mounting

Power Switch	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
240W-320W	4000K	51200lm Max.	Black	ILAR-03751

On-request

240W to 320W	3000K or 4000K or 5000K or 5700K or RGBW

Options (Not included)




Pole Mounting Adapter
On-request

TECH PRO



Size

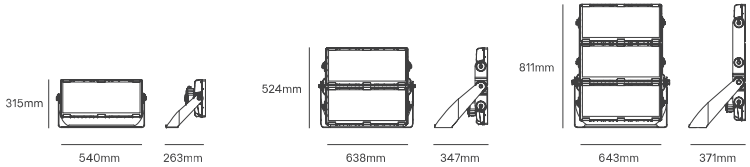

Voltage	Body Material	Dimmable	IP	Mounting Type
220-240V	Die Cast Aluminium	NO	IP66	Bracket Mounting

Power Switch	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Beam Angle	Housing Colour	SKU
400W-500W-600W	5000K	96000lm Max.	OP01-Asy	Grey	ILAR-03766
400W-500W-600W	5000K		Switch 20°-30°-40°	Grey	ILAR-03767
800W-1000W-1200W	5000K	192000lm Max.	OP01-Asy	Grey	ILAR-03768
800W-1000W-1200W	5000K		Switch 20°-30°-40°	Grey	ILAR-03769
1500W-1600W-1800W	5000K	288000lm Max.	OP01-Asy	Grey	ILAR-03770
1500W-1600W-1800W	5000K		Switch 20°-30°-40°	Grey	ILAR-03771


ULTRAMAX




Voltage	Body Material	Dimmable	IP	Mounting Type
220-240V	Die Cast Aluminium	0-10V or DALI or DMX	IP66	Bracket Mounting

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Beam Angle	Housing Colour	SKU
400W-600W	4000K or 5000K or 5700K	105000 Max.	Multiple	Grey RAL 9006	On-request
900W-1200W	4000K or 5000K or 5700K	210000 Max.	Multiple	Grey RAL 9006	On-request
1500W-1800W	4000K or 5000K or 5700K	315000 Max.	Multiple	Grey RAL 9006	On-request

TECH DIMMABLE






Voltage	Body Material	Dimmable	IP	Mounting Type
220-240V	Die Cast Aluminium	0-10V	IP66	Bracket Mounting

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Beam Angle	Size	Housing Colour	SKU
400W	5000K	52000lm	Asy	419x340x222mm	Grey	ILAR-00986
600W		78000lm	Asy	529x340x226mm		ILAR-00987
600W			30°			ILAR-01172
600W			60°			ILAR-01185

TECH II DIMÁVEL





Voltage	Body Material	Dimmable	IP	Mounting Type
220-240V	Aluminium	0-10V	IP66	Bracket Mounting

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Beam Angle	Housing Colour	SKU
250W	5000K	33750-40000lm	15°	Grey	ILAR-03053
			30°		ILAR-02981
			45°		ILAR-03054
			60°		ILAR-03055
			Asy		ILAR-03056
500W	5000K	67500-80000lm	15°		ILAR-03057
			30°		ILAR-02982
			45°		ILAR-03058
			60°		ILAR-03059
			Asy		ILAR-03060
750W	5000K	101250-120000lm	15°		ILAR-02007
			30°		ILAR-02005
			45°		ILAR-03061
			60°		ILAR-02006
			Asy		ILAR-02008
1000W	5000K	135000-160000lm	15°		ILAR-02003
			30°		ILAR-01959
			45°		ILAR-03062
			60°		ILAR-02002
			Asy		ILAR-02004



INDUSTRIAL

LIGHTING

MASTER DIMMABLE





Voltage	Body Material	Beam Angle	IP	Dimmable	Mounting Type
100-277VAC	Die-Casting Aluminum	90°	IP65	1-10V	Ceiling Mounting

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
100W	5000K	15000lm	Black RAL 9004	ILAR-01233
150W		22500lm		ILAR-01191
200W		30000lm		ILAR-01192
240W		36000lm		ILAR-01246

Options (Not included)



Ceiling Mounting
ILAR-01030




Reflector 100W/150W
ILAR-01391



Reflector 200W/240W
ILAR-01392

MASTER II 3CCT





Voltage	Body Material	Beam Angle	IP	Dimmable	Sensor	Mounting Type
100-277VAC	Die-Casting Aluminum	90°	IP65	0-10V	Optional	Ceiling Mounting

Power Switch	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
80W-120W-150W	3CCT 3000K-	12800-24000lm	Ø280x130mm	Black RAL 9004	ILAR-01960
120W-150W-200W	4000K-5000K	19200-32000lm	Ø280x130mm	Black RAL 9004	ILAR-02270

Options (Not included)



Motion and Lighting Sensor
ILAR-02628



Remote
ILAR-02629




Reflector 90° to 150W
ILAR-02158

TECH EVO





Power / CCT / Beam Angle Switch



Voltage	Body Material	Beam Angle	IP	Dimmable	Mounting Type
100-277VAC	Die-Casting Aluminum	Switch 75°-85°-115°	IP65	0-10V	Ceiling Mounting

Power Switch	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
100W-120W-150W	3CCT 3000K-4000K-5000K	27750lm Max.	Black RAL 9017	ILAR-03747
120W-150W-200W	3CCT 3000K-4000K-5000K	37000lm Max.	Black RAL 9017	ILAR-03748



COBALT





Voltage	Body Material	Beam Angle	IP	Dimmable	Sensor	Mounting Type
220-240V	Aluminum Alloy	90°	IP65	0-10V	Zhaga (Optional)	Loop Hanging/Ceiling Mounting

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
150W	3CCT 3000K-4000K-5000K	27000lm	Ral 9007 Grey	ILAR-02205

TECH






Voltage	Body Material	Beam Angle	Dimming	IP	Mounting Type
220-277VAC	Aluminum Alloy	90°	(0-10V)	IP65	Ceiling Mounting

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	Size	SKU
150W	5000K	24000lm	Black	Ø298x167mm	ILAR-01044
200W		32000lm		Ø364x166mm	ILAR-01045

DOB ECO






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminum Alloy	120°	IP65	Suspended

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
150W	5000K	18000lm	Black	ILAR-01046
200W		24000lm		ILAR-01644

FORGE HIGH TEMPERATURE (70°C)






Voltage	Body Material	Beam Angle	IP	Dimmable	Mounting Type
120-277V	Aluminum Alloy	120°	IP66	0-10V	Ceiling Mounting

Power Switch	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	Size	SKU
100W-120W-140W-160W-180W-200W	4000K	37000lm	Black	Ø400x184mm	ILAR-03624

SIRIUS








Body Material	Beam Angle	IP	Mounting Type
Aluminium	110°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
40W	4000K	5400lm	Black	ILAR-00709
	5000K	5400lm		ILAR-00514
80W	4000K	10800lm	Black	ILAR-00851
	5000K	10800lm		ILAR-00515
	3CCT 3000K-4000K-5000K	10800lm		ILAR-01935



LINEAR LUMIA





Voltage	Body Material	Beam Angle	Dimming	IP	Mounting Type
100-277VAC	Aluminum Alloy	60°x110°	(0-10V)	IP66	Suspended/Bracket

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	Size	SKU
150W	5000K	24000lm	White	892x105x79mm	ILAR-02152
200W		32000lm		1192x105x79mm	ILAR-02153

Options (Not included)




Suspension Kit 1.1m	Adjustable Wall Bracket	Lens 90x110°	Lens Double Side 25°
ILAR-02154	ILAR-02155	ILAR-02156	ILAR-02157

ACCESSORIES

		Housing Colour	Body Material	SKU
	Emergency Kit for High Bay	White	Aluminium	ILEM-00032
	Remote Controller for High Bay Emergency Kit	Grey	Aluminium	ILEM-00046
	Ceiling Mounting			On-request
	Conversor 1-10V para DALI IP65			ILAR-01379

GAS STATION PRO





Voltage	Body Material	Beam Angle	IP	Mounting Type
120-277V	Aluminium	90°	IP66	Recessed


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
100W	5000K	15000lm	White	ILAR-03647

Options (Not included)



Recessed Springs	Surface Kit	Recessed Frame	Recessed Bracket
ILAR-03648	ILAR-03649	ILAR-03650	ILAR-03651



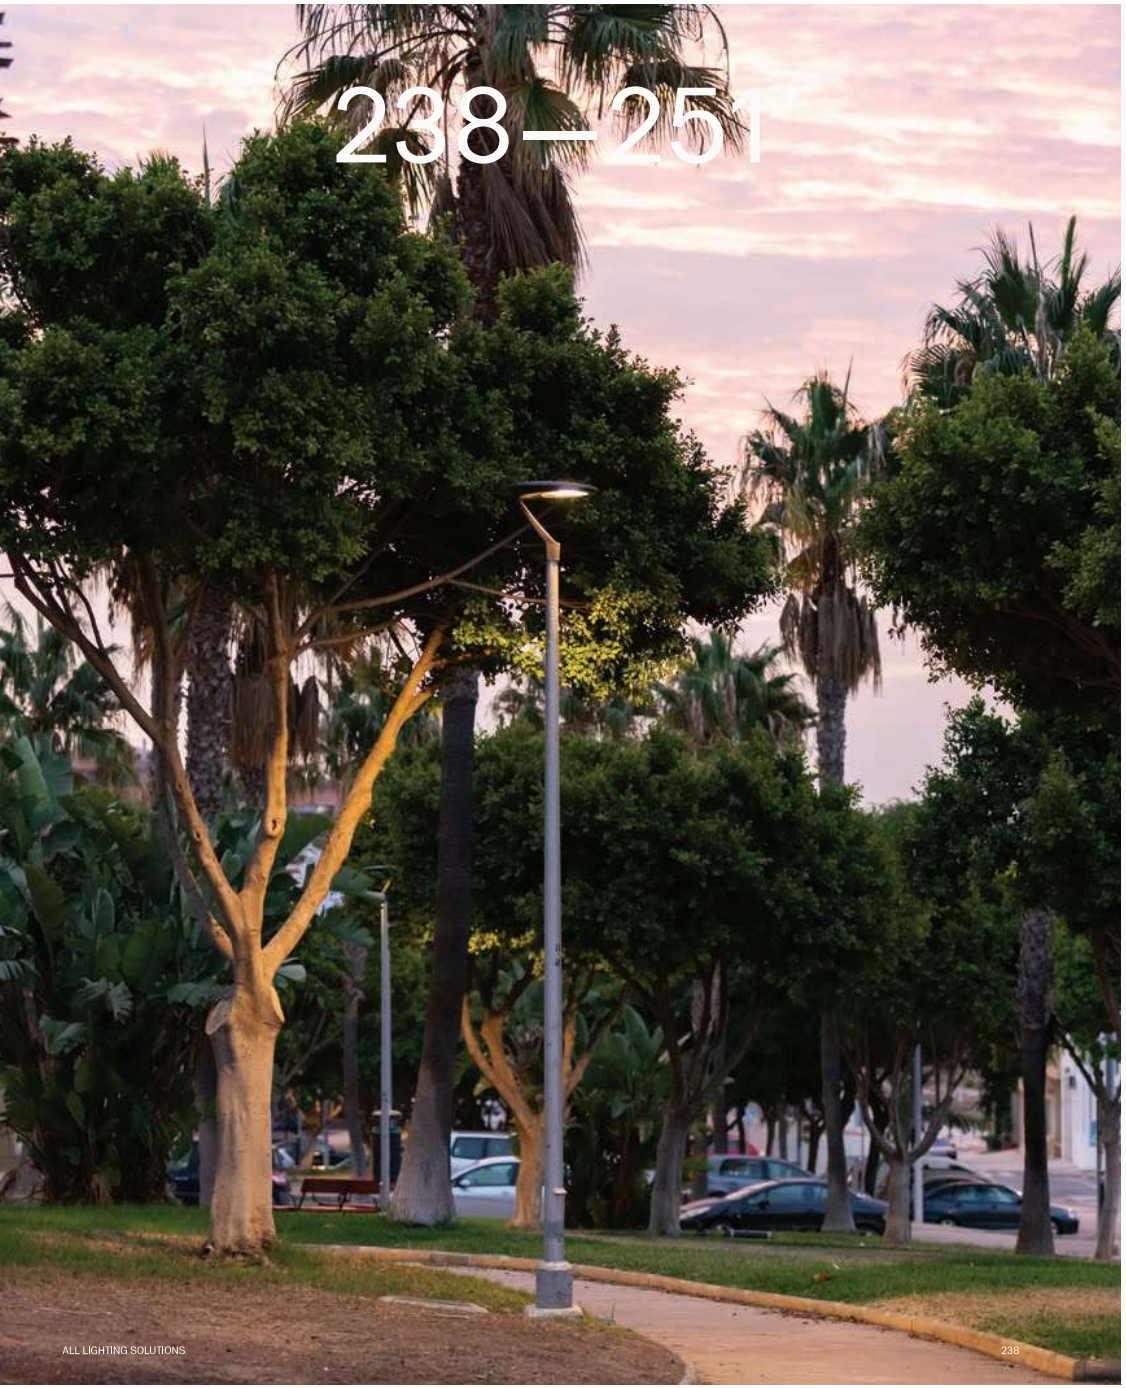

STREET


LIGHT


ALL LIGHTING SOLUTIONS

VERSATILE











Voltage	Body Material	Beam Angle	Dimmable	IP	Mounting Type
220-240V	Die Cast Aluminium	Asymmetric	1-10V	IP66	Side Entry/Post Top

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
60W	3CCT 3000K	9600lm	Grey RAL 9006	ILAR-02579
75W	4000K-5000K	12000lm		ILAR-02580
100W		16000lm		ILAR-02581
120W		19200lm		ILAR-02582

On-request

10W to 230W	2700K or 3000K or 4000K or 5000K	1-10V or DALI	Zhaga or NEMA

Options (Not included)



Wall Holder 45° -
Antracite - 250xØ60mm
ILAR-01091



Wall Holder 45° -
Grey - 250xØ60mm
ILAR-01202




Articulated Adapter
Grey - Ø60xØ47mm
ILAR-02027



Corner Holder
Grey - Ø60mm
ILAR-01117

NEXA





Voltage	Body Material	Beam Angle	Dimmable	IP	Mounting Type
220-240V	Die Cast Aluminium	120°	Optional	IP66	Side Entry/Post Top

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
50W	3CCT 3000K	7000lm	Grey RAL 9006	ILAR-03294
100W	4000K-5000K	14000lm		ILAR-03295
150W		21000lm		ILAR-03296

Options (Not included)



Wall Holder 45° -
Antracite - 250xØ60mm
ILAR-01091



Wall Holder 45° -
Grey - 250xØ60mm
ILAR-01202



Articulated Adapter
Grey - Ø60xØ47mm
ILAR-02027




Corner Holder
Grey - Ø60mm
ILAR-01117



ZINI





Voltage	Body Material	Beam Angle	Dimmable	IP	Mounting Type
100-240V	Die Cast Aluminium	Asymmetric	NO	IP66	Side Entry/Post Top

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
30W	4000K	4800lm	Grey	ILAR-02120
50W		8000lm		ILAR-02324
100W		16000lm		ILAR-02325

On-request

30W to 100W	2700K or 3000K or 4000K or 5000K

Options (Not included)



Wall Holder 45° -
Antracite - 250x060mm
ILAR-01091



Wall Holder 45° -
Grey - 250x060mm
ILAR-01202



Articulated Adapter
Grey - Ø60xØ47mm
ILAR-02027




Corner Holder
Grey - Ø60mm
ILAR-01117



ARIES







Voltage	Body Material	Beam Angle	Dimmable	IP	Mounting Type
220-240V	Aluminium	120°	NO	IP65	Side Entry/Post Top

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
60W	4000K	7200lm	Grey	ILAR-00245
100W		12000lm		ILAR-01009
150W		18000lm		ILAR-01188

Options (Not included)



Wall Holder 45° -
Antracite - 250x060mm
ILAR-01091



Wall Holder 45° -
Grey - 250x060mm
ILAR-01202




Articulated Adapter
Grey - Ø60xØ47mm
ILAR-02027



Corner Holder
Grey - Ø60mm
ILAR-01117

EXCELSIOR






Voltage	Body Material	Beam Angle	IP	Dimmable	Mounting Type
220-240V	High Purity Aluminum	Multiple	IP67(OB)/IP66	1-10V/ DALI / D4i	Side Entry/Post Top

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
10W-320W Configurable	3000K/4000K/5000K/6000K	1800-57600lm	5 Dimensions	Multiple	On-request

ORBIT





Voltage	Body Material	Beam Angle	Dimmable	IP	Mounting Type
220-240V	Die Cast Aluminium	Multiple	1-10V/ DALI / D4i	IP66	Post Top

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
20W-100W Configurable	2700K/3000K/4000K	15000lm	Multiple	On-request

BALLON





Voltage	Body Material	Beam Angle	Dimmable	IP	Mounting Type
220-240V	Die Cast Aluminium+PC	Multiple	NO	IP65	Post top

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
20W-50W Configurable	2700K/3000K/4000K	-	Ø400xmm Ø450xmm	Black	On-request On-request

LUCCI






Voltage	Body Material	Beam Angle	Dimmable	IP	Mounting Type
220-240V	Die Cast Aluminium	Multiple	1-10V/ DALI / D4i	IP66	Multiple

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
30W-120W Configurable	3000K/4000K/5000K	4500lm-18000lm	700x200x100mm	Black	On-request
30W-120W Configurable	3000K/4000K/5000K	4500lm-18000lm	900x200x100mm	Black	On-request
150W-240W Configurable	3000K/4000K/5000K	22500lm-36000lm	1250x200x100mm	Black	On-request



VILLA





Voltage	Body Material	Beam Angle	Dimmable	IP	Mounting Type
100-240V	Die Cast Aluminium	Multiple	Optional	IP66	Post Top

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
30W-100W Configurable	3000K/4000K/5000K	4500lm-15000lm	445x855mm	Black	On-request

FERNANDINA





Voltage	Body Material	Beam Angle	Dimmable	IP	Mounting Type
100-240V	Die Cast Aluminium+PC	Multiple	Optional	IP66	Post top

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
30W-100W Configurable	3000K/4000K/5000K	4200lm-14000lm	495x945mm	Black	On-request

RETROFIT KIT






Voltage	Body Material	Beam Angle	Dimmable	IP
220-240V	Die Cast Aluminium	Multiple	Optional	IP66/IP67

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
20W to 50W Configurable	3000K/4000K/5000K	7500lm Max.	Multiple	Black or Grey	On-request

CONVERT







Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Die Cast Aluminium	OP04	IP66	Side Entry/Post Top

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
Switch 18W-30W-40W-60W	3CCT 3000K 4000K-5000K	9000lm	Black RAL 9005	ILAR-02098

On-request

10W to 150W	2700K or 3000K or 4000K or 5000K	1-10V or DALI	Zhaga or NEMA

Options (Not included)

Side Entry Mounting (Rotable)
ILAR-02106



Single Arm Post Top
ILAR-02107




Double Arm Post Top
ILAR-02108



Straight Arm Bracket
ILAR-02099

URBAN DESIGN II






Voltage	Body Material	Beam Angle	Dimmable	IP	Mounting Type
220-240V	Die Cast Aluminium	Multiple	-	IP66	Post Top

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
40W	4000K 5000K	5200lm	Black RAL 9004	ILAR-01661 ILAR-01070

On-request


20W to 100W	2700K or 3000K or 4000K or 5000K	1-10V or DALI	Zhaga or NEMA

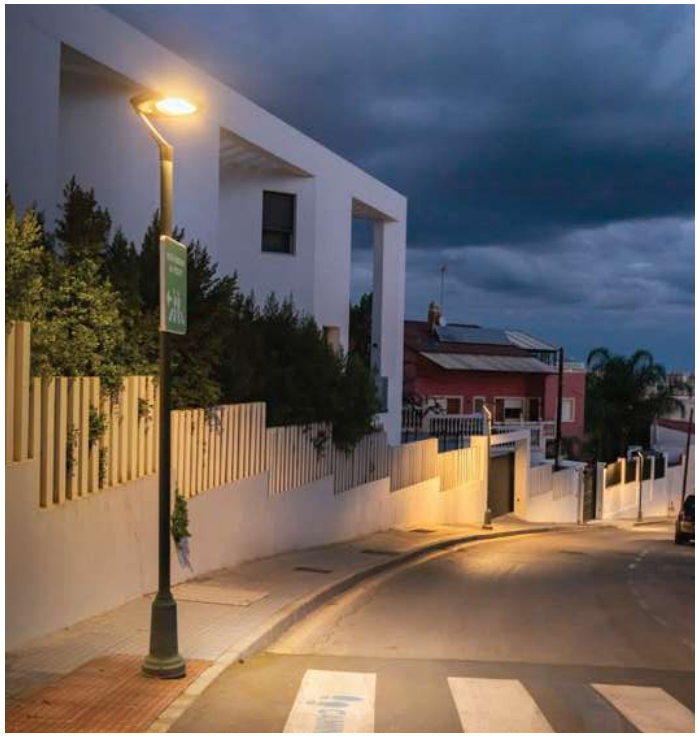

URBAN PRO







Voltage	Body Material	Beam Angle	Dimmable	IP	Mounting Type
100-277V	Die Cast Aluminium	120°	-	IP66	Post Top


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
Switch 30W-40W-50W	3CCT 3000K 4000K-5000K	8000lm	Black RAL 9004	ILAR-02271

On-request

30W to 150W	2700K or 3000K or 4000K or 5000K	1-10V or DALI	Zhaga or NEMA

URBAN EMMA





Voltage	Body Material	Beam Angle	Dimmable	IP	Mounting Type
100-277V	Die Cast Aluminium	120°	-	IP66	Side Entry/Post Top

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
Switch 18W-30W-40W-60W	3CCT 3000K 4000K-5000K	8400lm	Black RAL 9017	ILAR-02097

On-request


20W to 60W	2700K or 3000K or 4000K or 5000K	1-10V or DALI	Zhaga or NEMA



URBAN ECO







Voltage	Body Material	Beam Angle	Dimmable	IP	Mounting Type
100-277V	Die Cast Aluminium	120°	NO	IP65	Side Entry/Post Top

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	SKU
35W	3CCT 3000K 4000K-5000K	4830lm	Black RAL 9004	ILAR-01074




SOLAR

STREET LIGHTING

LEAN SOLAR






Body Material	Beam Angle	IP	Mounting Type
ABS+PC, Aluminum, Anti-UV	140x70° - TPIII	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	Charging Time	SKU
15W	4000K	2250lm	Black	8-10hrs strong sunshine to fully charge	ILAR-01801
40W		4800lm			ILAR-01802



SQUARE SOLAR






Body Material	Beam Angle	IP	Mounting Type
Die Cast Aluminium	OP01	IP66	Side Entry/Post Top

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	Charging Time	SKU
40W	4000K	5700lm	Black	-	ILAR-03517

HEKOS SOLAR





Body Material	Beam Angle	IP	Mounting Type
Die Cast Aluminium	OP01	IP65	Side Entry/Post Top

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	Charging Time	SKU
40W	4000K	6500lm	Grey	-	ILAR-03509
60W		8500lm			ILAR-03510
80W		12000lm			ILAR-03511


Options (Not included)



Remote Hekos Solar
ILAR-03515

TABITI SOLAR





Body Material	Beam Angle	IP	Mounting Type
Die Cast Aluminium	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	Charging Time	SKU
20W	2CCT 3000K + 5700K	3000lm	Black	7H	ILAR-03505
35W		6000lm			ILAR-03506
50W		9000lm			ILAR-03507




ATEX

LIGHTING

ALL LIGHTING SOLUTIONS

ATEX LINEARTOP





Voltage	Body Material	Beam Angle	Zone	IP	Mounting Type
100-277V	Aluminum Alloy (ADC12)	120°	1/21/22	IP66	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Housing Colour	Size	SKU
20W	5000K	2800lm	Grey RAL 9006	30cm	ILAR-02850
30W		4200lm		60cm	ILAR-02851
40W		5600lm		120cm	ILAR-02852
60W		8400lm		120cm	ILAR-02853
80W		11200lm		120cm	ILAR-02854

Options (Not included)



Atex Junction Box
(4x M20x1.5) IP65
ILAR-03156



Atex Cable Gland
(M20x1.5) IP65
ILAR-03157



ATEX HIGHTOP





Voltage	Body Material	Beam Angle	Zone	IP	Dimmable	Mounting Type
200-250V	Die Cast Aluminium	90°	1/21/22	IP66	0-10V	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
100W	5000K	14000lm	Ø370x197mm	Grey	ILAR-02015
120W	4000K	21000lm			ILAR-02521
120W	5000K	16800lm			ILAR-02118
150W	5000K	21000lm			ILAR-02207
200W	5000K	28000lm			ILAR-02016

Options (Not included)




Grill for Hightop (IK10)
ILAR-02019



ATEX EMERGENCY






Voltage	Body Material	Beam Angle	IP	Mounting Type
110V - 277V	Die Cast Aluminium	120°	IP66	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
5W	6000K	400lm	476x199x98mm	Grey	ILEM-00048

ATEX FLOODTOP








Options (Not included)

Grill for Floodtop (IK10)
ILAR-02017

Voltage	Body Material	Beam Angle	Zone	IP	Dimmable	Mounting Type
200-250V	Die Cast Aluminium	90°	1/21/22	IP66	0-10V	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
80W	5000K	11200lm	320x261x240mm	Grey	ILAR-02368
150W	4000K	21000lm			ILAR-02641
150W	5000K	21000lm			ILAR-02014
200W	5000K	28000lm			ILAR-02208

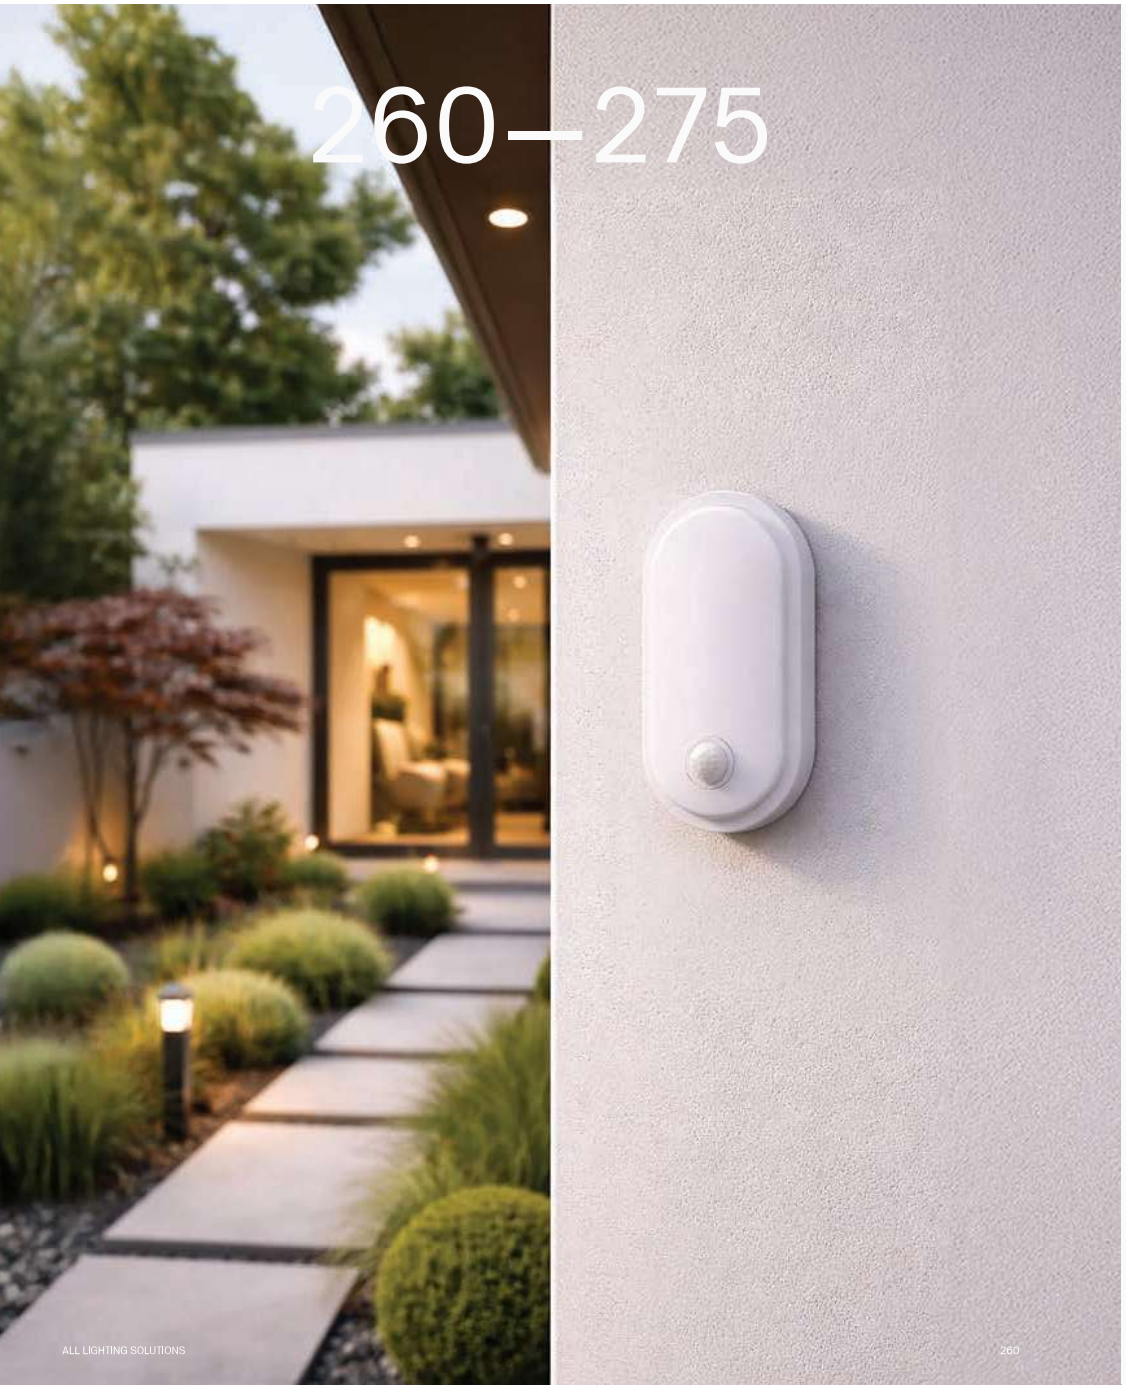


MOTION DETECTORS

SENSORS

ST02






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	160°	IP20	Infrared	No	Recessed

Rated Load	Detection Distance	Installation Height	Installation	Size	Cut-out	SKU
500W	4-9m	1-1.8m	Wall	80x80x24.7mm	48.5x48.5mm	ILAR-00118

ST31






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	190°	IP20	Infrared	No	Recessed

Rated Load	Detection Distance	Installation Height	Installation	Size	Cut-out	SKU
500W	4-9m	1-1.8m	Wall	80x80x33.1mm	48x48mm	ILAR-00495

ST31C





Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	190°	IP20	Infrared	No	Recessed

Rated Load	Detection Distance	Installation Height	Installation	Size	Cut-out	SKU
500W	10m max	1-1.8m	Wall	80x80x59.1mm	50x50mm	ILAR-01059

ST32






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	160°	IP20	Infrared	No	Recessed

Rated Load	Detection Distance	Installation Height	Installation	Size	Cut-out	SKU
500W	9m	1-1.8m	Wall	80x80x33.1mm	48x48mm	ILAR-00258

ST754




Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	180°	IP20	Micro-ondas	No	Recessed

Rated Load	Detection Distance	Installation Height	Installation	Size	Cut-out	SKU
1200W	5-15m	1-1.8m	Wall	80x80x32mm	50x50mm	ILAR-00305

ST11






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	180°	IP44	Infrared	No	Surface

Rated Load	Detection Distance	Installation Height	Installation	Size	SKU
800W	12m	1.8-2.5m	Wall	80.2x55.5x68.2mm	ILAR-00257

MOTION SENSOR








Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	180°/360°	IP44	Infrared	No	Surface

Rated Load	Detection Distance	Installation Height	Installation	Size	Colour	SKU
1200W	12m	1.8-2.5m	Wall	80.2x68.2x55.5mm	White	ILAR-03577
					All Black	ILAR-03578

ST09





Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	180°	IP44	Infrared	No	Surface

Rated Load	Detection Distance	Installation Height	Installation	Size	SKU
1200W	12m	1.8-2.5m	Wall	84.4x60.4mm	ILAR-00121

ST18B






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	240°	IP65	Infrared	No	Surface / Corner

Rated Load	Detection Distance	Installation Height	Installation	Size	SKU
1200W	8m	1.8-2.5m	Wall	125.2x72.7x71.4mm	ILAR-01061

AR18X






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	240°	IP65	Infrared	No	Surface

Rated Load	Detection Distance	Installation Height	Installation	Size	Colour	SKU
2000W	8-14m	1.8-2.5m	Wall	100.3x75x62mm	White Black	ILAR-02882 ILAR-02883

ST15






Voltage	IP	Type	Dimming	Mounting Type
220-240V	IP65	Infrared	No	Surface

Rated Load	Detection Distance	Installation Height	Installation	Size	Detection Angle	Colour	SKU
1200W	12m	1.8-2.5m	Wall	117.2x80x51.5mm	180° 180° 180°/360°	White All Black White	ILAR-00304 ILAR-02589 ILAR-00570

ST701E






Voltage	Beam Angle	IP	Type	Dimming	Mounting Type
220-240V	180°/360°	IP20	Microwave	No	Surface

Rated Load	Detection Distance	Installation Height	Installation	Size	SKU
1200W	5-15m Wall 1-8m Ceiling	1.5-3.5m Wall 2-8m Ceiling	Wall/Ceiling	36.8x55.4x25.5mm	ILAR-00124

MICROWAVE / PRESENCE






Voltage	Beam Angle	IP	Type	Dimming	Mounting Type
110-240V	180°/360°	IP20	Microwave / Presence	No	Surface

Rated Load	Detection Distance	Installation Height	Installation	Size	SKU
1200W (220V) 600W (110V)	6m Wall 1-4m Ceiling	1.2-5m Wall 2-4m Ceiling	Wall/Ceiling	93x77.9x45x24.5mm	ILAR-03572

SENSOR PHOTOCELL






Voltage	IP	Type	Mounting Type
220-240V	IP65	Light-control Sensor	Surface

Rated Load	Ambient Lighting	Size	SKU
20A 15A	<2-100LUX	90x66x35mm 48.8x27.3x63.4 / 47.9x42.1x28.8m	ILAR-03579 ILAR-03580

ST24 DIP SWITCH





Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	120°/360°	IP20	Infrared	No	Surface

Rated Load	Detection Distance	Installation Height	Installation	Size	SKU
800W	3-6m	1.5-3.5m Wall 2-8m Ceiling	Wall/Ceiling	55.4x25.5x36.8mm	ILAR-00519

ST302



Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP44	Twilight	No	Surface

Rated Load	Installation Height	Installation	Size	SKU
10A	1.5-5m	Wall	Ø63x76.7mm	ILAR-00520

ST330 1-10V





Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP20	Light Sensor	Yes	Surface


Dimming	Installation Height	Installation	Size	SKU
1%-100%	1.5-5m	False Ceiling	38x69mm	ILAR-00606

ST40










Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP20	Infrared	No	Recessed

Rated Load	Detection Distance	Installation Height	Installation	Size	Cut-out	Colour	SKU
800W	8m	2.2-4m	False Ceiling	Ø81.2x65.1mm	Ø54mm	White	ILAR-01179
						Black	ILAR-01956
						All Black	ILAR-02591

ST41








Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP20	Infrared	No	Recessed

Rated Load	Detection Distance	Installation Height	Installation	Size	Cut-out	Colour	SKU
1200W	6m	2.2-4m	False Ceiling	Ø76x75.6mm	Ø61.5mm	White	ILAR-00120
						All Black	ILAR-02592

AR41








Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP54	Infrared/Presence	No	Recessed

Rated Load	Detection Distance	Installation Height	Installation	Size	Cut-out	Colour	SKU
1200W	6m Presence 20m Motion	2.2-6m	False Ceiling	Ø87.3x87.3mm	Ø63-66mm	White	ILAR-02880
						All Black	ILAR-02881

ST753








Voltage	Detection Angle	IP	Type	Type	Dimming	Mounting Type
110-240V	360°	IP65	Microwave/Presence	Microwave	No	Recessed

Rated Load	Detection Distance	Installation Height	Installation	Size	Cut-out	Colour	SKU
2000W	6m	2-4m	False Ceiling	Ø76x66.2mm	Ø63-66mm	White	ILAR-02159
				76x76x66.2mm		White	ILAR-02795

ST40A








Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP20	Infrared	No	Recessed

Rated Load	Detection Distance	Installation Height	Installation	Size	Cut-out	Colour	SKU
800W	8m	2.2m-4m	False Ceiling	Ø50x62mm	Ø40mm	White	ILAR-02054
						Black	ILAR-03728

ST331 1-10V






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP20	Infrared	No	Recessed

Dimming	Detection Distance	Installation Height	Installation	Size	Cut-out	SKU
1%-100%	1.8-4m	2.2m-4m	False Ceiling	Ø43x43.3x34mm	Ø33mm	ILAR-01865

ST41H








Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP20	Infrared	No	Recessed

Rated Load	Detection Distance	Installation Height	Installation	Size	Cut-out	SKU
1200	8m	1.8m-4m	False Ceiling	Ø76x49mm	Ø61.5x44mm	ILAR-02031
				76x76x49mm	Ø61.5x44mm	ILAR-02794

INFRARED PRESENCE SENSOR






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
110-240V	360°	IP54	Infrared/Presence	No	Recessed

Rated Load	Detection Distance	Installation Height	Installation	Size	Cut-out	SKU
2000W	2-6m	2.2-4m	False Ceiling	Ø76x71.36x66.36x61.50mm	Ø63x66mm	ILAR-03573

LONG RANGE






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP44	Infrared	No	Surface/Recessed

Rated Load	Detection Distance	Installation Height	Installation	Size	Cut-out	SKU
2000W	8m	4-12m	False Ceiling	Ø111.5x62.5mm	Ø57x80mm	ILAR-03576

ST42C






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP20	Infrared	No	Recessed

Rated Load	Detection Distance	Installation Height	Installation	Size	Cut-out	SKU
2000W	20m	2.2-6m	False Ceiling	Ø100x92x56.2mm	Ø76mm	ILAR-02451

ST05DA3 DALI






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP54	Infrared/DALI	No	Recessed

Rated Load	Detection Distance	Installation Height	Output	Installation	Size	Cut-out	SKU
2000W	20m	2.2-6m	CH1-CH2	False Ceiling	Ø102x88.6mm	Ø55mm	ILAR-02287

ST05DA1 DALI



Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP54	Infrared/DALI	DALI	Surface

Rated Load	Detection Distance	Installation Height	Output	Installation	Size	SKU
2000W	12m	2.2-4m	CH1-CH2	Ceiling	Ø102x51.7mm	ILAR-02286

ST759






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP65	Microwave	DALI	Surface

Rated Load	Detection Distance	Installation Height	Installation	Size	SKU
2000W	8-20	4-15m	Industry/Garages	Ø71.5x59mm	ILAR-00521 ILAR-02056 ILAR-02057 ILAR-00522

LONG RANGE






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP65	Infrared	No	Surface

Rated Load	Detection Distance	Installation Height	Installation	Size	SKU
2000W	20m	2.2-6m	Ceiling	102.5x58.8mm	ILAR-01866

ST05A





Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP44	Infrared	No	Surface

Rated Load	Detection Distance	Installation Height	Installation	Size	SKU
1200W	6m	2.2-4m	Ceiling	Ø80x41mm	ILAR-00119

MICROWAVE PRESENCE






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
110-240V	360°	IP20	Microwave/Presence	No	Surface

Rated Load	Detection Distance	Installation Height	Installation	Size	SKU
2000W	6m	2-4m	Ceiling	Ø115x22.5mm	ILAR-02162

MICROWAVE LONG RANGE






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
110-240V	360°	IP20	Microwave	No	Surface

Rated Load	Detection Distance	Installation Height	Installation	Size	SKU
2000W	8m	4-15m	Ceiling	Ø115x22.5mm	ILAR-03575

INFRARED PRESENCE





Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
110-240V	360°	IP20	Infrared/Presence	No	Surface


Rated Load	Detection Distance	Installation Height	Installation	Size	SKU
2000W	6m	2-4m	Ceiling	Ø115x22.5mm	ILAR-03574

INFRARED










Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP20	Infrared	No	Surface

Rated Load	Detection Distance	Installation Height	Installation	Size	Colour	SKU
2000W	6m	2.2-4m	Ceiling	Ø115x24.3mm	White	ILAR-00259
					Black	ILAR-01957
					All Black	ILAR-02590

ST05L




Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP65	Infrared	No	Surface

Rated Load	Detection Distance	Installation Height	Installation	Size	SKU
2000W	8m	2.2-4m	Ceiling	Ø110x27mm	ILAR-01545

AR46X/G







Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP20	Infrared/Presence	No	Surface

Rated Load	Detection Distance	Installation Height	Installation	Size	Colour	SKU
2000W	6m Presence 20m Motion	2.2-6m	Ceiling	Ø83x49.5mm	White	ILAR-02878
					Black	ILAR-02879

ST07B






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP20	Infrared	No	Surface

Rated Load	Detection Distance	Installation Height	Installation	Size	SKU
2000W	30m	2.2m-4m	Ceiling	Ø103x53.5mm	ILAR-02125

ST705A





Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
110-240V	360°	IP44	Infrared	No	Surface

Power	Detection Distance	Installation Height	Installation Type	Size	SKU
1x E27 (60W max)	2-4m	2-4m	Ceiling	Ø300x112mm	ILAR-00123

LED PANEL WITH SENSOR





Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	120°/360°	IP20	Infrared	No	Surface Wall/Ceiling

Power	Color Temperature (CCT)	Total Luminous Flux (±5%)	Detection Distance	Installation Height	Size	SKU
Switch 10W/15W/18W	3CCT 3000K-4000K-6000K	1300lm	8m Wall 6m Ceiling	1.8-2.5m Wall 2.2-4m Ceiling	Ø230.7x19mm	ILAR-01868

PLAFON WITH SENSOR





Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	120°/360°	IP65	Infrared	No	Surface

Power	Color Temperature (CCT)	Total Luminous Flux (±5%)	Detection Distance	Installation Height	Size	SKU
20W	3000K 4000K	2500lm	8m	2-4m	Ø300x40mm	ILAR-01668 ILAR-01062

LUMINAIRE WITH SENSOR






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP20	Infrared	No	Surface

Power	Color Temperature (CCT)	Total Luminous Flux (±5%)	Detection Distance	Installation Height	Size	Battery	SKU
16W 16W (Emergency)	4000K 4000K	1150lm	6m	2-4m	Ø290x60mm	NO 5H - 65lm	ILAR-00306 ILAR-01679

PLAFON WITH SENSOR






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP54	Infrared	No	Surface

Power	Color Temperature (CCT)	Total Luminous Flux (±5%)	Detection Distance	Installation Height	Size	SKU
15W	4000K	1300lm	6m	2.2-4m	Ø260x49.4mm	ILAR-03570

WALL LUMINAIRE WITH SENSOR






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	140°	IP65	Infrared	No	Surface Wall

Power	Color Temperature (CCT)	Total Luminous Flux (±5%)	Detection Distance	Installation Height	Size	SKU
Switch 10W/15W/18W	3CCT 3000K-4000K-6000K	1900lm	9m	1.8-2.5m	212x119.2x52.6x45.6mm	ILAR-03571






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	140°	IP65	Infrared	No	Surface Wall

Power	Color Temperature (CCT)	Total Luminous Flux (±5%)	Detection Distance	Installation Height	Size	SKU
20W	4000K	1900lm	9m	1.8-2.5m	210x210x41mm	ILAR-02126





Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	140°	IP65	Infrared	No	Surface Wall

Power	Color Temperature (CCT)	Total Luminous Flux (±5%)	Detection Distance	Installation Height	Size	SKU
20W	4000K	1700lm	9m	1.8-2.5m	Ø149.3x196.5x82mm	ILAR-01060

WALL LUMINAIRE WITH SENSOR






Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	140°	IP65	Infrared	No	Surface Wall

Power	Color Temperature (CCT)	Total Luminous Flux (±5%)	Detection Distance	Installation Height	Size	SKU
20W	4000K	2000lm	9m	1.8-2.5m	250x188x66mm	ILAR-01063





Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	220°	IP65	Infrared	No	Surface Wall

Power	Color Temperature (CCT)	Total Luminous Flux (±5%)	Detection Distance	Installation Height	Size	SKU
30W	4000K	2200lm	5-10m	1.8-2.5m	199x188x225mm	ILAR-01064


BULB WITH SENSOR





Voltage	Detection Angle	IP	Type	Dimming	Mounting Type
220-240V	360°	IP20	Microwave	No	Screw

Power	Color Temperature (CCT)	Total Luminous Flux (±5%)	Detection Distance	Installation Height	Size	SKU
7W	4000K	600lm	5m	2.3-5m	Ø60x108mm	ILAR-02055

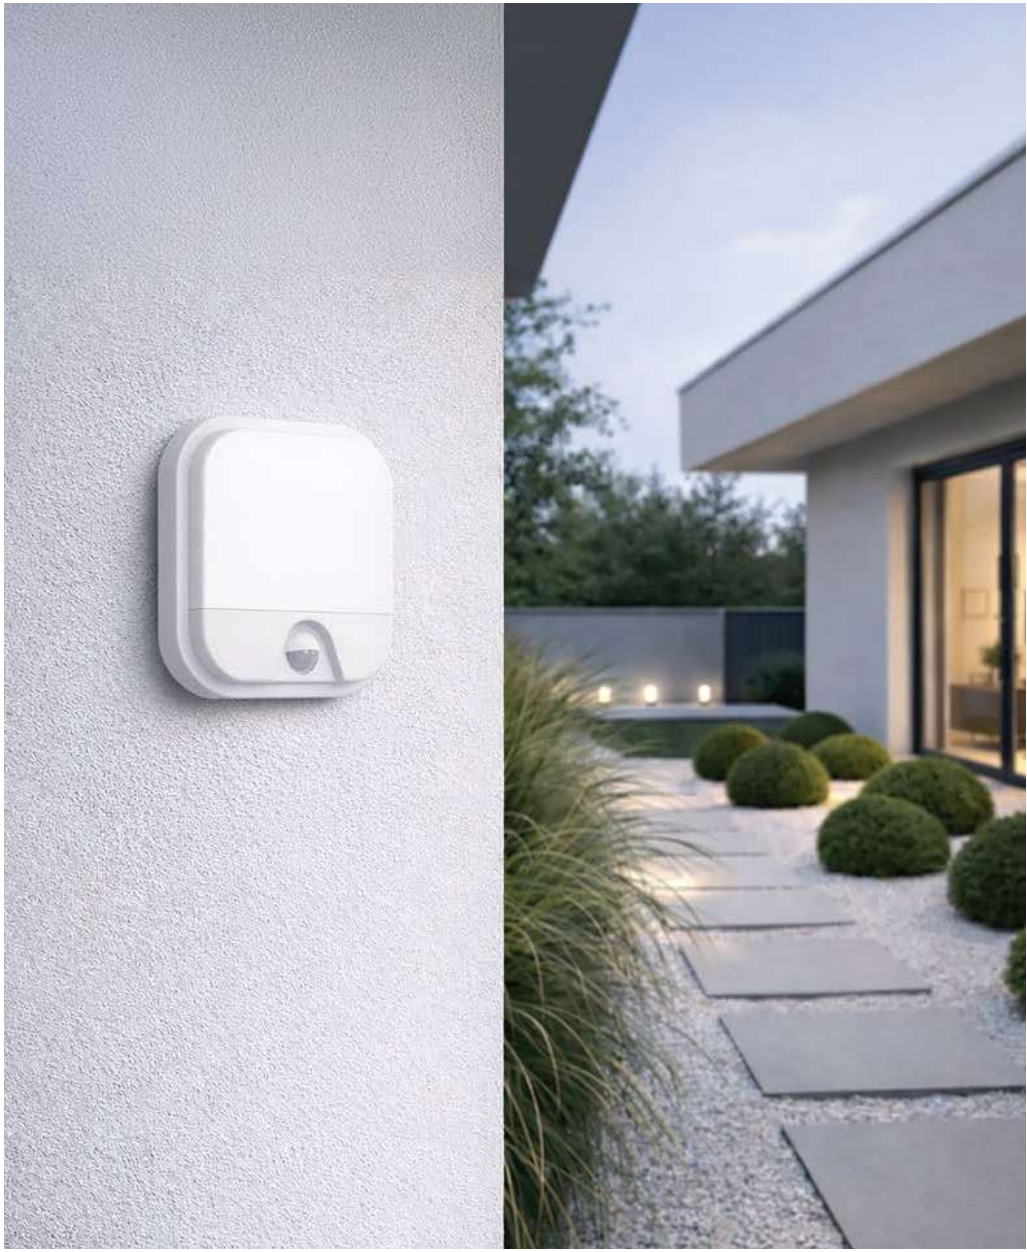

276–285




EMERGENCY

LIGHTING

SAFELUX






Voltage	Body Material	IP	Type	Prepared for Remote Control	Mounting Type
220-240V	Polycarbonate Diffuser & ABS Housing	IP65	Maintained/Non Maintained	YES	Recessed/Surface

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Battery	SKU
Safelux	3.8W	4000K 6000K	200lm	3 Hours 3.6V 1500mAh NI-MH	ILEM-00049 ILEM-00034

SAFELUX DOUBLE





Voltage	Body Material	IP	Type	Prepared for Remote Control	Mounting Type
220-240V	Polycarbonate Diffuser & ABS Housing	IP65	Maintained/Non Maintained	YES	Recessed/Surface

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Battery	SKU
Safelux Double	3.8W	6000K	200lm	3.6V 1500mAh NI-MH	ILEM-00071



Options for Safelux and Safelux Double (Not included)



Edge-lit Exit
267x100x10mm
ILEM-00035

Difusor
ILEM-00040



Recessed Kit
ILEM-00043




Protection Grid
ILEM-00036



Pictograma
ILEM-00045

EASYLUX II





Voltage	Body Material	IP	Type	Prepared for Remote Control	Mounting Type
220-240V	ABS base + Polycarbonate Cover	IP20	Maintained/Non Maintained	YES	Recessed/Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Battery	SKU
3W	6000K	150lm	3 Hours 3.2V 1.5Ah LifePO4	ILEM-00064


Options (Not included)



Recessed Kit
ILEM-00070

DUOLUX






Voltage	Body Material	IP	Type	Mounting Type
220-240V	Polycarbonate Case	IP20	Maintained/Non Maintained	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Battery	SKU
3W	6000K	40-70lm	3 Hours 3.7V 1500mAh Li-ion battery	ILEM-00066

LONGLUX






Voltage	Body Material	IP	Type	Prepared for Remote Control	Mounting Type
220-240V	Polycarbonate Case	IP65	Maintained/Non Maintained	YES	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Battery	SKU
1W	6000K	150lm	3 Hours LiFePO4 3.2V 1500mAh	ILEM-00076



POWERLUX





Voltage	Body Material	IP	Type	Mounting Type
220-240V	ABS base + Polycarbonate Cover	IP65	Maintained/Non Maintained	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Battery	SKU
8W	6000K	500lm	3 Hours	ILEM-00061


Options (Not included)



Pictograma
ILEM-00045

POWERLUX SLIM





Voltage	Body Material	IP	Type	Prepared for Remote Control	Mounting Type
220-240V	ABS base + Polycarbonate Cover	IP65	Maintained/Non Maintained	YES	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Battery	SKU
8W	6000K	800lm	3 Hours 3.7V 4000mAh Li (NiCoMn)	ILEM-00065

Options (Not included)




Difusor
ILEM-00075

Difusor
ILEM-00067

Pictograma
ILEM-00045

DOTLUX






Voltage	Body Material	IP	Type	Mounting Type
220-240V	Polycarbonate Diffuser & ABS Housing	IP20	Non Maintained Maintained/Non Maintained	Recessed/Surface

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Battery	Size	Cut-out	SKU
Dotlux	2W	6500K	200lm	3 Hours LiFePO4 6.4V600mAh	Ø130x121x175mm	Ø115mm-Ø120mm	ILEM-00051

DOTLUX PRO





Voltage	Body Material	IP	Type	Mounting Type
220-240V	Polycarbonate Diffuser & ABS Housing	IP20	Non Maintained Maintained/Non Maintained	Recessed/Surface

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Battery	Size	Cut-out	SKU
Dotlux PRO	6W	6500K	450lm	3 Hours 3.6V 600mAh Ni-Cad	Ø140x55.3mm	Ø115mm-Ø120mm	ILEM-00052

Options for Dotlux and Dotlux PRO (Not included)




Surface Kit
ILEM-00053



IP65 Kit
ILEM-00058

EMERGENCY PROJECTOR






Voltage	Body Material	IP	Type	Prepared for Remote Control	Mounting Type
220-240V	Polycarbonate Diffuser & ABS Housing	IP65	Non Maintained	YES	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Battery	SKU
6.8W	6500K	750lm	3 Hours 12V2.8Ah Ni-Cad	ILEM-00033
17W	6500K	2000lm	3 Hours 22.2V 2Ah Ni-Cad	ILEM-00059

DLUX




Voltage	Body Material	IP	Type	Prepared for Remote Control	Mounting Type
220-240V	Polycarbonate	IP42	Maintained/Non Maintained	YES	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Battery	SKU
4W	4000K	300lm	3 Hours 3.2V 3200mAh LiFePO4 battery	ILEM-00081

SIGLUX 5-IN-1





Voltage	Body Material	IP	Type
220-240V	PMMA Exit Panel & Polycarbonate	IP20	Maintained/Non Maintained

Model	Power	Total Luminous Flux (±5%)	Battery	Mounting Type	SKU
Siglux	2.5W	100lm	6 Hours 3.6V 500mAH NiCad	Surface	ILEM-00054
Siglux 5-in-1	3W	100lm	3 Hours 3.2V 1.6Ah LiFePO4	Surface/Suspended/ Wall/Recessed	ILEM-00072

Options (Not included)



White Recessed Kit for 5-in-1
ILEM-00073




Black Recessed Kit for 5-in-1
ILEM-00074

ACCESSORIES


		Housing Colour	IP	Body Material	SKU
	Remote Controller 02TIE01 AL	White	IP20	Aluminium	ILEM-00047
	Emergency Kit for LED Panel and Downlights Output: 20-55V	White	IP20	Aluminium	ILEM-00062
	Emergency Kit for LED Panel and Downlights Output: 60-300V	White	IP20	Aluminium	ILEM-00063
	Emergency Kit for LED Tube 8-25W	White	IP20	Aluminium	ILEM-00027

Emergency Lighting Controls

Automatic Function test of the luminaires
Automatic Duration test of the batteries
Real-time Dashboard with the state of all luminaries
Automated Failure Reporting

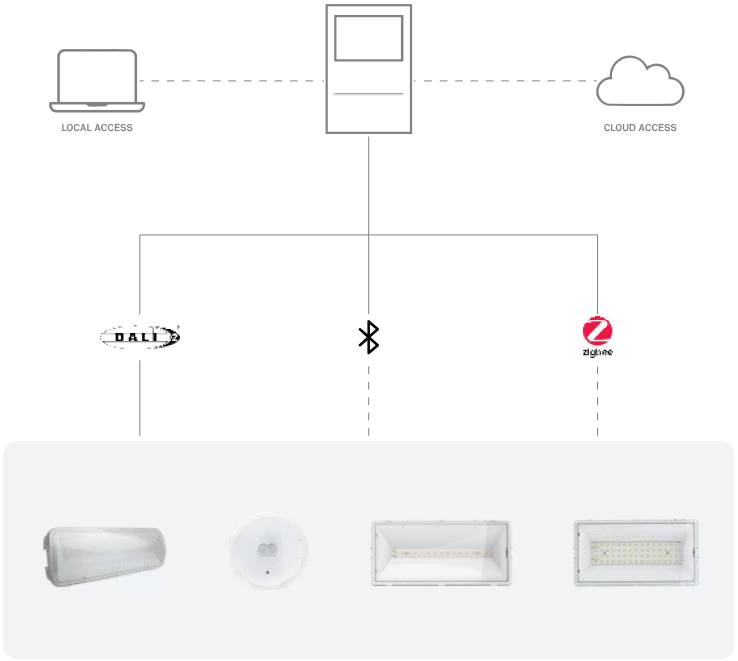



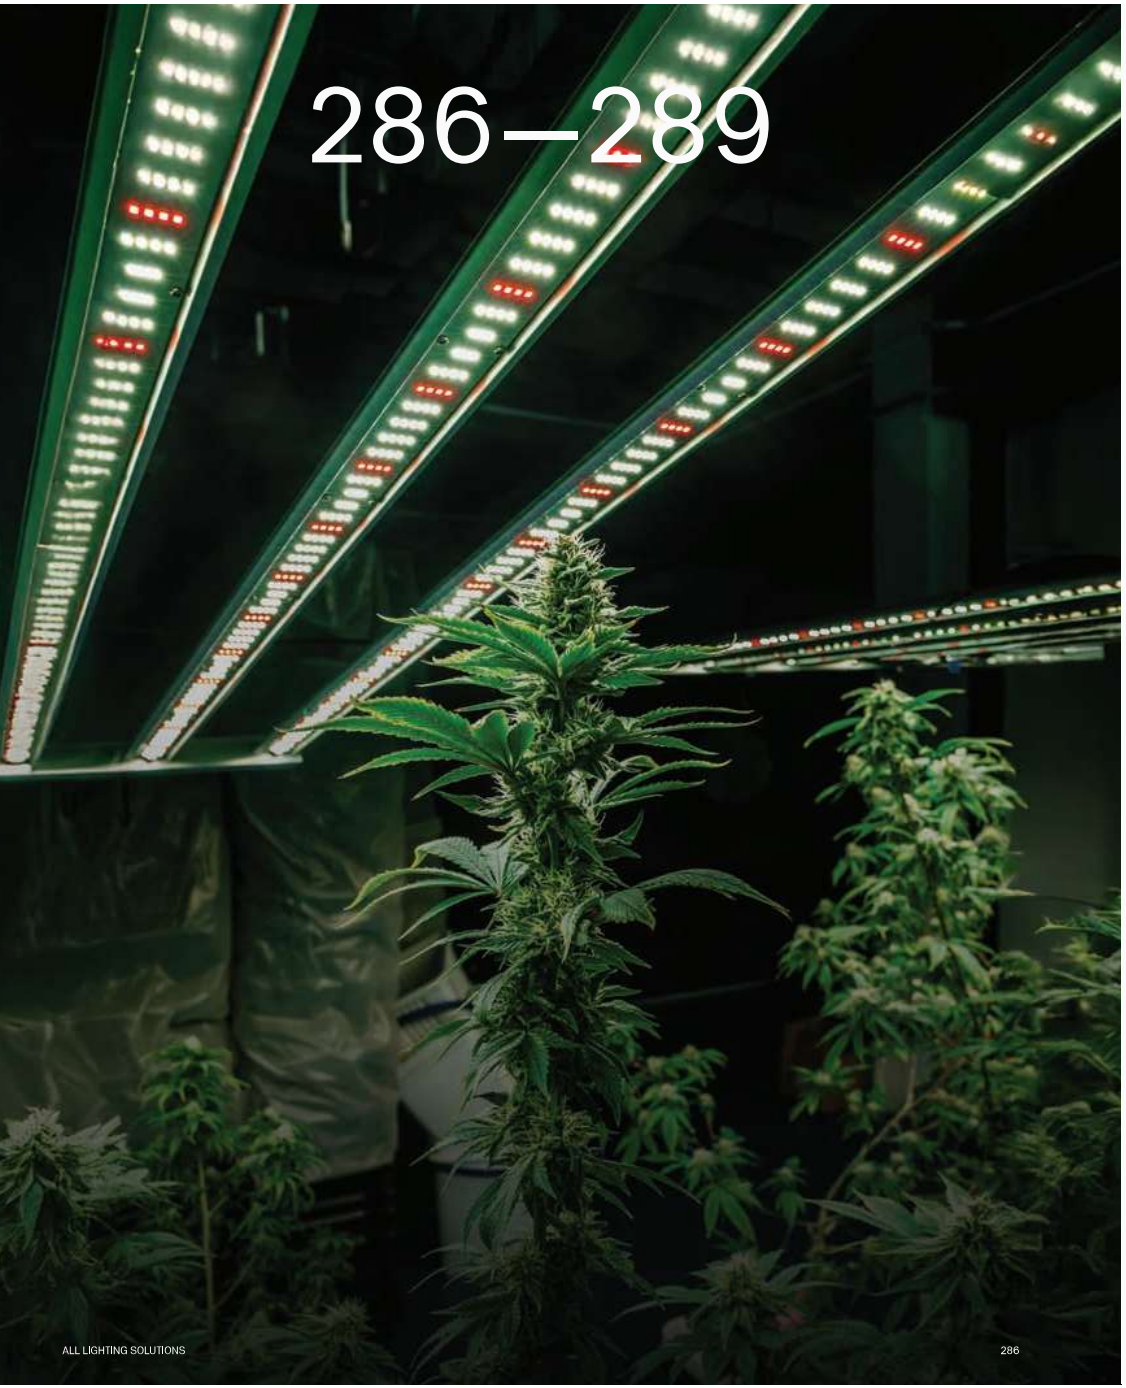


HORTICULTURE

LIGHTING

ALL LIGHTING SOLUTIONS

HORTI ONE






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium + Glass cover	120° to 150°	IP65	Ceiling Mounting

Power	System Efficacy	PPF Output	Dimming Options	SKU
600W	≥2.8umol/J	2100µmol/s	0-10V	On-request
830W	≥3.5umol/J	2910µmol/s		

HORTI LINEAR





Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium + Glass cover	120°	IP65	Ceiling Mounting

Power	System Efficacy	PPF Output	Dimming Options	SKU
320W	2.8umol/J	900µmol/s	0-10V	On-request

HORTI TUBE






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	120° to 150°	IP65	Ceiling Mounting

Power	System Efficacy	PPF Output	Dimming Options	SKU
50W	2.5umol/J	125µmol/s	0-10V	On-request
75W		187.5µmol/s		
100W		250µmol/s		

HORTI FRAME EVO






Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	120°	IP65	Ceiling Mounting

Power	System Efficacy	PPF Output	Dimming Options	SKU
720W	2.7umol/J	1750µmol/s	0-10V	On-request
830W	2.8umol/J	2330µmol/s		

HORTI SLIM



Voltage	Body Material	Beam Angle	IP	Mounting Type
220-240V	Aluminium	120°	IP65	Ceiling Mounting

Power	System Efficacy	PPF Output	Dimming Options	SKU
18W	2.20umol/J	>40µmol/s	0-10V	On-request

FITTING

GU10

ALL LIGHTING SOLUTIONS

ACCESSORIES GU10

FIXED IP65

MACH SQUARE



Size	Cut-out	IP	Installation	Body Material	Housing Colour	SKU
92x92mm	82mm	IP65	Recessed	Aluminium	White	ILAR-02467
					Black	ILAR-02584

MACH ROUND



Size	Cut-out	IP	Installation	Body Material	Housing Colour	SKU
Ø92mm	Ø82mm	IP65	Recessed	Aluminium	White	ILAR-02468
					Black	ILAR-02585

ROUND



Size	Cut-out	IP	Installation	Body Material	Housing Colour	SKU
Ø83x25mm	Ø65mm	IP65	Recessed	Aluminium	White	ILAR-00196

FIXED IP20

MACH SQUARE V2



Model	Size	Cut-out	IP	Installation	Body Material	Housing Colour	SKU
Simple	88x88x26mm	75mm	IP20	Recessed	Aluminium	White	ILAR-02456
						Black	ILAR-02457
Double	168x88x26mm	160x75mm	IP20	Recessed	Aluminium	White	ILAR-02458
						Black	ILAR-02459
Triple	248x88x26mm	240x75mm	IP20	Recessed	Aluminium	White	ILAR-02461
						Black	ILAR-02460

MACH ROUND V2



Size	Cut-out	IP	Installation	Body Material	Housing Colour	SKU
Ø86x26mm	Ø75mm	IP20	Recessed	Aluminium	White	ILAR-02462
					Black	ILAR-02463

MACH SQUARE



Size	Cut-out	IP	Installation	Body Material	Housing Colour	SKU
81x81mm	72x72mm	IP20	Recessed	Aluminium	White	ILAR-00898
					Black	ILAR-01018

ACCESSORIES GU10

FIXED IP20

MACH ROUND



Size	Cut-out	IP	Installation	Body Material	Housing Colour	SKU
Ø82x35mm	Ø72mm	IP20	Recessed	Aluminium	White	ILAR-00897
					Black	ILAR-01017

ROUND



Size	Cut-out	IP	Installation	Body Material	Housing Colour	SKU
Ø78x25mm	Ø62mm	IP20	Recessed	Aluminium	White	ILAR-00115
					Black	ILAR-01016
					Brushed Steel	ILAR-00114

SQUARE



Size	Cut-out	IP	Installation	Body Material	Housing Colour	SKU
75x75mm	62mm	IP20	Recessed	Aluminium	White	ILAR-01019
					Black	ILAR-01020

MACH ROUND TRIMLESS



Size	Cut-out	IP	Installation	Body Material	Housing Colour	SKU
Ø125mm	Ø85mm	IP20	Recessed	Aluminium	White	ILAR-02466

HALE

Size	Cut-out	IP	Installation	Body Material	Housing Colour	SKU
Ø86x26mm	Ø75mm	IP20	Recessed	Aluminium	White	ILAR-02464

ACCESSORIES GU10

ROTABLES IP20

MACH SQUARE



Size	Cut-out	IP	Installation	Body Material	Housing Colour	SKU
93x93mm	Ø83mm	IP20	Recessed	Aluminium	White	ILAR-02469
					Black	ILAR-02470

MACH ROUND



Size	Cut-out	IP	Installation	Body Material	Housing Colour	SKU
Ø93x42mm	Ø83mm	IP20	Recessed	Aluminium	White	ILAR-01666
					Black	ILAR-01667

SQUARE



Size	Cut-out	IP	Installation	Body Material	Housing Colour	SKU
83x83mm	72mm	IP20	Recessed	Aluminium	White	ILAR-00194

ROUND



Size	Cut-out	IP	Installation	Body Material	Housing Colour	SKU
Ø78x25mm	Ø62mm	IP20	Recessed	Aluminium	Brushed Steel	ILAR-00191
Ø78x25mm	Ø62mm				White	ILAR-00192
Ø83mm	Ø72mm				White	ILAR-02465

ACCESSORIES GU10

		IP	SKU
	Suporte Cerâmico	IP20	ILAR-00449
	Suporte Cerâmico com Distanciador	IP20	ILAR-00450
	Suporte Cerâmico com Conector Rápido Isolado	IP20	ILAR-02553

CONNECTORS

		IP	SKU
	Ligador Rigid 2D	IP20	ILAR-02925
	Ligador Rigid 3D	IP20	ILAR-02926
	Ligador Rigid 4D	IP20	ILAR-02927
	Ligador Rigid 6D	IP20	ILAR-02928
	Ligador Rigid 8D	IP20	ILAR-02929
	Ligador FLEX 2D PRO	IP20	ILAR-02930
	Ligador FLEX 3D PRO	IP20	ILAR-02931
	Ligador FLEX 5D PRO	IP20	ILAR-02932
	Ligador FLEX INLINE 2D PRO	IP20	ILAR-02933
	Ligador FLEX INLINE 3D PRO	IP20	ILAR-02934
	Base Flat INLINE 3D PRO Calha DIM	IP20	ILAR-02935

ACCESSORIES IP68

		Housing Colour	Body Material	IP	SKU
	Ligador Simples 0.5-1.5mm M16 - 3P	Black	Plastic	IP68	ILAR-01118
	Ligador Simples 0.5-2.5mm M20 - 3P	Black	Plastic	IP68	ILAR-01119
	Ligador em " T" 0.5-2.5mm M20 - 3P	Black	Plastic	IP68	ILAR-01120
	Caixa Derivação Estanque 1 Derivação	Black	Plastic	IP68	ILAR-01121
	Caixa Derivação Estanque 2 Derivações	Black	Plastic	IP68	ILAR-01122
	Caixa Derivação Estanque 4 Derivações	Black	Plastic	IP68	ILAR-01123

LAMPS

TUBES I LAMPS I MODULES

ALL LIGHTING SOLUTIONS

GU10 120°



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/PVC	120°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
GU10	3W	3000K	340lm	Ø50x55mm	ILAR-00380
		4000K	360lm		ILAR-00381
		6500K	360lm		ILAR-00382
	5W	3000K	420lm	Ø50x55mm	ILAR-00321
		4000K	450lm		ILAR-00322
		6500K	450lm		ILAR-00323
	7W	3000K	600lm	Ø50x55mm	ILAR-00324
		4000K	630lm		ILAR-00326
		6500K	630lm		ILAR-00327
GU10 Power	10W	3000K	1000lm	Ø50x55mm	ILAR-02309
		4000K	1000lm		ILAR-02310
		6500K	1000lm		ILAR-02311

GU10 38°



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/PVC	38°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
GU10	6W	3000K	530lm	Ø50x55mm	ILAR-00550
		4000K	540lm		ILAR-00551
		6500K	540lm		ILAR-00552

GU10 DIMMABLE



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/PVC	45°/60°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
GU10 45°	7W	2700K	630lm	Ø50x55mm	ILAR-00930
GU10 45°		4000K	630lm		ILAR-00931
GU10 60°		2700K	630lm		ILAR-02474
GU10 60°		3000K	630lm		ILAR-02907
GU10 60°		4000K	630lm		ILAR-02475

MODULE



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/PVC	120°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Module	8W	3000K	680lm	Ø40x45mm	ILAR-00553
		4000K	690lm		ILAR-00554
		6500K	700lm		ILAR-00555

MODULE DIMMABLE



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/PVC	120°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Dimmable	6W	3CCT 3000K-4000K-6500K	550lm	Ø40x45mm	ILAR-03567

G4 / G9



Voltage	Body Material	Beam Angle	IP
G4 - 12V G9 - 220-240V	Aluminium/PVC	200°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
G4	1.5W	3000K	120lm	12x37mm	ILAR-00229
		4000K	130lm		ILAR-00230
		6000K	140lm		ILAR-00231
G4	2W	3000K	160lm	16x44mm	-
		4000K			ILAR-00933
		6000K			ILAR-01065
G9	2.5W	3000K	200lm	16x48mm	ILAR-00226
		4000K	210lm		ILAR-00227
		6000K	220lm		ILAR-00228

CANDLE



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/Glass	330°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Crystal	2W	2700K	200lm	38x98mm	ILAR-01755
Crystal	4W	2700K	400lm	38x98mm	ILAR-01756
Crystal	4W	3000K	470lm	38x98mm	ILAR-00153
Milk	4W	3000K	470lm	38x98mm	ILAR-00325
Flame	4W	3000K	470lm	35x120mm	ILAR-00159
Crystal	6W	1800K	590lm	38x98mm	ILAR-02481
Crystal	6W	2200K	600lm	38x98mm	ILAR-02482

G45



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/Glass	330°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
E14	4W	2700K	470lm	Ø45x78mm	ILAR-02483
		3000K			ILAR-00156
E27	4W	2700K	470lm	45x78mm	ILAR-02484
		3000K			ILAR-00157

A60



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/Glass	330°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Dimmable	6W	2700K	720lm	Ø60x105mm	ILAR-01757
	10W	1800K	1005lm		ILAR-02485
	10W	2200K	1010lm		ILAR-02486
Crystal	4W	3000K	470lm		ILAR-00141
	6W	3000K	720lm		ILAR-00144
	8W	3000K	880lm		ILAR-00147
Milk	8W	2700K	795lm		ILAR-02487
	8W	3000K	806lm		ILAR-00150
	8W	4000K	840lm		ILAR-00529
	8W	6500K	840lm		ILAR-00530

A60 SMOKY



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/Glass	330°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Smoky	3.4W	1800K	100lm	Ø60x108mm	ILAR-02497

A60 GOLD/SILVER



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/Glass	330°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Gold	4W	2200K	320lm	Ø60x108mm	ILAR-02488
		3000K	380lm		ILAR-00737
Silver	4W	2200K	320lm		ILAR-02489
		3000K	380lm		ILAR-00736

A100



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/Glass	330°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
A100	4W	2200K	300lm	Ø100x175mm	ILAR-00741

G95 GLOBO

Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/Glass	330°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Crystal	8W	2200K	830lm	Ø95x136mm	ILAR-02491
Crystal	8W	3000K	880lm		ILAR-00162

G95 GLOBO GOLD/SILVER



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/Glass	330°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Silver	6W	2200K	510lm	Ø95x136mm	ILAR-02492
Silver	6W	3000K	540lm		ILAR-00738
Gold	6W	2200K	510lm		ILAR-02493
Gold	6W	3000K	540lm		ILAR-00739

G125 CRISTAL / AMBER



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/Glass	330°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Crystal	8W	2200K	840lm	Ø125x175mm	ILAR-02494
Crystal	8W	3000K	880lm		ILAR-00165
Amber	6W	3000K	600lm		ILAR-00740

ST64



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/Glass	330°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Crystal	4W	3000K	440lm	Ø64x142mm	ILAR-00169
Crystal	6W	3000K	650lm		ILAR-00168
Amber	6W	2200K	560lm		ILAR-02490
Amber	6W	3000K	600lm		ILAR-00171

ST64 DECO



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/Glass	330°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Amber	6.5W	2200K	300lm	Ø100x175mm	ILAR-02496

G125 DECO DIMMABLE



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/Glass	330°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Amber	7W	2200K	600lm	Ø125x175mm	ILAR-02501

G125 CRYSTAL DIMMABLE

Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/Glass	330°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Crystal	2.4W	2200K	150lm	Ø125x175mm	ILAR-02495

DECO DIMMABLE



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/Glass	330°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Amber	4.8W	2200K	400lm	Ø170x270mm	ILAR-02498

G95 SMOKY DIMMABLE



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/Glass	330°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Smoky	2.2W	2200K	60lm	Ø95x140mm	ILAR-02499

E14 CLASSIC

Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/PVC	180°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Classic	4W	3000K	340lm	37x100mm	ILAR-00310
		4000K	350lm		ILAR-00311
		6500K	360lm		ILAR-00312
Classic	6W	3000K	520lm	37x100mm	ILAR-00413
		4000K	530lm		ILAR-00414
		6500K	540lm		ILAR-00415
Dimmable	6W	2700K	500lm	37x100mm	ILAR-02476
		4000K	530lm		ILAR-02477

G45 CLASSIC



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/PVC	220°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
E14	4W	3000K	320lm	Ø45x78mm	ILAR-00374
		4000K	330lm		ILAR-00375
		6500K	340lm		ILAR-00376
	6W	3000K	520lm	Ø45x78mm	ILAR-00435
		4000K	530lm		ILAR-00436
		6500K	540lm		ILAR-00437
E27	4W	3000K	340lm	Ø45x78mm	ILAR-00368
		4000K	360lm		ILAR-00369
		6500K	360lm		ILAR-00370
	6W	3000K	520lm	Ø45x78mm	ILAR-00371
		4000K	530lm		ILAR-00372
		6500K	540lm		ILAR-00373

E27 CLASSIC



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/PVC	220°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Classic	7W	3000K	610lm	60x108mm	ILAR-00401
		4000K	620lm	60x108mm	ILAR-00402
		6500K	630lm	60x108mm	ILAR-00403
Classic	10W	3000K	850lm	60x108mm	ILAR-00404
		4000K	850lm	60x108mm	ILAR-00405
		6500K	850lm	60x108mm	ILAR-00406
Classic	12W	3000K	1050lm	60x118mm	ILAR-00407
		4000K	1100lm	60x118mm	ILAR-00408
		6500K	1150lm	60x118mm	ILAR-00409
Dimmable	12W	2700K	1050lm	60x118mm	ILAR-02478
		4000K	1100lm	60x118mm	ILAR-02479
		6500K	1150lm	60x118mm	ILAR-02480
Classic	15W	3000K	1200lm	60x118mm	ILAR-00410
		4000K	1300lm	60x118mm	ILAR-00411
		6500K	1400lm	60x118mm	ILAR-00412
Classic	20W	3000K	1850lm	60x118mm	ILAR-00477
		4000K	1850lm	Ø70x138mm	ILAR-00478
		6500K	1900lm	Ø70x138mm	ILAR-00479
Classic	25W	3000K	2150lm	Ø80x163mm	ILAR-00480
		4000K	2175lm	Ø80x163mm	ILAR-00481
		6500K	2200lm	Ø80x163mm	ILAR-00482

GLOBO A120



Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/PVC	200°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Classic	18W	3000K	1580lm	Ø120x151mm	ILAR-00377
		4000K	1650lm		ILAR-00378
		6500K	1735lm		ILAR-00379

BIG

Voltage	Body Material	Beam Angle	IP
220-240V	Aluminium/PVC	220°	IP20

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
Big	30W	4000K	3000lm	Ø100x149.6mm	ILAR-01049
	40W	4000K	3600lm	Ø115x163.6mm	ILAR-00883

SUPER ARON



Voltage	Body Material	Beam Angle	IP	Base
220-240V	Aluminium/PVC	120°	IP20	E40

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
100W	6500K	12500lm	Ø190x275mm	White	ILAR-02957
140W		17500lm	Ø230x306mm		ILAR-02958

Options (Not included)



Reflector D40
ILAR-00203



Reflector D44
ILAR-00473

VERSUS



Voltage	Body Material	Beam Angle	IP	Mounting Type
100-240V	Magnesium Alloy AL+PC	90° - 150°	IP65	Screw

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	Housing Colour	SKU
54W / E27	4000K	7000lm	297x138x87mm	Black	ILAR-00749
54W / E40		7000lm			ILAR-00549
75W		9800lm			ILAR-00547
95W-75W-63W Switch Power	4000K	12400lm			ILAR-01934

KORN



Voltage	Body Material	Beam Angle	IP	Mounting Type
100-240VAC	Aluminum	60°x110°	IP64	Screw

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Base	Housing Colour	Size	SKU
20W	4000K	2600lm	E27	White	Ø55x260mm	ILAR-02557
20W	5000K	2600lm	E27			ILAR-00843
30W	4000K	3900lm	E27		Ø95x260mm	ILAR-02558
30W	5000K	3900lm	E27			ILAR-00794
40W	4000K	5200lm	E27			ILAR-02559
40W	5000K	5200lm	E27			ILAR-00751
40W	4000K	5200lm	E40			ILAR-02560
40W	5000K	5200lm	E40			ILAR-00546
54W	4000K	7020lm	E40			ILAR-02561
54W	5000K	7020lm	E40			ILAR-00932
80W	4000K	10400lm	E40			ILAR-02562
80W	5000K	10400lm	E40			ILAR-00934
100W	4000K	13000lm	E40		Ø125x285mm	ILAR-02563
100W	5000K	13000lm	E40			ILAR-00608

Options (Not included)



Adaptador E27 para E40
ILDV-00306



Adaptador E40 para E27
ILDV-00307

T8 3CCT 120LM/W 1 SIDE



Voltage	Body Material	Beam Angle	IP
180-265V	Glass	320°	IP20

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
9W	3CCT 3000K-4000K-6500K	1080lm	600mm	ILAR-03564
18W	3CCT 3000K-4000K-6500K	2160lm	1200mm	ILAR-03565
22W	3CCT 3000K-4000K-6500K	2640lm	1500mm	ILAR-03566

T8 TECNIC PRO 130LM/W 1 SIDE



Voltage	Body Material	Beam Angle	IP	PF
85-265V	Glass	320°	IP20	PF0.9

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
9W	4000K	1170lm	600mm	ILAR-00498
	6500K			ILAR-00499
18W	4000K	2340lm	1200mm	ILAR-00501
	6500K			ILAR-00502
22W	4000K	2860lm	1500mm	ILAR-00504
	6500K			ILAR-00505

T8 EVO 160LM/W 1 SIDE



Voltage	Body Material	Beam Angle	IP	PF
180-265V	Glass	320°	IP20	PF0.5

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
9W	4000K	1440lm	600mm	ILAR-03760
	6500K			ILAR-03761
18W	4000K	2880lm	1200mm	ILAR-03762
	6500K			ILAR-03763
22W	4000K	3520lm	1500mm	ILAR-03764
	6500K			ILAR-03765

T8 HIGH-LUMEN 180LM/W 1 SIDE



Voltage	Body Material	Beam Angle	IP	PF
85-265V	Glass	320°	IP20	PF0.9

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
7W	4000K	1260lm	600mm	ILAR-00863
	6500K			ILAR-01089
14W	4000K	2520lm	1200mm	ILAR-00864
	6500K			ILAR-00865
21W	4000K	3780lm	1500mm	ILAR-00867
	6500K			ILAR-00868

T8 STANDARD 2 SIDES



Voltage	Body Material	Beam Angle	IP
180-265V	Glass	320°	IP20

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
9W	4000K	990lm	600mm	LAR-00281
	6500K			ILAR-00282
18W	4000K	1980lm	1200mm	ILAR-00284
	6500K			ILAR-00285
22W	4000K	2420lm	1500mm	ILAR-00287
	6500K			ILAR-00288

T8 STANDARD 1 SIDE



Voltage	Body Material	Beam Angle	IP
180-265V	Glass	320°	IP20


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
9W	3000K	990lm	600mm	ILAR-00289
	4000K			ILAR-00290
	6500K			ILAR-00291
12W	4000K	1320lm	900mm	ILAR-02025
	6500K			ILAR-02026
18W	3000K	1980lm	1200mm	ILAR-00292
	4000K			ILAR-00293
	6500K			ILAR-00294
22W	3000K	2420lm	1500mm	ILAR-00295
	4000K			ILAR-00296
	6500K			ILAR-00297

T5 STANDARD 2 SIDES



Voltage	Body Material	Beam Angle	IP
180-265V	Glass	320°	IP20

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Size	SKU
9W	4000K	990lm	600mm	ILAR-00485
	6500K			ILAR-00486
18W	4000K	1980lm	115cm	ILAR-00488
	4500K	2700lm (150lm/W)		ILAR-01244
	6000K	1980lm		ILAR-00489
20W	4000K	3000lm (150lm/W)	150cm	ILAR-01187
	6500K	2200lm		ILAR-00487

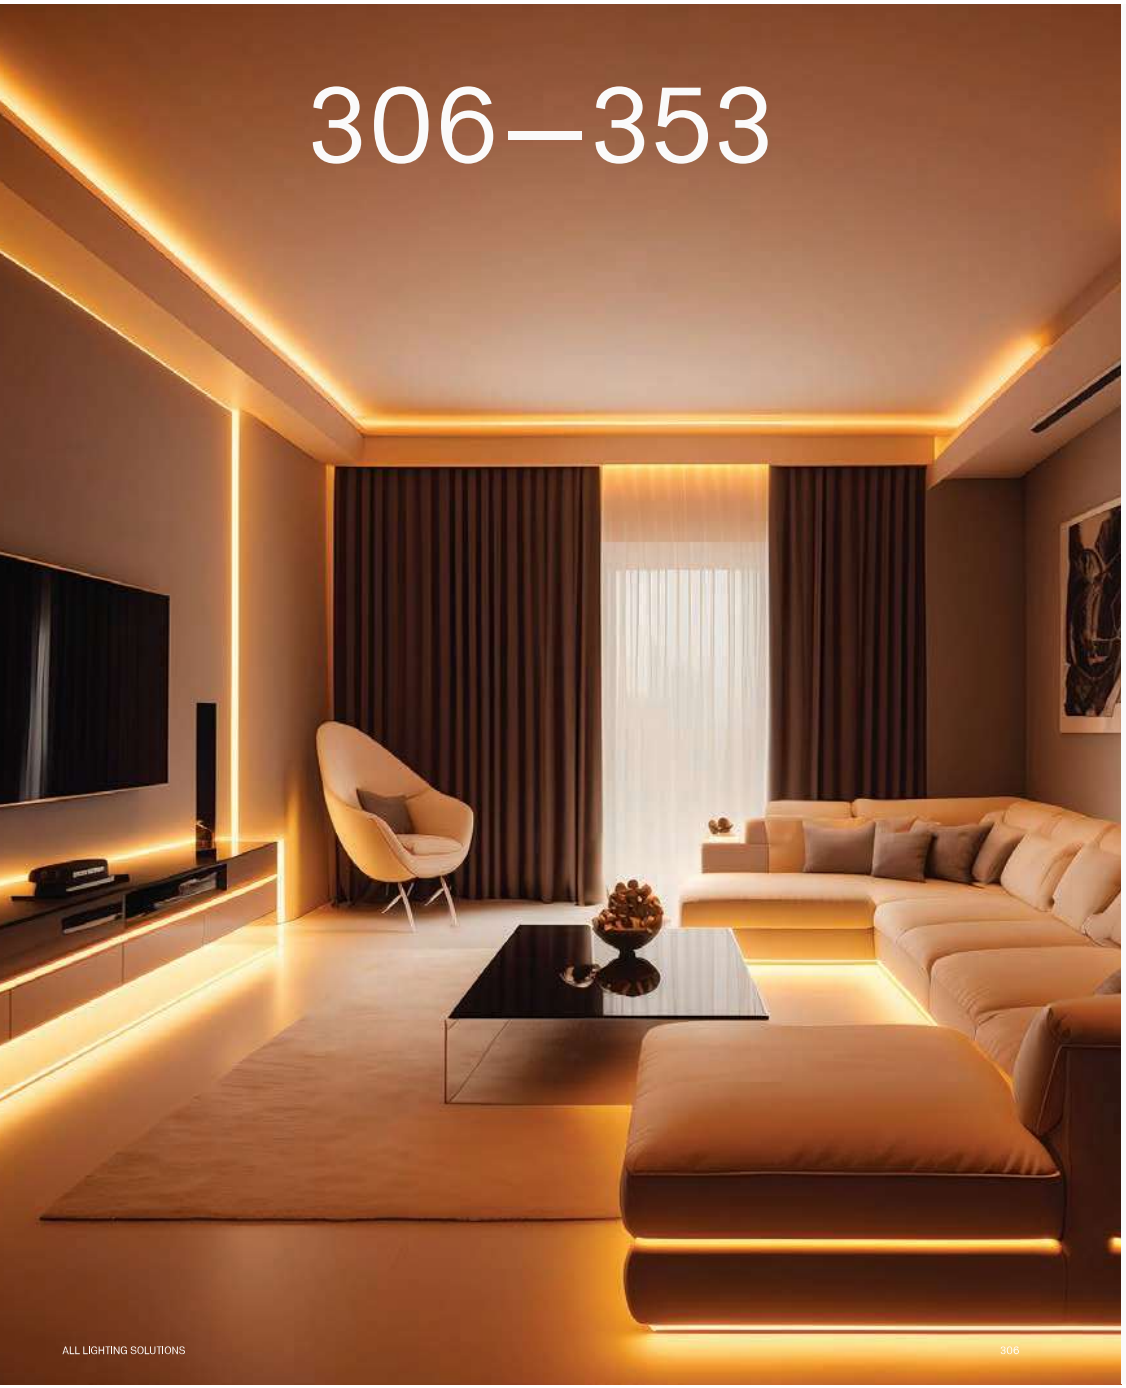

LED STRIP

230V / SMD / COB

SLIMSTRIP 230V





Voltage	Beam Angle	IP	Mounting Type
230V	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Size	SKU
12W	3000K	1200lm/m	25m	10.5x4.5mm	ILAR-03021
	4000K	1200lm/m	25m	10.5x4.5mm	ILAR-03023
	6500K	1200lm/m	25m	10.5x4.5mm	ILAR-03024
12W	3000K	1200lm/m	50m	10.5x4.5mm	ILAR-03025
	4000K	1200lm/m	50m	10.5x4.5mm	ILAR-03026
	6500K	1200lm/m	50m	10.5x4.5mm	ILAR-03027

Options (Not included)



End Cap
ILAR-03028



Middle Connector
ILAR-03029



Fixation Clip
ILAR-03030



Power Feed Plug
ILAR-03031



L Connector
ILAR-03518

PROSTRIP 230V IP65





Voltage	Beam Angle	IP	Mounting Type
230V	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	SKU
15W	3000K	1700lm/m	50m	12mm	ILAR-01407
	4000K		50m		ILAR-01408
	6000K		50m		ILAR-01409

Options (Not included)



Power Feed
ILAR-01421



Joint Connector
ILAR-01422



Power Feed Plug
ILAR-01542

PROJECT STRIP 230V





Voltage	Beam Angle	IP	Mounting Type
230V	120°	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	SKU
15W	2700K	1500lm/m	100m	12x4mm	ILAR-02765
	3000K		100m		ILAR-01925
	4000K		100m		ILAR-01926
	6000K		100m		ILAR-01927

Options (Not included)



End Cap
ILAR-01928


End Cap with Neck
ILAR-01929



Profile Terminal Block Set
ILAR-01930

COB 230V





Voltage	Beam Angle	IP	Mounting Type
230V	120°	IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	SKU
15W	2700K	1200lm/m	50m	10mm	ILAR-03253
	3000K		50m		ILAR-03254
	4000K		50m		ILAR-03255
	6000K		50m		ILAR-03256

Options (Not included)



Power Feed Plug
ILAR-03257



Power Feed
ILAR-03258

Connector
ILAR-03259



Mounting Clip
ILAR-03260

End Cap
ILAR-03261


LED STRIP


24V

ALL LIGHTING SOLUTIONS

STANDARD SMD 24V







Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20 / IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
4.8W	2700K	408lm/m	5m	8mm	IP20	ILAR-03158
	3000K	408lm/m			IP20	ILAR-03159
	4000K	437lm/m			IP20	ILAR-03160
	6000K	437lm/m			IP20	ILAR-03161
	2700K	408lm/m			IP65	ILAR-03162
	3000K	408lm/m			IP65	ILAR-03163
	4000K	437lm/m			IP65	ILAR-03164
	6000K	437lm/m			IP65	ILAR-03165
9.6W	2700K	816lm/m	5m	8mm	IP20	ILAR-03166
	3000K	816lm/m			IP20	ILAR-03167
	4000K	874lm/m			IP20	ILAR-03168
	6000K	874lm/m			IP20	ILAR-03169
	2700K	816lm/m			IP65	ILAR-03170
	3000K	816lm/m			IP65	ILAR-03171
	4000K	874lm/m			IP65	ILAR-03172
	6000K	874lm/m			IP65	ILAR-03173
12W	2700K	1080lm/m	5m	8mm	IP20	ILAR-03174
	3000K	1080lm/m			IP20	ILAR-03175
	4000K	1155lm/m			IP20	ILAR-03176
	6000K	1155lm/m			IP20	ILAR-03177
	2700K	1080lm/m			IP65	ILAR-03178
	3000K	1080lm/m			IP65	ILAR-03179
	4000K	1155lm/m			IP65	ILAR-03180
	6000K	1155lm/m			IP65	ILAR-03181
14.4W	2700K	1267lm/m	5m	8mm	IP20	ILAR-03182
	3000K	1267lm/m			IP20	ILAR-03183
	4000K	1354lm/m			IP20	ILAR-03184
	6000K	1354lm/m			IP20	ILAR-03185
	2700K	1267lm/m			IP65	ILAR-03186
	3000K	1267lm/m			IP65	ILAR-03187
	4000K	1354lm/m			IP65	ILAR-03188
	6000K	1354lm/m			IP65	ILAR-03189
19.2W	2700K	1700lm/m	5m	10mm	IP20	ILAR-03190
	3000K	1700lm/m			IP20	ILAR-03191
	4000K	1819lm/m			IP20	ILAR-03192
	6000K	1819lm/m			IP20	ILAR-03193
	2700K	1700lm/m			IP65	ILAR-03194
	3000K	1700lm/m			IP65	ILAR-03195
	4000K	1819lm/m			IP65	ILAR-03196
	6000K	1819lm/m			IP65	ILAR-03197

Options (Not included)



Connector Single Color 9 in 1
8mm ILAR-03311
10mm ILAR-03319



Connector with Screw "T" and "L"
8mm ILAR-03312
10mm ILAR-03320



Connector with Screw
8mm ILAR-03313
10mm ILAR-03321



Connector with Screw Single Color
8mm ILAR-03314
10mm ILAR-03322



Connector "L" Single Color
8mm ILAR-03315
10mm ILAR-03323




Connector Single Color
8mm ILAR-03316
10mm ILAR-03324

Connector-Cable Single Color
8mm ILAR-03317
10mm ILAR-03325

Connector-Cable-Connector Single Color
8mm ILAR-03318
10mm ILAR-03326

PROSTRIP SMD 24V





Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20 / IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
9.6W	2700K	716lm/m	5m	10mm	IP20	ILAR-00632
	2700K	716lm/m	50m	10mm	IP20	ILAR-02673
	4000K	780lm/m	5m		IP20	ILAR-00633
	4000K	780lm/m	50m	10mm	IP20	ILAR-02671
	6500K	847lm/m	5m		IP20	ILAR-00634
	2700K	644lm/m	5m		IP65	ILAR-00635
	4000K	702lm/m	5m		IP65	ILAR-00636
	6500K	762lm/m	5m		IP65	ILAR-00637
14.4W	2700K	1040lm/m	5m	10mm	IP20	ILAR-00620
	2700K	1040lm/m	50m	10mm	IP20	ILAR-02670
	4000K	1130lm/m	5m		IP20	ILAR-00621
	4000K	1130lm/m	50m	10mm	IP20	ILAR-02672
	6500K	1212lm/m	5m		IP20	ILAR-00622
	2700K	936lm/m	5m		IP65	ILAR-00623
	4000K	1017lm/m	5m		IP65	ILAR-00624
	6500K	1091lm/m	5m		IP65	ILAR-00625
19.2W	2700K	1565lm/m	5m	10mm	IP20	ILAR-00626
	4000K	1622lm/m	5m		IP20	ILAR-00627
	6500K	1776lm/m	5m		IP20	ILAR-00628
	2700K	1409lm/m	5m		IP65	ILAR-00629
	4000K	1460lm/m	5m		IP65	ILAR-00630
	6500K	1598lm/m	5m		IP65	ILAR-00631

Options (Not included)



Double Connector 2 PIN
With Cable 15cm
10mm ILAR-00639



Double Connector
2 PIN
10mm ILAR-00640



Connector Single Color 9 in 1
10mm ILAR-03319



Connector with Screw "T" and "L"
10mm ILAR-03320



Connector with Screw
10mm ILAR-03321



Connector with Screw Single Color
10mm ILAR-03322



Connector "L" Single Color
10mm ILAR-03323



Connector Single Color
10mm ILAR-03324




Connector-Cable Single Color
10mm ILAR-03325



Connector-Cable-Connector Single Color
10mm ILAR-03326

SUPER LONG PROSTRIP 20M 24V





Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
9.6W	2700K	864lm/m	20m	10mm	IP20	ILAR-01411
	3000K	960lm/m				ILAR-03127
	4000K	1008lm/m				ILAR-01412
	6000K	1056lm/m				ILAR-01413

Options (Not included)



Connector Single Color 9 in 1
10mm ILAR-03319



Connector with Screw "T" and "L"
10mm ILAR-03320



Connector with Screw
10mm ILAR-03321



Connector with Screw Single Color
10mm ILAR-03322



Connector "L" Single Color
10mm ILAR-03323



Connector Single Color
10mm ILAR-03324



Connector-Cable Single Color
10mm ILAR-03325





Connector-Cable-Connector Single Color
10mm ILAR-03326




HIGH LUMEN 24V









Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20 / IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
14.4W	2500K	2310lm/m	5m	8mm	IP20	ILAR-03113
	2700K	2310lm/m				ILAR-03115
	3000K	2310lm/m				ILAR-03117
	4000K	2310lm/m				ILAR-03119
	6000K	2310lm/m				ILAR-03121
14.4W	2500K	2195lm/m	5m	10mm	IP67	ILAR-03114
	2700K	2195lm/m				ILAR-03116
	3000K	2195lm/m				ILAR-03118
	4000K	2195lm/m				ILAR-03120
	6000K	2195lm/m				ILAR-03122
22W	2500K	3564lm/m	5m	10mm	IP20	ILAR-03123
	2700K	3564lm/m				ILAR-03125
	3000K	3564lm/m				ILAR-01704
	4000K	3564lm/m				ILAR-01705
	6000K	3564lm/m				ILAR-01706
22W	2500K	3386lm/m	5m	12mm	IP67	ILAR-03124
	2700K	3386lm/m				ILAR-03126
	3000K	3386lm/m				ILAR-01707
	4000K	3386lm/m				ILAR-01708
	6000K	3386lm/m				ILAR-01709

Options (Not included)



Connector-Cable-Connector
8mm IP20 ILAR-01965



Connector-Cable-Connector
12mm IP67 ILAR-01967



Connector Single Color 9 in 1
10mm ILAR-03319



Connector with Screw "T" and "L"
10mm ILAR-03320



Connector with Screw
10mm ILAR-03321



Connector with Screw Single Color
10mm ILAR-03322



Connector "L" Single Color
10mm ILAR-03323



Connector Single Color
10mm ILAR-03324



Connector-Cable Single Color
10mm ILAR-03325



Connector-Cable-Connector Single Color
10mm ILAR-03326



Double Connector 2 Pin
8mm ILAR-01416
10mm ILAR-01417



Connector IP67
12mm
ILAR-01961



Inicial Connector IP67
12mm
ILAR-01962



Connector IP67
10mm
ILAR-01966



Connector+Cable
ILAR-01969

FREE CUT SMD 24V







Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
9.6W	2700K	1280lm/m	5m	8mm	IP20	ILAR-03105
	3000K	1325lm/m				ILAR-03106
	4000K	1360lm/m				ILAR-03107
	6000K	1360lm/m				ILAR-03108
22W	2700K	2850lm/m	5m	10mm	IP20	ILAR-03109
	3000K	2950lm/m				ILAR-03110
	4000K	3035lm/m				ILAR-03111
	6000K	3035lm/m				ILAR-03112

Options (Not included)



Connector Single Color 9 in 1
8mm ILAR-03311
10mm ILAR-03319



Connector with Screw "T" and "L"
8mm ILAR-03312
10mm ILAR-03320



Connector with Screw
8mm ILAR-03313
10mm ILAR-03321



Connector with Screw Single Color
8mm ILAR-03314
10mm ILAR-03322



Connector "L" Single Color
8mm ILAR-03315
10mm ILAR-03323



Connector Single Color
8mm ILAR-03316
10mm ILAR-03324



Connector-Cable Single Color
8mm ILAR-03317
10mm ILAR-03325



Connector-Cable-Connector Single Color
8mm ILAR-03318
10mm ILAR-03326



SLIM SMD 24V







Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
4.8W	2700K	560lm/m	5m	4mm	IP20	ILAR-03075
	3000K	580lm/m				ILAR-03076
	4000K	600lm/m				ILAR-03077
	6000K	600lm/m				ILAR-03078
9.6W	2700K	1140lm/m	5m	6mm	IP20	ILAR-03079
	3000K	1160lm/m				ILAR-03080
	4000K	1180lm/m				ILAR-03081
	6000K	1180lm/m				ILAR-03082

Options (Not included)



Connector
6mm ILAR-03308




Connector-Cable Single Color
6mm ILAR-03309



Connector-Cable-Connector Single Color
6mm ILAR-03310

LARGE SMD 24V







Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20	Surface


Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
25W	2700K	2625lm/m	5m	30mm	IP20	ILAR-03206
	3000K	2625lm/m				ILAR-03207
	4000K	2875lm/m				ILAR-03208
	6000K	2875lm/m				ILAR-03209

COB 24V









Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20 / IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
10W	2700K	950lm/m	5m	8mm	IP20	ILAR-01393
	2700K	950lm/m	50m		IP20	ILAR-02662
	3000K	1000lm/m	5m		IP20	ILAR-02905
	4000K	1000lm/m	5m		IP20	ILAR-01394
	4000K	1000lm/m	50m		IP20	ILAR-02664
	6000K	1050lm/m	5m		IP20	ILAR-01395
10W	2700K	902lm/m	5m	10mm	IP67	ILAR-01396
	3000K	1000lm/m	5m		IP67	ILAR-03519
	4000K	950lm/m	5m		IP67	ILAR-01397
	6000K	998lm/m	5m		IP67	ILAR-02509
15W	2700K	1380lm/m	5m	10mm	IP20	ILAR-01401
	2700K	1380lm/m	50m		IP20	ILAR-02665
	3000K	1500lm/m	5m		IP20	ILAR-02908
	4000K	1455lm/m	5m		IP20	ILAR-01402
	4000K	1455lm/m	50m		IP20	ILAR-02666
	6000K	1530lm/m	5m		IP20	ILAR-01403
15W	2700K	1311lm/m	5m	12mm	IP67	ILAR-01404
	3000K	1000lm/m	5m		IP67	ILAR-03131
	4000K	1382lm/m	5m		IP67	ILAR-01405
	6000K	1453lm/m	5m		IP67	ILAR-02508

Options (Not included)



Connector Single Color 9 in 1
8mm ILAR-03311
10mm ILAR-03319



Connector with Screw "T" and "L"
8mm ILAR-03312
10mm ILAR-03320



Connector with Screw
8mm ILAR-03313
10mm ILAR-03321



Connector with Screw Single Color
8mm ILAR-03314
10mm ILAR-03322



Connector "L" Single Color
8mm ILAR-03315
10mm ILAR-03323



Connector Single Color
8mm ILAR-03316
10mm ILAR-03324



Connector-Cable Single Color
8mm ILAR-03317
10mm ILAR-03325



Connector-Cable-Connector Single Color
8mm ILAR-03318
10mm ILAR-03326



Double Connector 2 Pin
8mm ILAR-01416
10mm ILAR-01417



Connector IP67
12mm
ILAR-01961



Inicial Connector IP67
12mm
ILAR-01962



Connector IP67
10mm
ILAR-01966



Connector+Cable


ILAR-01969




Connector-Cable-Connector
12mm IP67 ILAR-01967

SCOB 24V







Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20 / IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
15W	2700K	1950lm/m	5m	10mm	IP20	ILAR-03146
	3000K	1950lm/m	5m		IP20	ILAR-03147
	4000K	1950lm/m	5m		IP20	ILAR-03148
	6000K	1950lm/m	5m		IP20	ILAR-03149
15W	2700K	1950lm/m	5m	12mm	IP67	ILAR-03150
	3000K	1950lm/m	5m		IP67	ILAR-03151
	4000K	1950lm/m	5m		IP67	ILAR-03152
	6000K	1950lm/m	5m		IP67	ILAR-03153

Options (Not included)



Connector-Cable-Connector
8mm IP20 ILAR-01965



Connector-Cable-Connector
12mm IP67 ILAR-01967



Connector Single Color 9 in 1
10mm ILAR-03319



Connector with Screw "T" and "L"
10mm ILAR-03320



Connector with Screw
10mm ILAR-03321



Connector with Screw Single Color
10mm ILAR-03322



Connector "L" Single Color
10mm ILAR-03323



Connector Single Color
10mm ILAR-03324



Connector-Cable Single Color
10mm ILAR-03325




Connector-Cable-Connector Single Color
10mm ILAR-03326



FREE CUT COB 24V





Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20 / IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
13W	2700K	845lm/m	5m	8mm	IP20	ILAR-03095
	3000K	949lm/m	5m		IP20	ILAR-03096
	4000K	962lm/m	5m		IP20	ILAR-03097
	6000K	962lm/m	5m		IP20	ILAR-03098
13W	2700K	760lm/m	5m	8mm	IP65	ILAR-03099
	3000K	854lm/m	5m		IP65	ILAR-03100
	4000K	865lm/m	5m		IP65	ILAR-03101
	6000K	865lm/m	5m		IP65	ILAR-03102

Options (Not included)



Connector Single Color 9 in 1
8mm ILAR-03311



Connector with Screw "T" and "L"
8mm ILAR-03312



Connector with Screw
8mm ILAR-03313



Connector with Screw Single Color
8mm ILAR-03314



Connector "L" Single Color
8mm ILAR-03315



Connector Single Color
8mm ILAR-03316

Connector-Cable Single Color
8mm ILAR-03317

Connector-Cable-Connector Single Color
8mm ILAR-03318

COB SLIM 24V





Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
7W	2700K	679lm/m	2.5m	3mm	IP20	ILAR-03087
	3000K	735lm/m	2.5m			ILAR-03088
	4000K	756lm/m	2.5m			ILAR-03089
	6000K	756lm/m	2.5m			ILAR-03090
7W	2700K	721lm/m	5m	5mm	IP20	ILAR-03091
	3000K	721lm/m	5m			ILAR-03092
	4000K	740lm/m	5m			ILAR-03093
	6000K	740lm/m	5m			ILAR-03094

Options (Not included)



Connector "L" Single Color
5mm ILAR-03528




Connector Single Color
5mm ILAR-03529

Connector-Cabo Single Color
5mm ILAR-03530

Connector-Cabo-Connector Single Color
5mm ILAR-03531

COB LARGE 24V





Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
40W	2700K	3600lm	5m	30mm	IP20	ILAR-03202
	3000K	3800lm				ILAR-03203
	4000K	4160lm				ILAR-03204
	6000K	4160lm				ILAR-03205

SMD CCT CHANGE 24V






Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20 / IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
19W	1800K-3000K	800-900lm/m	5m	10mm	IP20	ILAR-03103
19W	1800K-3000K	720-810lm/m	5m	10mm	IP65	ILAR-03104

CSP CCT TUNABLE 24V





Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20 / IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
19W	CCT 2700K-6000K	1750lm/m	5m	10mm	IP20	ILAR-01686
19W	CCT 2700K-6000K	1750lm/m	5m	10mm	IP67	ILAR-01687

Options (Not included)



Connector "L" CCT
10mm ILAR-03330

Connector CCT
10mm ILAR-03331



Connector-Cabo CCT
10mm ILAR-03332



Connector-Cabo-Connector CCT
10mm ILAR-03333

Connector CCT
10mm ILAR-01972



Connector-Cabo CCT
10mm ILAR-01973



Connector CCT IP67
10mm ILAR-01974

Connector-Cabo CCT IP67
10mm ILAR-01975

PROSTRIP SMD RGB 24V





Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
14.4W	RGB	500lm/m	5m	10mm	IP20	ILAR-00638
14.4W	RGB	500lm/m	5m	10mm	IP65	ILAR-00831

Options (Not included)



Double Connector-Cabo
4 Pin RGB
10mm ILAR-00641



Double Connector
4 Pin RGB
10mm ILAR-00642



Connector
RGB
10mm ILAR-03487




Connector-Cabo
RGB
10mm ILAR-03488



Connector-Cabo-Connector
RGB
10mm ILAR-03489

COB RGB 24V





Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20 / IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
20W	RGB	750lm/m	5m	10mm	IP20	ILAR-03136
20W	RGB	750lm/m	5m	12mm	IP67	ILAR-03137

Options (Not included)



Connector
RGB
10mm ILAR-03490



Connector-Cabo
RGB
10mm ILAR-03491



Connector-Cabo-Connector
RGB
10mm ILAR-03492

SMD RGBW 24V





Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20 / IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
20W	RGBW	1600lm/m	5m	12mm	IP20	ILAR-03132
20W	RGBW	1600lm/m	5m	14mm	IP67	ILAR-03133

Options (Not included)



Connector
RGBW
12mm ILAR-03493




Connector-Cabo
RGBW
12mm ILAR-03494




Connector-Cabo-Connector
RGBW
12mm ILAR-03495

COB PRO RGBW (4000K) 24V







Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20 / IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
20W	RGBW (4000K)	900lm/m	5m	12mm	IP20	ILAR-01410
20W	RGBW (4000K)	900lm/m	50m	12mm	IP20	ILAR-02667
20W	RGBW (4000K)	900lm/m	5m	14mm	IP67	ILAR-01688

Options (Not included)



Connector
RGBW
ILAR-01970



Connector
RGBW
12mm ILAR-03496



Connector-Cabo
RGBW
12mm ILAR-03497



Connector-Cabo-Connector
RGBW
12mm ILAR-03498

SMD RGB+CCT (2700-6500K) 24V





Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20 / IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
20W	RGB+CCT (2700-6500K)	70-155lm/m	5m	12mm	IP20	ILAR-01689
20W	RGB+CCT (2700-6500K)	70-155lm/m	5m	12mm	IP65	ILAR-01690

Options (Not included)



Connector IP20
RGB+CCT
12mm ILAR-01978



Connector-Cable
RGB+CCT
12mm ILAR-01979



Connector
RGB+CCT
12mm ILAR-03499



Connector-Cabo
RGB+CCT
12mm ILAR-03500





Connector-Cabo-Connector
RGB+CCT
12mm ILAR-03501



COB RGB+CCT 24V







Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20 / IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
20W	RGB+CCT	1200lm/m	5m	12mm	IP20	ILAR-03134
20W	RGB+CCT	1200lm/m	5m	14mm	IP67	ILAR-03135

Options (Not included)



Connector
RGB+CCT
12mm ILAR-03502



Connector-Cabo
RGB+CCT
12mm ILAR-03503



Connector-Cabo-Connector
RGB+CCT
12mm ILAR-03504



SPECIAL LED STRIP


24V

ALL LIGHTING SOLUTIONS

EXTRA WARM 24V







Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20 / IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
14W	1800K	1190lm/m	5m	10mm	IP20	ILAR-01399
	2200K	1218lm/m			IP20	ILAR-01400
	2500K	1260lm/m			IP20	ILAR-03128
14W	1800K	1130lm/m	5m	10mm	IP67	ILAR-01514
	2200K	1157lm/m			IP67	ILAR-01515
	2500K	1260lm/m	5m	12mm	IP67	ILAR-03129

Options (Not included)



Connector Single Color
10mm ILAR-03319



Connector with Screw "T" and "L"
10mm ILAR-03320



Connector with Screw
10mm ILAR-03321



Connector with Screw Single Color
10mm ILAR-03322



Connector "L" Single Color
10mm ILAR-03323



Connector Single Color
10mm ILAR-03324



Connector-Cable Single Color
10mm ILAR-03325




Connector-Cable-Connector Single Color
10mm ILAR-03326



Double Connector 2 Pin
10mm ILAR-01417



Connector+Cable
ILAR-01969

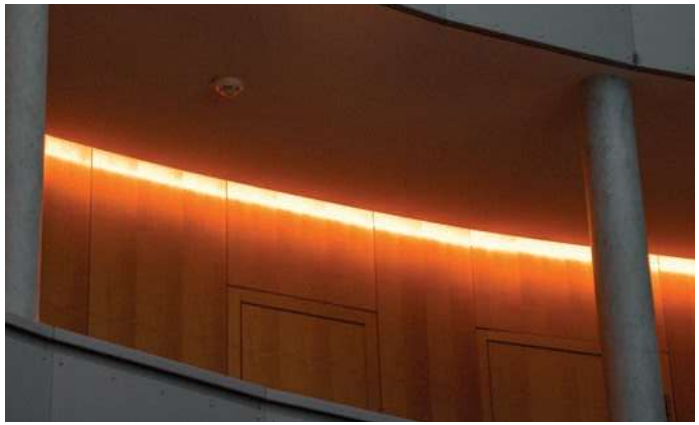

ZIGUEZAGUE 24V




Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20 / IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
4.8W	2700K	460lm/m	5m	6mm	IP20	ILAR-03083
	3000K	480lm/m	5m			ILAR-03084
	4000K	505lm/m	5m			ILAR-03085
	6000K	505lm/m	5m			ILAR-03086
8W	RGB	480lm/m	5m	10mm	IP65	ILAR-03154
12W	2700K	876lm/m	3m	6mm	IP20	ILAR-03198
	3000K	972lm/m	3m			ILAR-03199
	4000K	996lm/m	3m			ILAR-03200
	6000K	996lm/m	3m			ILAR-03201

SIDEVIEW 24V








Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20 / IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
15W	2700K	1650lm/m	5m	10mm	IP20	ILAR-03138
	3000K	1650lm/m				ILAR-03139
	4000K	1650lm/m				ILAR-03140
	6000K	1650lm/m				ILAR-03141
15W	2700K	1650lm/m	5m	12mm	IP67	ILAR-03142
	3000K	1650lm/m				ILAR-03143
	4000K	1650lm/m				ILAR-03144
	6000K	1650lm/m				ILAR-03145

DIM TO WARM 24V





Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
10W	1900K-3000K	60-1100lm/m	5m	10mm	IP20	ILAR-03072

SAUNA 24V

Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
10W	2700K	840lm/m	5m	10mm	IP67	ILAR-02326
	4000K	980lm/m				ILAR-02327
	6500K	980lm/m				ILAR-02328
10W	2700K	840lm/m	5m	12mm	IP67	ILAR-02621
	4000K	980lm/m				ILAR-02622
	6500K	980lm/m				ILAR-02623

Options (Not included)

End Cap
10mm ILAR-02554



Connector-Cabo Jumper - 20cm
12mm ILAR-02555



Connector-Cabo
12mm ILAR-02556

End Cap
12mm ILAR-02624



SPI DIGITAL COB/SMD 24V







Voltage	Beam Angle	IP	Mounting Type
24V	120°	IP20	Surface

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
COB	12W	2700K	807lm/m	5m	10mm	IP20	ILAR-03249
COB	12W	3000K	807lm/m		10mm	IP20	ILAR-03250
COB	12W	4000K	892lm/m		12mm	IP20	ILAR-03064
COB	12W	6000K	843lm/m		10mm	IP20	ILAR-03251
COB	12W	CCT 2700K-6500K	843lm/m		10mm	IP20	ILAR-03252
SMD	11W	RGBW	460lm/m	5m	10mm	IP20	ILAR-01703
SMD	22W	RGB	880lm/m		10mm	IP20	ILAR-02334
SMD	22W	RGB	600lm/m		12mm	IP20	ILAR-02335

Options (Not included)

Connector COB
ILAR-02510



Connector-Cabo-Connector COB
ILAR-02511



Connector SMD
ILAR-02512



Connector-Cabo SMD
ILAR-02513



Connector-Cabo COB
ILAR-02594



Connector-Cabo SMD
ILAR-02595




NEON

TUBES

ALL LIGHTING SOLUTIONS

TUBO NEON 360° Ø25MM 24V





Voltage	Beam Angle	IP	Mounting Type
24V	360°	IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
20W	RGB	1320lm/m	5m	Ø25mm	IP67	ILAR-01691
	RGB	1320lm/m	10m	Ø25mm	IP67	ILAR-02303
20W	2700K	1320lm/m	5m	Ø25mm	IP67	ILAR-01692
	2700K	1320lm/m	10m	Ø25mm	IP67	ILAR-02304
20W	4000K	1495lm/m	5m	Ø25mm	IP67	ILAR-01693
	4000K	1495lm/m	10m	Ø25mm	IP67	ILAR-02305

Options (Not included)




Inicial Cap
ILAR-01694



Clip
ILAR-01695

TUBO NEON 160° 13X12MM 24V



Voltage	Beam Angle	IP	Mounting Type
24V	160°	IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
10W	2400K	714lm/m	5m	13x12mm	IP67	ILAR-01696
	4000K	850lm/m	5m	13x12mm	IP67	ILAR-01697
10W	2400K	714lm/m	10m	13x12mm	IP67	ILAR-02307
	4000K	850lm/m	10m	13x12mm	IP67	ILAR-02308
10W	RGB	850lm/m	5m	13x12mm	IP67	ILAR-01698
	RGB	850lm/m	10m	13x12mm	IP67	ILAR-02306

Options (Not included)



Kit Inicial/End Cap
ILAR-01699



Clip
ILAR-01700

NEON WALL WASHER 24V



Voltage	Beam Angle	IP	Mounting Type
24V	20° / 15x40°	IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
-	3000K	1956lm/m	5m	24x18mm	IP67	ILAR-03243
	RGBW	490lm/m	5m	24x18mm	IP67	ILAR-03244

Options (Not included)



Track 1M
ILAR-03557



Bendable Track 1M
ILAR-03558



Clip
ILAR-03559

End Cap
ILAR-03560

MODULAR WALL WASHER FLEXIBLE 24V





Voltage	Beam Angle	IP	Mounting Type
24V	20° / 15x40°	IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Beam Angle	Roll	Width	IP	SKU
-	3000K	2600lm/m	20°	2,4m	30x21mm	IP67	ILAR-03245
	3000K	2226lm/m	15x40°	2,4m	30x21mm	IP67	ILAR-03246
	RGBW	585lm/m	20°	2,4m	30x21mm	IP67	ILAR-03247
	RGBW	440lm/m	15x40°	2,4m	30x21mm	IP67	ILAR-03248

Options (Not included)



Bendable Track 1.2m
ILAR-03561



Clip Wall
ILAR-03562



Anti-Glare Cover
ILAR-03563

NEON 16X16 24V



Voltage	Beam Angle	IP	Mounting Type
24V	-	IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Cut	Width	IP	SKU
16W/m	2700K	1600lm/m	m*	16x16mm	IP67	ILAR-03210
16W/m	3000K	1632lm/m	m*		IP67	ILAR-03211
16W/m	4000K	1664lm/m	m*		IP67	ILAR-03212
16W/m	6000K	1664lm/m	m*		IP67	ILAR-03213
10W/m	RGB	250lm/m	m*		IP67	ILAR-03214
16W/m	2700K	1600lm/m	5m	16x16mm	IP67	ILAR-03334
16W/m	3000K	1632lm/m	5m		IP67	ILAR-03442
16W/m	4000K	1664lm/m	5m		IP67	ILAR-03436
16W/m	6000K	1664lm/m	5m		IP67	ILAR-03440
10W/m	RGB	250lm/m	5m		IP67	ILAR-03441
10W/m	2700K	650lm/m	20m	16x16mm	IP67	ILAR-03215
10W/m	3000K	670lm/m	20m		IP67	ILAR-03216
10W/m	4000K	700lm/m	20m		IP67	ILAR-03217
10W/m	6000K	700lm/m	20m		IP67	ILAR-03218

*Cutting Patterns - 2 To 3 Weeks for Delivery

Options (Not included)



Input Cap Straight
ILAR-03465

Input Cap Botton
ILAR-03466

End Cap
ILAR-03467



Bracket
ILAR-03468



Bendable Track 1M
ILAR-03469



Track 1M
ILAR-03470

Input Cable 2x 0,75mm 2-0,35m
ILAR-03456

Input Cable RGB 4x0,5mm 2-0,35m
ILAR-03457



NEON SIDE VIEW 10X18 24V



Voltage	Beam Angle	IP	Mounting Type
24V	-	IP67	Surface

Model	Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Cut	Width	SKU
Side View	14W	2700K	560lm/m	m*	10x18mm	ILAR-03223
Side View	14W	3000K	565lm/m	m*	10x18mm	ILAR-03224
Side View	14W	4000K	580lm/m	m*	10x18mm	ILAR-03225
Side View	14W	6000K	580lm/m	m*	10x18mm	ILAR-03226
Side View	14W	2700K	560lm/m	5m	10x18mm	ILAR-03437
Side View	14W	3000K	565lm/m	5m	10x18mm	ILAR-03438
Side View	14W	4000K	580lm/m	5m	10x18mm	ILAR-03439
Side View	14W	6000K	580lm/m	5m	10x18mm	ILAR-03443
Side View Long Range	9.6W	2700K	400lm/m	20m	10x18mm	ILAR-03230
Side View Long Range	9.6W	3000K	419lm/m	20m	10x18mm	ILAR-03231
Side View Long Range	9.6W	4000K	439lm/m	20m	10x18mm	ILAR-03232
Side View Long Range	9.6W	6000K	439lm/m	20m	10x18mm	ILAR-03233
Side View CCT Change	19.2W	CCT 2700-6000K	500-511lm/m	m*	10x18mm	ILAR-03227
Side View CCT Change	19.2W	CCT 2700-6000K	500-511lm/m	5m	10x18mm	ILAR-03444
Side View	14W	RGB	193lm/m	m*	10x18mm	ILAR-03228
Side View	14W	RGB	193lm/m	5m	10x18mm	ILAR-03445
Side View	14W	RGBW (3000K)	180lm/m	m*	10x18mm	ILAR-03229
Side View	14W	RGBW (3000K)	180lm/m	5m	10x18mm	ILAR-03446
Side View SPI Digital	14W	RGB	52lm/w	m*	10x18mm	ILAR-03234
Side View SPI Digital	14W	RGB	52lm/w	5m	10x18mm	ILAR-03447

*Cutting Patterns - 2 To 3 Weeks for Delivery

Options (Not included)

Input Cap Straight
ILAR-03471

Input Cap Botton
ILAR-03472

Input Cap Side
ILAR-03473

End Cap
ILAR-03474



Bracket
ILAR-03475



Track 1m
ILAR-03476



Bendable Track 1m
ILAR-03477

Input Cable 2x 0,75mm 2-0,35m
ILAR-03456

Input Cable
2x 0,75mm 2-0,35m
ILAR-03458

Input Cable
3x 0,75mm 2-0,35m
ILAR-03459

Input Cable RGB
4x 0,5mm 2-0,35m
ILAR-03460

Input Cable RGBW
5x 0,3mm 2-0,35m
ILAR-03461

Input Cable RGB SPI
4x 0,5mm 2-0,35m
ILAR-03462

NEON SIDE VIEW 10X18 230V



Voltage	Beam Angle	IP	Mounting Type
230V	-	IP65	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Cut	Width	IP	SKU
14W/m	2700K	490lm/m	m*	10x18mm	IP65	ILAR-03219
14W/m	3000K	504lm/m	m*	10x18mm	IP65	ILAR-03220
14W/m	4000K	532lm/m	m*	10x18mm	IP65	ILAR-03221
14W/m	6000K	532lm/m	m*	10x18mm	IP65	ILAR-03222

*Cutting Patterns - 2 To 3 Weeks for Delivery

NEON TOP VIEW 06X06 24V



Voltage	Beam Angle	IP	Mounting Type
24V	-	IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Cut	Width	IP	SKU
8W/m	2700K	440lm/m	m*	06x06mm	IP67	ILAR-03235
8W/m	3000K	455lm/m	m*	06x06mm	IP67	ILAR-03236
8W/m	4000K	470lm/m	m*	06x06mm	IP67	ILAR-03237
8W/m	6000K	470lm/m	m*	06x06mm	IP67	ILAR-03238
8W/m	2700K	440lm/m	5m	06x06mm	IP67	ILAR-03448
8W/m	3000K	455lm/m	5m	06x06mm	IP67	ILAR-03449
8W/m	4000K	470lm/m	5m	06x06mm	IP67	ILAR-03450
8W/m	6000K	470lm/m	5m	06x06mm	IP67	ILAR-03451

*Cutting Patterns - 2 To 3 Weeks for Delivery

Options (Not included)

Input Cable 2 Wires - 0,35m
ILAR-03463



Input Cap Straight
ILAR-03482

Input Cap Botton
ILAR-03483

End Cap
ILAR-03484



Bracket
ILAR-03485



Track 1m
ILAR-03486

NEON SIDE VIEW 03X08 24V



Voltage	Beam Angle	IP	Mounting Type
24V	-	IP67	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Cut	Width	IP	SKU
6W/m	2700K	120lm/m	m*	03x08mm	IP67	ILAR-03239
6W/m	3000K	135lm/m	m*	03x08mm	IP67	ILAR-03240
6W/m	4000K	135lm/m	m*	03x08mm	IP67	ILAR-03241
6W/m	6000K	135lm/m	m*	03x08mm	IP67	ILAR-03242
6W/m	2700K	120lm/m	5m	03x08mm	IP67	ILAR-03452
6W/m	3000K	135lm/m	5m	03x08mm	IP67	ILAR-03453
6W/m	4000K	135lm/m	5m	03x08mm	IP67	ILAR-03454
6W/m	6000K	135lm/m	5m	03x08mm	IP67	ILAR-03455

*Cutting Patterns - 2 To 3 Weeks for Delivery

Options (Not included)

Input Cable 2 Wires - 0,2m
ILAR-03464



Input Cap Straight
ILAR-03478

End Cap
ILAR-03479



Bracket
ILAR-03480



Track 1M
ILAR-03481

NEON PISCINA 24V



Voltage	Beam Angle	IP	Mounting Type
24V	-	IP68	Surface

Power	Colour Temperature (CCT)	Total Luminous Flux (±5%)	Roll	Width	IP	SKU
10W	2700K	770lm/m	5m	15x10,5mm	IP68	ILAR-02329
10W	4000K	880lm/m	5m	15x10,5mm	IP68	ILAR-02330
10W	2700K	770lm/m	10m	15x10,5mm	IP68	ILAR-02331
10W	4000K	880lm/m	10m	15x10,5mm	IP68	ILAR-02332
10W	RGB	525lm/m	5m	15x10,5mm	IP68	ILAR-02333

Options (Not included)



Clip
ILAR-02514



Track Polycarbonate 1,22M
ILAR-02515

CONTROLLERS

CONTROLADORES

ALL LIGHTING SOLUTIONS

WIRELESS (RF)







	Kit 2 in 1 Single Color	Kit 3 in 1 RGB/RGBW/RGB+CCT	2 in 1 1 Color/CCT	3 in 1 RGB/RGBW/RGB+CCT	5 in 1 - 1 Color/CCT/ RGB/RGBW/RGB+CCT
Working Voltage	12-24V	12-24V	12-24V	12-24V	12-24-48V
Output	12A/Channel	6A/Channel	12A/Channel	6A/Channel	6A/Channel
Total Output	Max 12A	Max 12A	Max 12A	Max 12A	Max 15A
RF	2.4GHz	2.4GHz	2.4GHz	2.4GHz	2.4GHz
Control Distance	30m	30m	30m	30m	30m
Voltage Remote	3V (AAA *2pcs)	3V (AAA *2pcs)	-	-	-
SKU	ILAR-02887	ILAR-02578	ILAR-01776	ILAR-01779	ILAR-01428







	Fast 2 in 1 1 Color/CCT	Fast 3 in 1 RGB/RGBW/RGB+CCT	1 Color 0/1-10V+Push Dim	Panel 1 Color	Panel CCT
Working Voltage	12-24V	12-24V	12-24V	12-24V	12-24V
Output	12A/Channel	6A/Channel	12A/Channel	5A/Channel	5A/Channel
Total Output	Max 12A	Max 12A	Max 12A	10A	10A
RF	2.4GHz	2.4GHz	2.4GHz	2.4GHz	2.4GHz
Control Distance	30m	30m	30m	30m	30m
Control Option	-	-	0/1-10V / Push Dimming	-	-
SKU	ILAR-02280	ILAR-02279	ILAR-01445	ILAR-01725	ILAR-01726







	Panel 3 in 1 RGB/RGBW/RGB+CCT	Din 1 Color/CCT/RGB/ RGBW/CCT	Module Triac+Push Dim 300W	Module Triac+Push Dim 500W	1 Color High Voltage
Working Voltage	12-24V	12-24V	AC220-240V	AC220-240V	AC220-240V
Output	10A	6A/Channel	AC220-240V	AC220-240V	DC 220V
Total Output	10A	Max 10A	Max 1.36A	Max 2.27A	Max 1.82A
RF	2.4GHz	2.4GHz	2.4GHz	2.4G	2.4GHz
Rated Power	-	-	Max 300W	Max 500W	Max 400W
Control Distance	30m	30m	30m	30m	30m
Control Option	-	-	Push Dimming	Push dimming	-
SKU	ILAR-01727	ILAR-01994	ILAR-01447	ILAR-02608	ILAR-01995





	CCT High Voltage	RGB High Voltage	Gateway Wireless
Working Voltage	AC220-240V	AC220-240V	-
Input	-	-	DC5V/500mA (Type-C)
Output	DC 220V	DC 220V	-
Total Output	Max 1.82A	Max 1.82A	-
RF	2.4GHz	2.4GHz	2.4GHz+WiFi
Rated Power	Max 400W	Max 400W	-
Control Distance	30m	30m	30m
SKU	ILAR-01996	ILAR-01997	ILAR-02600

WIRELESS + WIFI







	2 in 1 1 Color/CCT	5 in 1 - 1 Color/CCT/ RGB/RGBW/RGB+CCT	Fast 2 in 1 1 Color/CCT	Fast 3 in 1 RGB/RGBW/RGB+CCT	5 in 1 - 1 Color/CCT/ RGB/RGBW/RGB+CCT
Working Voltage	12-24V	12-24V	12-24V	12-24V	12-24-48V
Output	12A/Channel	6A/Channel	12A/Channel	12A/Channel	10A/Channel
Total Output	Max 12A	Max 15A	Max 12A	Max 12A	Max 20A
RF	2.4GHz	2.4GHz	2.4GHz	2.4GHz	2.4GHz
Control Distance	30m	30m	30m	30m	30m
Wifi/Bluetooth	WiFi/Bluetooth 4.2	WiFi/Bluetooth 4.2	WiFi/Bluetooth 4.2	WiFi/Bluetooth 4.2	WiFi/Bluetooth 4.2
SKU	ILAR-01885	ILAR-01427	ILAR-01986	ILAR-01987	ILAR-02272







	5 in 1 - 1 Color/CCT/ RGB/RGBW/RGB+CCT	5 in 1 - 1 Color/CCT/ RGB/RGBW/RGB+CCT IP67	1 Color With Power SUPPLY 75W	RGB + CCT With Power Supply 75W	RGBW With Power Supply 75W
Working Voltage	12-24-48V	12-24-48V	AC220-240V	AC220-240V	AC220-240V
Output	15A/Channel	10A/Channel	24Vdc	24Vdc	24Vdc
Total Output	Max 30A	Max 20A	Max 3A	Max 3A	Max 3A
RF	2.4GHz	2.4GHz	2.4GHz	2.4GHz	2.4GHz
Control Distance	30m	30m	30m	30m	30m
Wifi/Bluetooth	WiFi/Bluetooth 4.2	WiFi/Bluetooth 4.2	WiFi/Bluetooth 4.2	WiFi/Bluetooth 4.2	WiFi/Bluetooth 4.2
SKU	ILAR-02273	ILAR-01619	ILAR-01437	ILAR-01438	ILAR-01618






	1 Color With Power Supply 150W IP67	Controller 5 in 1 With Power Supply 150W	Module Triac+Push Dim 300W	Module Triac+Push Dim+Wireless
Working Voltage	AC220-240V	AC220-240V	AC220-240V	AC220-240V
Output	24V	24V	AC220-240V	AC220-240V
Total Output	Max 6.25A	Max 6.25A	Max 1.36A (300W)	Max 2.27A (500W)
RF	2.4GHz	2.4GHz	2.4GHz	2.4GHz
Control Distance	30m	30m	30m	30m
Control Option	Push dimming	Push dimming	Push dimming	Push dimming
Wifi/Bluetooth	WiFi/Bluetooth 4.2	WiFi/Bluetooth 4.2	WiFi/Bluetooth 4.2	WiFi/Bluetooth 4.2
SKU	ILAR-01616	ILAR-03582	ILAR-01993	ILAR-02609

WIRELESS + ZIGBEE







	2 in 1 1 Color/CCT	3 in 1 RGB/RGBW/RGBCCT	5 in 1 1 Color/CCT/RGB/RGBCCT	Fast 2 in 1 1 Color/CCT	Fast 3 in 1 RGB/RGBW/RGB+CCT
Working Voltage	12-24V	12-24V	12-24-48V	12-24V	12-24V
Output	12A/Channel	6A/Channel	6A/Channel	12A/Channel	12A/Channel
Total Output	Max 12A	Max 12A	Max 15A	Max 12A	Max 12A
RF	2.4GHz	2.4GHz	2.4GHz	2.4GHz	2.4GHz
Control Distance	30m	30m	30m	30m	30m
Conection Mode	ZigBee	ZigBee	ZigBee	ZigBee	ZigBee
SKU	ILAR-01777	ILAR-01787	ILAR-01620	ILAR-02277	ILAR-02276

WIRELESS + ZIGBEE





	5 in 1 – 1 Color/CCT/ RGB/RGBW/RGB+CCT	Module Triac+Push Dim 300W	Module Triac+Push Dimm+Wireless+ZigBee	Gateway Zigbee Zigbee 3.0 + BLE
Working Voltage	12-24-48V	AC220~240V	AC220~240V	5V (1A) MICRO USB
Output	10A/Channel	AC220~240V	AC220~240V	-
Total Output	Max 20A	Max 1.36A (300W)	Max 2.27A (500W)	-
RF	2.4GHz	2.4GHz	2.4G	ZigBee
Control Distance	2.4G 30m / Zigbee 100m	2.4G 30m / Zigbee 100m	2.4G 30m / Zigbee 100m	30m Indoor / 100m Outdoor
Conection Mode	ZigBee	ZigBee	ZigBee	WiFi
SKU	ILAR-02278	ILAR-01615	ILAR-02610	ILAR-01780

WIRELESS






	Remote 1 Color	Remote 1 Color	Remote CCT	Remote CCT	Remote CCT
Working Voltage	3V (CR2033 Battery-1pc)	3V (CR2033 Battery-1pc)	3V (CR2032 Battery-1pc)	3V (CR2032 Battery-1pc)	3V (CR2032 Battery-1pc)
RF	2.4GHz	2.4GHz	2.4GHz	2.4GHz	2.4GHz
Control Distance	30m	30m	30m	30m	30m
Color	White	Black	White	Black	White
SKU	ILAR-01448	ILAR-01449	ILAR-01991	ILAR-01992	ILAR-02281







	Remote CCT	Remote 1 Color	Remote 1 Color/CCT	Remote 1 Color/CCT 4 Zones	Remote RGB + CCT
Working Voltage	3V (CR2033 Battery-1pc)	3V (AAA Battery-2pcs)	3V (AAA Battery-2pcs)	3V (AAA Battery-2pcs)	3V (AAA Battery-2pcs)
RF	2.4GHz	2.4GHz	2.4GHz	2.4GHz	2.4GHz
Control Distance	30m	30m	30m	30m	30m
Color	Black	White	White	White	White
SKU	ILAR-02313	ILAR-01429	ILAR-02471	ILAR-01989	ILAR-02049







	Remote RGB/RGBW/ RGB+CCT 4 Zones	Panel RGB+CCT	Panel 1 Color 4 Zones	Panel 1 Color 4 Zones	Panel 1 Color 4 Zones
Working Voltage	3V (AAA Battery-2pcs)	3V (AAA Battery-2pcs)	3V (AAA Battery-2pcs)	3V (AAA Battery-2pcs)	AC220~240V
RF	2.4GHz	2.4GHz	2.4GHz	2.4GHz	2.4GHz
Control Distance	30m	30m	30m	30m	30m
Color	White	White	White	White	White
SKU	ILAR-01990	ILAR-01431	ILAR-02051	ILAR-01430	ILAR-01439

WIRELESS







	Panel CCT 4 Zones	Panel CCT 4 Zones	Panel RGBW 4 Zones	Panel RGBW 4 Zones	Panel RGB+CCT 4 Zones
Working Voltage	3V (AAA Battery-2pcs)	AC220~240V	3V (AAA Battery-2pcs)	AC220~240V	3V (AAA Battery-2pcs)
RF	2.4GHz	2.4GHz	2.4GHz	2.4GHz	2.4GHz
Control Distance	30m	30m	30m	30m	30m
Color	White	White	White	White	White
SKU	ILAR-01622	ILAR-01720	ILAR-01988	ILAR-01440	ILAR-01911







	Panel RGB+CCT 4 Zones	Panel RGB+CCT 8 Zones	Remote RGB+CCT 4 Zones	Remote RGB+CCT 8 Zones	CCT (Rotate) 4 Zones
Working Voltage	AC220~240V	3V (AAA 2Pcs) / DC3.3V	3V (AAA Battery-2pcs)	3V (AAA Battery-2pcs)	3V (AAA Battery-2pcs)
RF	2.4GHz	2.4GHz	2.4GHz	2.4GHz	2.4GHz
Control Distance	30m	30m	30m	30m	30m
Color	White	White	White	White	White
SKU	ILAR-01912	ILAR-01882	ILAR-01672	ILAR-01872	ILAR-01883







	CCT 4 Zones	Dimming & CCT Change	ON/OFF – Smart Plug & Switch	Remote Wireless C3(Dimming & CCT Change)	Remote Wireless C4 RGB+CCT
Working Voltage	3V (AAA Battery-2pcs)	3V (AAA 2Pcs) / DC3.3V	3V (AAA Battery-2pcs)	3V (AAA Battery-2pcs)	3V (AAA Battery-2pcs)
RF	2.4GHz	2.4GHz	2.4GHz	2.4GHz	2.4GHz
Control Distance	30m	30m	30m	30m	30m
Color	White	Black	Black	Black	Black
SKU	ILAR-01884	ILAR-02275	ILAR-02274	ILAR-03583	ILAR-03584

	RGB+CCT 433MHZ
Working Voltage	3V (AAA Battery-2pcs)
RF	433MHz
Control Distance	2000m (open area)
Color	White
SKU	ILAR-01881

OTHER CONTROLLERS

					
	Pixel/SPI RGB/RGBW Wifi+Wireless	**Remote Pixel/SPI RGB/ RGBW**	**Controller SPI Single Colour+Remote**	**Controller SPI CCT Change+Remote**	**Mini Controller SPI Single/RGB/RGBW**
Working Voltage	5-24V	3VDC (CR2032)	12-24V	12-24V	DC5V-24V
Output	SPI	-	SPI	SPI	SPI
Total Output	Max 12A	-	-	-	Max 6A
RF	2.4GHz	2.4GHz	2.4GHz	2.4GHz	2.4GHz
Control Distance	30m	30m	30m	30m	30m
Conection Mode	-	-	-	-	-
Wifi/Bluetooth	WiFi/Bluetooth 4.2	-	-	-	-
SKU	ILAR-02092	ILAR-02093	ILAR-03155	ILAR-03288	ILAR-03269

					
	Controller Fita SPI Single/RGB/RGBW	**Remote Wireless Single/RGB/RGBW**	**Remote Wireless Single/RGB/RGBW**	**Controller SPI 5 in 1**	**Remote Wireless SPI Black C9-B**
Working Voltage	DC5V-24V	3V (AAA*2PCS)	3V (AAA*2PCS)	DC5V-24V	3V (AAA*2PCS)
Output	SPI	-	-	SPI	-
Total Output	Max 10A	-	-	Max 10A	-
RF	2.4GHz	2.4GHz	2.4GHz	2.4GHz	2.4GHz
Control Distance	30m	30m	30m	30m	30m
Conection Mode	-	-	-	-	-
Wifi/Bluetooth	-	-	-	WiFi	-
SKU	ILAR-03268	ILAR-03272	ILAR-03273	ILAR-03512	ILAR-03513

					
	Remote Wireless SPI	**Controller SPI 5 in 1 4Ch**	**Remote Wireless SPI Black C10-B**	**Controller Stair Single Color**	**Controller Stair Single Color**
Working Voltage	3V(2*AAA) / DC3.3V	DC5V-24V	3V (AAA*2PCS)	DC5V-24V	5-24VDC
Output	-	SPI 4Channel	-	DC5V-24V	32 (5-24) VDC
Total Output	-	Max 10A	-	-	-
RF	2.4GHz	2.4GHz	2.4GHz	-	-
Control Distance	30m	30m	30m	3m	3m
Conection Mode	-	-	-	-	-
Wifi/Bluetooth	-	WiFi	-	-	-
SKU	ILAR-03514	ILAR-03749	ILAR-03750	ILAR-03277	ILAR-03278

					
	Controller Stair Bth+2.4CHz	**Module 0-10V/1-10V RF+Push Dimmer**	**Module 0-10V/1-10V WIFI+RF+Push Dimmer**	**Module 0-10V/1-10V 2 CH/ WIFI+RF+Push Dimmer**	**Regulator 0-10V Basic - Black**
Working Voltage	DC24V	AC220-240V	AC220-240V	AC220-240V	0-10V
Output	-	0-10V (20mA)	0-10V (20mA)	2x 0/1-10V	0-10V
Total Output	-	-	-	Max 3A	-
RF	2.4GHz	RF 2.4GHz + Push Dim	Tuya APP + RF + Push Dim	Tuya APP + RF + Push Dim	-
Control Distance	30m	30m	30m	30m	-
Conection Mode	-	-	-	-	-
Wifi/Bluetooth	Bluetooth	-	-	-	-
SKU	ILAR-03274	ILAR-01900	ILAR-01901	ILAR-02021	ILAR-02828

OTHER CONTROLLERS

					
	Module 0-10V/1-10V Zigbee+RF+Push Dimmer	**Regulator Panel RF&DMX512 (230V)**	**Regulator Panel RF&0/1-10V (230V)**	**Panel RF&0/1-10V 4 Zones (230v)**	**Gateway WiFi 433MHz**
Working Voltage	AC220-240V	AC220-240V	AC220-240V	AC220-240V	DC5V/500MA (5.5x2.1mm)
Output	0-10V (20mA)	DMX512, RF 2.4GHz	Max. 3A (AC)	0-10V (20mA)	15dBm
Total Output	-	-	-	20mA/CH	-
RF	Tuya APP + RF + Push Dim	Rotary knob+RF 2.4GHz	Rotary knob+RF 2.4GHz	Touch key+RF 2.4GHz	433MHz
Control Distance	30m	10m	30m	10m	50m / 1000m
Conection Mode	-	-	-	-	WiFi
Wifi/Bluetooth	-	-	-	-	-
SKU	ILAR-01902	ILAR-01903	ILAR-01904	ILAR-01905	ILAR-02283

					
	Mini Switch WiFi+2.4GHz 10A	**PIR Sensor (120°) ZigBee**	**Module Mini Triac 2CH WiFi+Push**	**Module DALI+Push Dimm DBUS100mA**	**5 in 1 - 1 Color/CCT/RGB/ RGBCCT) DALI DT8**
Working Voltage	AC220-240V	CR123A 3V BATTERY	AC220-240V	AC220-240V	12-24V
Output	AC220-240V	-	AC220-240V	16VDC-100mA	6A/Channel
Total Output	Max 10A	-	2x100W	-	Max 20A
RF	2.4GHz	-	APP Tuyasmart/Smart Life	-	-
Control Distance	30m	Detection Distance 7m	10m	-	-
Conection Mode	-	Zigbee 802.15.4	WiFi 2.4GHz	DALI + Push Button	DALI
Wifi/Bluetooth	-	-	-	-	-
SKU	ILAR-01998	ILAR-01624	ILAR-02033	ILAR-03010	ILAR-01442

					
	Module DALI WiFi+RF (24V) DT6/DT7/DT8	**Module DALI&Push Triac 200W**	**Module DALI&Push Triac 200W**	**Painel Regulador Triac&RF**	**Painel Regulador WiFi+RF&TRIAC**
Working Voltage	24VDC	AC220-240V	AC220-240V	AC220-240V	AC220-240V
Output	-	AC220-240V	AC220-240V	AC220-240V	AC220-240V
Total Output	-	200W	200W	200W	200W
RF	2.4GHZ	-	-	2.46GHz	2.4GHz
Control Distance	-	-	-	-	-
Conection Mode	WiFi + RF 2.4GHZ + DALI	DALI to Triac	DALI to Triac	-	WiFi + Rotary knob
Wifi/Bluetooth	-	-	-	-	-
SKU	ILAR-03011	ILAR-03012	ILAR-02669	ILAR-03013	ILAR-03014

					
	Module DALI&Push 0/1-10V	**Mini Switch WiFi 16A Power Meter**	**Curtain Module WiFi (Módulo Para Estores)**	**Module Estores/Cortinas 2 saídas ZigBee**	**Converter 1-10V for DALI with 12v line**
Working Voltage	DALI bus	AC220-240V	AC220-240V	AC220-240V	12V
Output	0/1-10V, 20mA	AC220-240V	AC220-240V	AC220-240V	-
Total Output	-	16A	2x 3A	2x 3A	-
RF	-	-	-	-	-
Control Distance	-	-	-	-	-
Conection Mode	DALI to 0/1-10V	Push Button	Push Button	Push Button	DALI to 0/1-10V
Wifi/Bluetooth	-	WiFi	WiFi	ZigBee	-
SKU	ILAR-03015	ILAR-02060	ILAR-02032	ILAR-02916	ILAR-01753

OTHER CONTROLLERS





	Converter 1-10V for DALI IP67 without 12v line	Disjuntor WiFi Smart 10A with Power Meter	Disjuntor WiFi Smart 16A with Power Meter
Working Voltage	DALI bus	AC220-240V	AC220-240V
Output	-	AC220-240V	AC220-240V
Total Output	-	10A	16A
RF	-	-	-
Control Distance	-	-	-
Conection Mode	DALI to 0/1-10V	-	-
Wifi/Bluetooth	-	WiFi	WiFi
SKU	ILAR-01754	ILAR-02918	ILAR-02919

DALI/DMX







	Controller Master Parede DMX X4 RGBW	Controller Master Parede DMX X5 RGB+CCT	Controller Master Parede DMX X3 RGB	1 Color DMX512 RDM	RGB DMX512 RDM
Working Voltage	100-240V~ 50/60Hz	100-240V~ 50/60Hz	100-240V~ 50/60Hz	12-24V	12-24V
Output	-	-	-	-	3A/Channel
Total Output	-	-	-	Max 20A	Max 18A
RF	2.4GHz	2.4GHz	2.4GHz	Dmx512, RDM	Dmx512, RDM
Conection Mode	-	-	-	Occupy 1 DMX Address	Occupy 3 DMX Address
SKU	ILAR-02569	ILAR-02606	ILAR-02607	ILAR-02123	ILAR-01785




	RGBW DMX512 RDM	RGB+CCT DMX512 RDM
Working Voltage	12-24V	12-24V
Output	4A/Channel	5A/Channel
Total Output	Max 20A	Max 20A
RF	Dmx512, RDM	Dmx512, RDM
Conection Mode	Occupy 4 DMX Address	Occupy 5 DMX Address
SKU	ILAR-01613	ILAR-01786

POWER SUPPLY

12V / 24V / 48V

ALL LIGHTING SOLUTIONS

POWER SUPPLY 12V



Voltage	Body Material
176-264 50-60Hz	Aluminium

Power	V-out	I-out Max	IP	SKU
36W	12V	3A	IP20	ILAR-00900
60W	12V	5A	IP20	ILAR-00901
100W	12V	8.3A	IP67	ILAR-02566
150W	12V	12.5A	IP67	ILAR-02567

POWER SUPPLY 24V



Voltage	Body Material
176-264 50-60Hz	Aluminium

Power	V-out	I-out Max	IP	SKU
36W	24V	1.5A	IP20	ILAR-00902
60W	24V	2.5A	IP20	ILAR-00903
80W	24V	3.33A	IP20	ILAR-00989
100W	24V	4.17A	IP20	ILAR-00904
120W	24V	5A	IP20	ILAR-00905
150W	24V	6.3A	IP20	ILAR-00906
200W	24V	8.3A	IP20	ILAR-00907
250W	24V	10A	IP20	ILAR-01147
320W	24V	13.3A	IP20	ILAR-01148

DIMMABLE TRIAC 0-10V



Voltage	Body Material
175-240 50-60Hz	Aluminium

Power	V-out	I-out Max	IP	SKU
60W	24V	2.5A	IP20	ILAR-01175
100W	24V	4.1A	IP20	ILAR-01176
150W	24V	6.2A	IP20	ILAR-01177
200W	24V	8.3A	IP20	ILAR-01178

POWER SUPPLY 24V IP67



Voltage	Body Material
175-240 50-60Hz	Aluminium

Power	V-out	I-out Max	IP	SKU
36W	24V	1.5A	IP67	ILAR-01181
60W	24V	2.5A	IP67	ILAR-01182
100W	24V	4.17A	IP67	ILAR-01183
150W	24V	6.25A	IP67	ILAR-01243
200W	24V	8.3A	IP67	ARDV-01029

POWER SUPPLY SERIE M 24V IP67



Voltage	Body Material
175-240 50-60Hz	ABS + PC

Power	V-out	I-out Max	IP	SKU
36W	24V	-	IP67	ILAR-03262
60W	24V		IP67	ILAR-03263
100W	24V		IP67	ILAR-03264
150W	24V		IP67	ILAR-03265
200W	24V		IP67	ILAR-03266

ARON PRO LINEAR



Voltage	Body Material
176-264 50-60Hz	Aluminium

Power	V-out	I-out Max	IP	SKU
40W	12V	-	IP67	ILAR-03585
100W	12V		IP67	ILAR-03586
200W	12V		IP67	ILAR-03587
100W	24V		IP67	ILAR-02066
200W	24V		IP67	ILAR-02067
250W	24V		IP67	ILAR-02068
40W	48V		IP67	ILAR-03588
100W	48V		IP67	ILAR-03589
200W	48V		IP67	ILAR-03590

ARON PRO



Voltage	Body Material
176-264 50-60Hz	Aluminium

Power	V-out	I-out Max	IP	SKU
100W	24V	-	IP20	ILAR-02069
250W	24V		IP20	ILAR-02070
350W	24V		IP20	ILAR-02071

ARON PRO DALI+PUSH+0-10V



Voltage	Body Material
176-264 50-60Hz	Aluminium

Power	V-out	I-out Max	IP	SKU
100W	24V	-	IP67	ILAR-02072
200W	24V		IP67	ILAR-02073
250W	24V		IP67	ILAR-02074
100W	24V		IP67	ILAR-03591
200W	24V		IP67	ILAR-03592
300W	24V		IP67	ILAR-03593

ARON PRO TRIAC/0-10V/1-10V



Voltage	Body Material
176-264 50-60Hz	Aluminium

Power	V-out	I-out Max	IP	SKU
100W	24V	-	IP67	ILAR-02075
200W	24V		IP67	ILAR-02076
300W	24V		IP67	ILAR-02077

POWER SUPPLY MEANWELL 24V IP20



Voltage	Body Material
176-264 50-60Hz	Aluminium

Power	V-out	I-out Max	IP	SKU
35W	24V	-	IP20	ILDV-00445
52.8W	24V	2.2A	IP20	ILDV-00033
75W	24V	5A	IP20	ILDV-00444
108W	24V	5A	IP20	ILDV-00034
156W	24V	6.5A	IP20	ILDV-00035
200W	24V	-	IP20	ILDV-00442
350W	24V	-	IP20	ILDV-00443
500W	24V	21A	IP20	ILDV-01138

POWER SUPPLY MEANWELL 24V IP67



Voltage	Body Material
176-264 50-60Hz	Aluminium

Power	V-out	I-out Max	IP	SKU
201.6W	24V	8.4A	IP67	ILDV-00036
350.4W	24V	14.6A	IP67	ILDV-00037
75W	24V	3.1A	IP67	ILDV-00038
100W	24V	4A	IP67	ILDV-00039
150W	24V	6.25A	IP67	ILDV-00040
200W	24V	8.3A	IP67	ILDV-00041
20W	24V		IP67	ILDV-00446
35W	24V		IP67	ILDV-00048
60W	24V		IP67	ILDV-00439
100W	24V		IP67	ILDV-00440
150W	24V		IP67	ILDV-00441
480W	24V	20A	IP67	ILDV-01137

PROFILE LED

ALUMINUM PROFILE

ALL LIGHTING SOLUTIONS

ALUMINUM PROFILE FOR LED STRIP

		Installation	Length	Width	Height	Interior	Housing Colour	Body Material	SKU
	Profile Aluminium/Opal	Surface	2M	15mm	8mm	8mm	Aluminium	Aluminium	ILAR-01033
	Profile Aluminium/Opal	Surface	2M	13mm	6.9mm	10mm	White	Aluminium	ILAR-02122
	Profile Aluminium/Opal	Surface	2M	17.5mm	8mm	15mm	Aluminium	Aluminium	ILAR-00469
	Profile Aluminium/Opal	Surface	2M	17.3mm	7.6mm	12.3mm	White	Aluminium	ILAR-02314
	Profile Aluminium/Opal	Surface	2M	17.3mm	7.6mm	12.3mm	Black	Aluminium	ILAR-02315
	Profile Aluminium/Opal	Surface	2M	17.5mm	14mm	12mm	Aluminium	Aluminium	ILAR-01034
	Profile Aluminium/Opal	Surface	2M	25mm	15mm	23mm	Aluminium	Aluminium	ILAR-03290
	Profile Aluminium/Opal	Surface	2M	20mm	21mm	17mm	Aluminium	Aluminium	ILAR-01229
	Profile Aluminium/Opal	Surface	2M	23.5mm	10mm	20mm	Aluminium	Aluminium	ILAR-02103
	Profile “U” Aluminium/Opal	Surface	2M	55mm	33mm	50mm	Aluminium	Aluminium	ILAR-01038

ALUMINUM PROFILE FOR LED STRIP

		Installation	Length	Width	Height	Interior	Cut-out	Housing Colour	Body Material	SKU
	Profile Aluminium/Opal	Recessed	2M	24.5mm	7.5mm	12mm	17.5mm	Aluminium	Aluminium	ILAR-00465
	Profile Aluminium/Opal	Recessed	2M	24.5mm	7.69mm	12.3mm	17.5mm	White	Aluminium	ILAR-02316
	Profile Aluminium/Opal	Recessed	2M	24.5mm	7.69mm	12.3mm	17.5mm	Black	Aluminium	ILAR-02317
	Profile Aluminium/Opal	Recessed	2M	25mm	14mm	12mm	16mm	Aluminium	Aluminium	ILAR-01035
	Profile Aluminium/Opal	Recessed	2M	25mm	14.4mm	14mm	17.4mm	White	Aluminium	ILAR-02318
	Profile Aluminium/Opal	Recessed	2M	24.99mm	14.47mm	14.3mm	17mm	Black	Aluminium	ILAR-03329
	Profile Aluminium/Opal	Recessed	2M	30mm	10mm	20.7mm	23mm	Aluminium	Aluminium	ILAR-01251
	Profile Aluminium/Opal	Recessed	2M	43mm	20mm	28mm	30mm	Aluminium	Aluminium	ILAR-01199
	Profile “U” Aluminium/Opal	Recessed	2M	62mm	35.3	45mm	48.5mm	Aluminium	Aluminium	ILAR-01037

		Installation	Length	Width	Height	Interior	Cut-out	Angle	Housing Colour	Body Material	SKU
	Profile Aluminium/Opal	Recessed	2M	55mm	12mm	12.8mm	15.35mm	-	Aluminium	Aluminium	ILAR-02746
	Profile Aluminium/Opal	Recessed	2M	58mm	12mm	21.07mm	23mm	-	Aluminium	Aluminium	ILAR-02747
	Profile Aluminium/Opal	Recessed	2M	51mm	12.5mm	13mm	15mm	-	Aluminium	Aluminium	ILAR-03046
	Profile Aluminium/Opal	Recessed	2M	56mm	12.5mm	18mm	20mm	-	Aluminium	Aluminium	ILAR-03047
	Profile Aluminium/Opal	Recessed	2M	90mm	35mm	21.3mm	46.8mm	115°	White	Aluminium	ILAR-01508

ALUMINUM PROFILE FOR LED STRIP

		Installation	Length	Width	Height	Interior	Housing Colour	Body Material	SKU
	Profile Aluminium Round Corner/Opal	Surface	2M	16mm	16mm	10mm	Aluminium	Aluminium	ILAR-00467
	Profile Aluminium Square Corner/Opal	Surface	2M	16mm	16mm	10mm	Aluminium	Aluminium	ILAR-00466

		Installation	Length	Width	Height	Interior	Housing Colour	Body Material	SKU
	Profile Aluminium/Opal Flexible	Surface	2M	18mm	6.4mm	13.2mm	Aluminium	Aluminium	ILAR-02104
	Profile Aluminium/Opal Tube Round (320°)	Surface Pendant	2M	Ø30mm	Ø30mm	21mm	Aluminium	Aluminium	ILAR-02319
	Profile Aluminium/Opal Baseboard	Surface	2M	18mm	80mm	12.5mm	Aluminium	Aluminium	ILAR-01507

ACCESSORIES FOR LED STRIP

		SKU
	Touch Sensor ON/OFF and Dimmer	ILDV-00008
	Sensor PIR	ILDV-00009
	Hand Sensor ON/OFF and Dimmer	ILDV-00010



ARON

Copyright © Aronlight, 2026

All rights reserved. No part of this catalogue may be reproduced in any form on by an electronic or mechanical means, including information storage and retrieval systems, without permission in writing from Aronlight.

Todos os direitos reservados. Nenhuma parte deste catálogo pode ser reproduzida de qualquer forma por meios eletrônicos ou mecânicos, incluindo sistemas de armazenamento e recuperação de informações, sem a permissão por escrito da Aronlight.

Reservados todos los derechos. Ninguna parte de este catálogo se puede reproducir de ninguna forma por medios electrónicos o mecánicos, incluidos los sistemas de almacenamiento y recuperación de información, sin el permiso por escrito de Aronlight.

Tutti i diritti riservati. Nessuna parte di questo catalogo può essere riprodotta in qualsiasi forma con mezzi elettronici o meccanici, compresi i sistemi di archiviazione e recupero delle informazioni, senza l'autorizzazione scritta di Aronlight.

Tous droits réservés. Aucune partie de ce catalogue ne peut être reproduite sous quelque forme que ce soit, par des moyens électroniques ou mécaniques, y compris les systèmes de stockage et de récupération d'informations, sans l'autorisation écrite d'Aronlight.

CONTACTS

Office – Lisboa
Estrada Outurela, 131A
2790-118 – Carnaxide
Portugal

Office – Centro de Negócios da Maia – Porto
Rua Albino José Domingues, 62
4470-557, Moreira-Maia
Portugal

Office – Madrid
Calle Velazquez, 24, 2° Izda
28001, Madrid
Spain

Office – Roma
Via Paganico, 56
00049, Velletri
Italy

Logistics – Sintra
Sítio das Algadroeiras
Rua do Porteval
2705-841, Godigana
Portugal

www.aronlight.com

comercial@aronlight.pt
export@aronlight.com

DOWNLOAD CATALOG

Cofinanciado pela União Europeia

ARON